

MODUX 1 SQUARE

By LuxR


OUTDOOR

The LuxR™ Modux 1 Square recessed luminaire is designed to be mounted either in the ground or on the floor as a low profile uplighter, or in walls or steps to illuminate paths and stairways. It can be installed either outdoors or indoors.

PROJECT

TYPE

NOTES

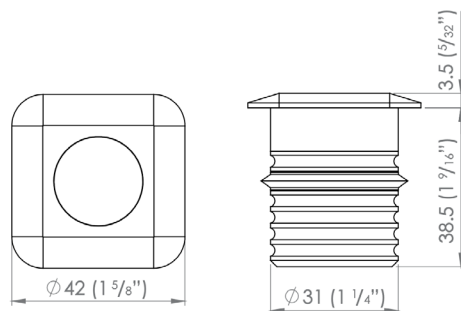

GENERAL SPECIFICATIONS

LED	1 W
LUMENS	80 Lm
EFFICACY	80 Lm / W
COLOUR TEMPERATURE	2700K 3000K 4000K
MATERIAL	Natural Copper 316 Stainless Steel Powder Coated Aluminium
FINISH	Black, Copper, Stainless Steel
BEAM	15°, 30°, 53°, 50+17°
CRI	90+
IP	68
WARRANTY	10 Years: Copper & Stainless Steel 5 Years: Electronics & Aluminium
ORIGIN	New Zealand

POWER SPECIFICATIONS


DRIVER	SERIES WIRING	350mA Constant Current (Remote)
DRIVER	PARALLEL WIRING	12VAC (Integral) Remote 12V Transformer Required 24VDC (Integral) Remote 24V Driver Required

PRODUCT CODES (SERIES WIRING)

BLACK	128-M1SRABK1530
COPPER	128-M1SRC1530
STAINLESS STEEL	128-M1SRS1530
PARALLEL WIRING AVAILABLE UPON REQUEST	

SERIES WIRING

INPUT 240VAC OUTPUT DC Constant Current



PARALLEL WIRING

INPUT 240VAC OUTPUT 12VAC | 24VDC

