



radiantlighting®

## BORDER LIGHT

By Hunza


**OUTDOOR**

The Border Light is ideal for path lighting, giving a wide spread of light with no upward projection. The fully adjustable arm allows 360 degree rotation and 0-90 degree elevation. Each luminaire is supplied with a frosted glass lens to further reduce glare.

## PROJECT

TYPE

NOTES

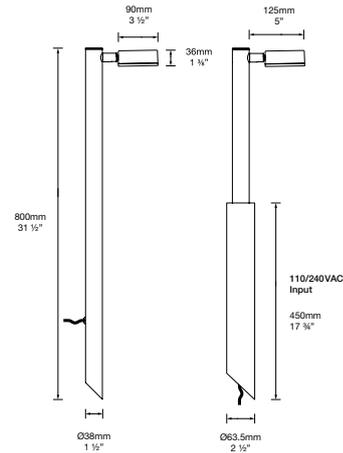

### GENERAL SPECIFICATIONS

<b>LED</b>	2W
<b>LUMENS</b>	120Lm
<b>EFFICACY</b>	60 Lm / W
<b>COLOUR TEMPERATURE</b>	2700K / 3000K / 4000K
<b>MATERIAL</b>	Powder Coated Aluminium, Solid Bronze, Copper, Stainless Steel
<b>FINISH (ALUMINIUM)</b>	Black, Bronze, Olive Green, White, White Birch, Dark Grey, Silver Star, Corten, Fine Silver
<b>FINISH (SOLID METAL)</b>	Solid Bronze With Copper Pole, Aged Solid Bronze With Copper Pole, 316 Stainless Steel, Electropolished 316 Stainless Steel
<b>CRI</b>	90+
<b>IP</b>	66
<b>WARRANTY</b>	5 Years
<b>ORIGIN</b>	New Zealand

### POWER SPECIFICATIONS

#### DRIVER CONSTANT CURRENT, SERIES WIRED, 2W

Requires constant current driver (not supplied).  
Fixture input: 3Vf @700mA maximum.

#### DRIVER 12VAC, PARALLEL WIRED, 1W

Requires magnetic/wire wound 12VAC transformer (not supplied).  
Fixture input: 12VAC, 1W (350mA).

#### DRIVER 12VAC, PARALLEL WIRED, 2W

Requires magnetic/wire wound 12VAC transformer (not supplied).  
Fixture input: 12VAC, 2W (700mA).

#### DRIVER 12VDC, PARALLEL WIRED, 2W

Requires constant voltage power supply (not supplied).  
Fixture input: 24VDC (2W, 700mA).

#### DRIVER 110/240VAC INPUT, PARALLEL WIRED, 2W

Integral constant current driver (supplied and installed).  
Fixture input: 110/240VAC (2W, 700mA).

### PRODUCT CODES (SERIES WIRING)

**CODES AVAILABLE UPON REQUEST**