



radiantlighting®

MODUX 2 & 4 SQUARE

By LuxR


OUTDOOR

The Modux Two & Four recessed luminaires are designed to be mounted either in the ground or floor as low profile uplighters, or in walls or steps to illuminate paths and stairways. They can be installed either outdoors or indoors and offer the option of either a round or square flange.

PROJECT

TYPE

NOTES

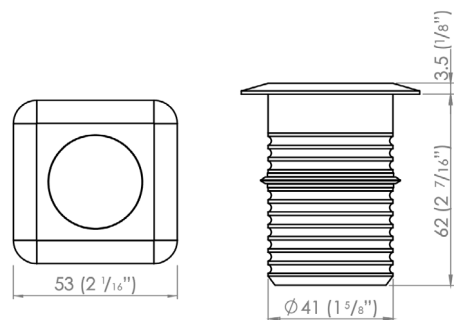

Cutout: \varnothing 43.5 mm

GENERAL SPECIFICATIONS

LED	2 W 4W
LUMENS	170 Lm 360 Lm
EFFICACY	85 Lm / W 90 Lm/W
COLOUR TEMPERATURE	2700K 3000K 4000K 5000K
MATERIAL	Natural Copper 316 Stainless Steel Powder Coated Aluminium
FINISH	Copper Stainless Steel Black
BEAM	26°, 74°
CRI	90+
IP	68
WARRANTY	10 Years: Copper & Stainless Steel 5 Years: Electronics & Aluminium
ORIGIN	New Zealand

POWER SPECIFICATIONS

DRIVER SERIES WIRING	700mA Constant Current (Remote)
DRIVER PARALLEL WIRING	12VAC (Integral) Remote 12V Transformer Required 24VDC (Integral) Remote 24V Driver Required


PRODUCT CODES (SERIES WIRING)

STAINLESS STEEL		BLACK	
M2 26°	128-M2SRS2630	M2 26°	128-M2SRABK2630
M2 74°	128-M2SRS7430	M2 74°	128-M2SRABK7430
M4 26°	128-M4SRS2630	M4 26°	128-M4SRABK2630
M4 74°	128-M4SRS7430	M4 74°	128-M4SRABK7430
COPPER			
M2 26°	128-M2SRC2630		
M2 74°	128-M2SRC7430		
M4 26°	128-M4SRC2630		
M4 74°	128-M4SRC7430		

PARALLEL WIRING AVAILABLE UPON REQUEST


SERIES WIRING

INPUT 240VAC OUTPUT DC Constant Current

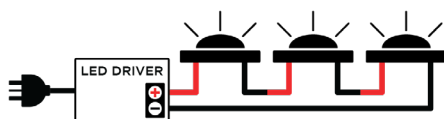

PARALLEL WIRING

INPUT 240VAC OUTPUT 12VAC | 24VDC

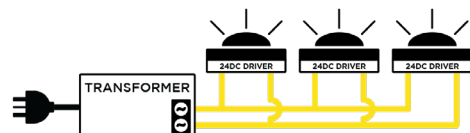

PERTH
+61 08 9240 1008
sales@radiantlighting.com.au

SYDNEY
1300 438 609
sales@radiantlighting.com.au

MELBOURNE
1300 438 609
sales@radiantlighting.com.au

BRISBANE
1300 438 609
sales@radiantlighting.com.au