



## CORE 70 TRACK



The Faze Core Track provides an ideal solution for accent lighting in both residential and commercial spaces. Available in 4 variants, there is an ideal option to suit any project.

### FEATURES

- + High CRI - Enhancing architectural features exceptionally
- + Adjustable 90° / Rotatable 350° via a unique off-set hinge design
- + Built in dimmable driver, for an easy install that still complements the final silhouette
- + High quality reflector, for superior light emission
- + Concealed sleek canopy, that ensures effective heat dissipation and safe housing of all components within the fitting
- + Compatible with remote Casambi CBU-TED Bluetooth Controllable Dimmer (71-CASCBU)



### GENERAL SPECIFICATIONS

LED	15W
Lumens	1300 lm (3000K)   1420 lm (4000K)
Efficacy	86 lm/w (3000K)   94 lm/w (4000K)
Colour Temperature	<input type="checkbox"/> 3000K, Warm White <input type="checkbox"/> 4000K, Cool White
Material	Powder Coated Aluminium
Finish	White   Black
Beam	15°   24°   36°   60°
CRI	92+
IP	20
Colour Deviation	SDCM ≤2
UGR	<16
Lifetime	>55,000hrs L80 B10
Warranty	5 Years

\*Please note, H Baffles also come with a Honeycomb lens

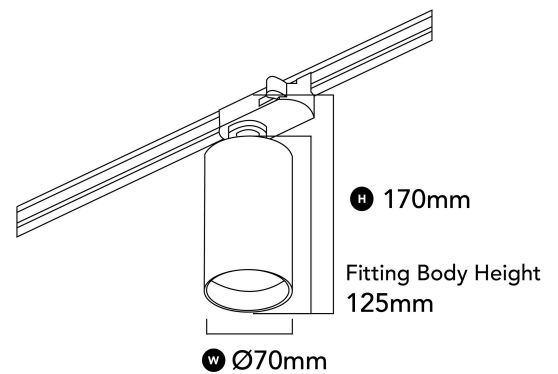
### PROJECT DETAILS

PROJECT:

TYPE:

NOTES:

### DIMENSIONS (mm)



### DRIVER SPECIFICATIONS























Power	350mA 240V Built-in Dimmable Driver
Dimming	Phase Cut Dimming
Power Factor	> 0.95

### PRODUCT CODES

White, 3000K, 60°	118-COTS15W603
White, 4000K, 60°	118-COTS15W604
Black, 3000K, 60°	118-COTS15B603
Black, 4000K, 60°	118-COTS15B604

### ACCESSORIES

15° Reflector	118-RFLC7015
24° Reflector	118-RFLC7024
36° Reflector	118-RFLC7036
Black Baffle	118-COR70BB
White Baffle	118-COR70BW
Gold Baffle	118-COR70BG
Black H Baffle	118-COR70HB
White H Baffle	118-COR70HW
Gold H Baffle	118-COR70HG

Component	Diagram		Description	Finishes	Product Code
Track Piece			3 circuit track, available in 1m or 2m lengths.	<div> <div>□ 1m, White</div> <div>■ 1m, Black</div> <div>□ 2m, White</div> <div>■ 2m, Black</div> </div>	<div>83-3C1MW</div> <div>83-3C1MB</div> <div>83-3C2MW</div> <div>83-3C2MB</div>
Feed Piece			The feed piece connects at the start of the track and supplies power to the entire track configuration.	<div>□ White</div> <div>■ Black</div>	<div>83-3CFPW</div> <div>83-3CFPB</div>
Dead End			The dead end connects at the end of the track and completes the track with a clean finish.	<div>□ White</div> <div>■ Black</div>	<div>83-3CDEW</div> <div>83-3CDEB</div>
Straight Connector			The straight connector joins two separate pieces of track together.	<div>□ White</div> <div>■ Black</div>	<div>83-3CSCW</div> <div>83-3CSCB</div>
Straight Connector Feed			The straight connector feed connects in the middle of two track pieces and supplies power to the entire track configuration. You can use a straight connector feed instead of a regular feed piece.	<div>□ White</div> <div>■ Black</div>	<div>83-3CSFW</div> <div>83-3CSFB</div>
Corner Connector			The corner connector is used to connect two pieces of track in a corner configuration. These pieces are available in both right and left. A corner connector also provides power to the track.	<div>□ Left, White</div> <div>□ Right, White</div> <div>■ Left, Black</div> <div>■ Right, Black</div>	<div>83-3CLCW</div> <div>83-3CRCW</div> <div>83-3CLCB</div> <div>83-3CRCB</div>
T Connector			The T connector is used to connect three pieces of track in a T configuration. A T connector also supplies power to the track.	<div>□ White</div> <div>■ Black</div>	<div>83-3CTCW</div> <div>83-3CTCB</div>
Cross Connector			The cross connector is used to connect four pieces of track in a cross configuration. The cross connector also supplies power to the track.	<div>□ White</div> <div>■ Black</div>	<div>83-3CCCW</div> <div>83-3CCCB</div>
Adaptor			<p>The adaptor is a clip-in device which comes as standard on every Faze track fitting. This device is used to connect the luminaire to the track.</p> <p>The adaptor can carry fittings of 5kg or less.</p>	<div>□ White</div> <div>■ Black</div>	<div>N/A</div> <div>Preassembled on fitting.</div>
Wire Suspension Kit			The wire suspension kit is used to suspend the track configuration.	<div>□ White</div> <div>■ Black</div>	<div>83-3CWSUPW</div> <div>83-3CWSUPB</div>
Universal Fixing Piece			A universal fixing piece can be used to mount the track in a fixed position.	<div>□ White</div> <div>■ Black</div>	<div>83-3CUFW</div> <div>83-3CUFB</div>