

PROJECT:

TYPE:

NOTES:




FEATURES

- + Allows a two light configuration.
- + Seamless styling.
- + 3mm ceiling detail.

DIMENSIONS (mm)

Product Dimensions

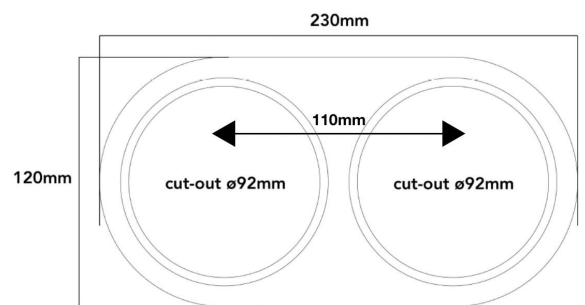

GENERAL SPECIFICATIONS

Fittings Required	2 x Edge 100
Material	Powder Coated Aluminium
Finish	White Black
Dimensions	230mm (w) x 120mm (h) x 3mm (d)
Warranty	7 Years

PRODUCT CODE

White	118-EDLFC2W
Black	118-EDLFC2B

***Please note:** Edge 100 fittings are supplied separately.

EDGE 100

A clean finish every time - the EDGE 100 downlight features a wider trim for ease of install, especially when recessed into concrete ceilings. Utilising advanced LED engines to achieve unmatched illumination with a fraction of the energy.



FEATURES

- + Adjustable head up to 25°.
- + Precision reflector with clear lens – for better light distribution.
- + Specially designed heat sink – for class leading heat dissipation.
- + Deep set lamp position – for visual comfort and glare control.
- + Next-Generation LED chip technology.



LUMINAIRE OPTIONS

LED Options

15W **STANDARD**

1320 lm (3000K)
1270 lm (4000K)

12W

1105 lm (3000K)
1150 lm (4000K)

10W

960 lm (3000K)
1000 lm (4000K)

Beam Options

60° **STANDARD**

36°

24°

15°

GENERAL SPECIFICATIONS

Efficacy Up to 95 lm/W

Colour Temperature

-  3000K, Warm White
-  4000K, Cool White

Material Powder Coated Aluminium

Finish White | Black

CRI 92+

IP 44

Colour Deviation SDCM ≤2

UGR <19

Lifetime >55,000hrs L80 B10

Warranty 7 Years


PROJECT DETAILS

PROJECT:

TYPE:

NOTES:

DIMENSIONS

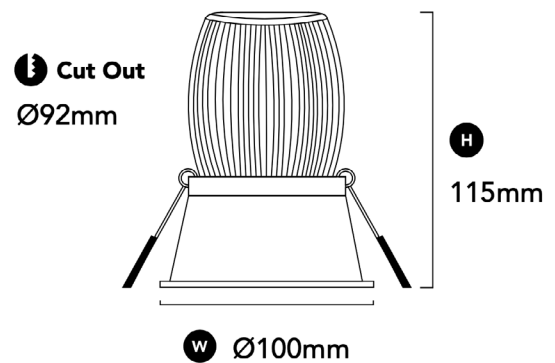

DRIVER SPECIFICATIONS

Dimensions

L 104 x W 43 x H 24 mm

Power

250mA | 300mA | 350mA
240V Remote Flicker Free
Dimmable Driver

Dimming

Phase Cut Dimming

Power Factor

> 0.90

DALI Dimming Available Upon Request

PRODUCT CODES

White, 3000K **118-ED2L13W603**

Black, 3000K **118-ED2L13B603**

White, 4000K **118-ED2L13W604**

Black, 4000K **118-ED2L13B604**

REFLECTOR CODES

36° Reflector **118-RFLP36**

24° Reflector **118-RFLP24**

15° Reflector **118-RFLP15**