

PROJECT DETAILS

PROJECT:

TYPE:




NOTES:

FEATURES

- + High quality, flexible COB strip
- + Available to order by the meter (up to 5m)
- + Can be cut in 50mm increments
- + 480 LEDs per/m



DIMENSIONS (mm)

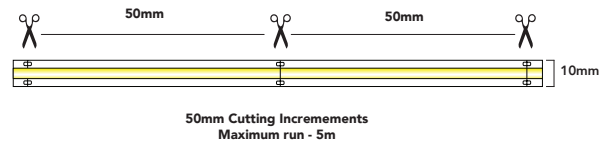

GENERAL SPECIFICATIONS

LED	5W p/m 10W p/m 15W p/m (24V DC)
Lumens	5W p/m: 502 lm (3000K) 542 lm (4000K) 10W p/m: 997 lm (3000K) 1107 lm (4000K) 15W p/m: 1492 lm (3000K) 1646 lm (4000K)
Efficacy	5W p/m: 100 lm/w (3000K) 108 lm/w (4000K) 10W p/m: 99 lm/w (3000K) 110 lm/w (4000K) 15W p/m: 99 lm/w (3000K) 109 lm/w (4000K)
Colour Temperature	<input type="checkbox"/> 3000K, Warm White <input type="checkbox"/> 4000K, Cool White
Material	PCB
Finish	White
Beam	120°
CRI	90+
IP	20
Colour Deviation	SDCM ≤2
Lifetime	>54,000hrs L70 B10
Warranty	5 Years

PRODUCT CODES

5W p/m, 3000K	10-FSC053
5W p/m, 4000K	10-FSC054
10W p/m, 3000K	10-FSC103
10W p/m, 4000K	10-FSC104
15W p/m, 3000K	10-FSC153
15W p/m, 4000K	10-FSC154
Strip to Strip Connector	10-FSCCON2
Strip to Strip Connector 150mm	10-FSCCON

COMPATIBLE CASAMBI DEVICES

BasicDIM 24V Wireless 4ch	71-CAS24V
BasicDIM Driver 24V 150W	71-CAS24V150
BasicDIM Driver 24V 100W	71-CAS24V100
BasicDIM Driver 24V 60W	71-CAS24V60
BasicDIM Driver 24V 35W	71-CAS24V35

PROFILE OPTIONS

Fusion H 20 Profile	Fusion A 25 Profile
Fusion H 30 Profile	Fusion S 17 Profile
Fusion S 20 Profile	Fusion R 23 Profile
Fusion S 30 Profile	