







## CAUTION - Light Fitting Must Be Installed By A Licensed Electrician.


- Please ensure to read instructiosn correctly for the installation of the fitting provided. Failure to do so will result in a void of warranty and compromises the safety of luminaire.
- FAZE are not liable for warranties when luminaire is damaged by incorrect installation. The installation of the luminiares must be in accordance with the national safety regulations.
- · If the external flexible cable or cord of the luminiare is damaged, it shall be exclusively replaced by the manufacturer or his service agent or similar qualified person in order to avoid a hazard.
- When using C-Bus, use universal or trailing edge dimming modules.
- Please refer to FAZE's General Terms & Conditions for more information concerning the installation and warranty of our products.

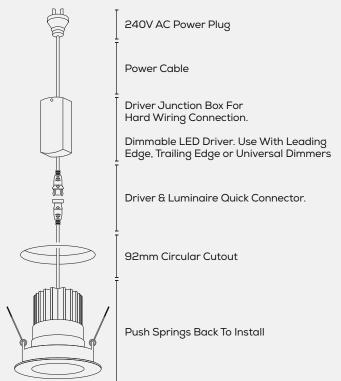






Create a 92mm circular cutout.

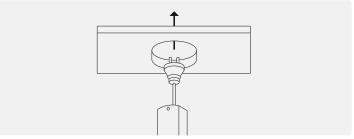


Connect the driver to the mains power socket - located in the ceiling cavity. Ensure the control gear is placed above any insulation.





Connect driver and luminaire together.






optimal efficiency we advise that the luminaire is not covered when installing.

## WARNING - RISK OF OVERHEATING OR FIRE IF THE CLEARANCE DISTANCES ARE COMPROMISED.

Minimum Clearance For Luminaire. In Accordance with AS/NZS 60598.2.2:2016

Suitable for residential or commercial use in Australia and New Zealand. Fitting may be abutted and covered according to AS/NZS 60598.2.2:2016, however for

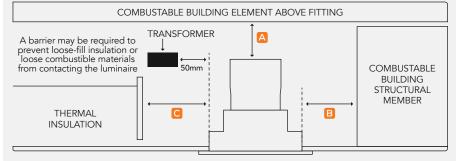

- **Height Clearance To Building Element (HCB)** Omm
- Side Clearance To Building Element (SCB)
- Side Clearance To Insulation (SCI)

Power	13W	Material		Powder Coated Aluminium			
Category	Downlight		CRI	92+	CLASS 3 (Luminaire		Only)
Warranty	7 Years		IP Rating	20 (Ceiling Space)		44 (Fa	scia)