



LITE 108

The high-performance FAZE LITE 108 features the latest in LED technology with high lumen per watt efficacy and visually dynamic illumination.

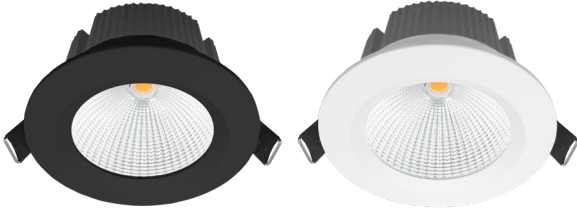

FEATURES

- + Precision reflector with clear lens - for better light distribution.
- + Specially designed heat sink - for class leading heat dissipation.
- + IC-4 rated
- + IP44 and suitable for wet areas.
- + Compatible with remote Casambi CBU-TED Bluetooth Controllable Dimmer (71-CASCBU) & with Casambi BasicDim Driver 13W (71-CAS350)

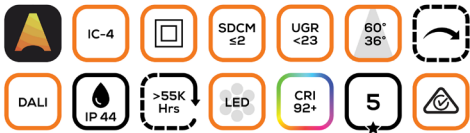

GENERAL SPECIFICATIONS

LED	10W	12W
Lumens	(3000K) 860 lm	1060 lm
	(4000K) 880 lm	1130 lm
Efficacy	Up to 91 lm/W	
Colour Temperature	3000K, Warm White	
	4000K, Cool White	
Material	Powder Coated Aluminium	
Finish	White Black	
Beam	60° 36°	
CRI	92+	
IP	44	
Colour Deviation	SDCM ≤2	
UGR	<23	
Lifetime	>55,000hrs L80 B10	
Warranty	5 Years	

Please Note: When using C-Bus, user universal or trailing edge dimming modules.

PROJECT DETAILS


PROJECT:

TYPE:

NOTES:

DIMENSIONS

Cut Out
Ø92mm

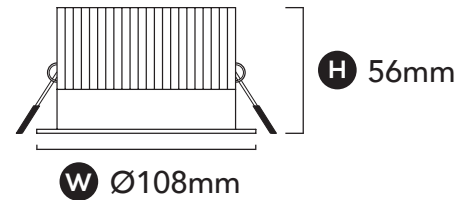

DRIVER SPECIFICATIONS

Dimensions	L 104 x W 43 x H 24
Power	250mA 300mA 240V Remote Dimmable Driver
Dimming	Phase Cut Dimming
Power Factor	> 0.90

DALI Dimming Available Upon Request

PRODUCT CODES

White, 3000K	118-LI2L12W603
Black, 3000K	118-LI2L12B603
White, 4000K	118-LI2L12W604
Black, 4000K	118-LI2L12B604

REFLECTOR CODES

36° Reflector	118-RFLL36
---------------	------------