



LITE MINI

The high-performance FAZE LITE MINI features the latest in LED technology with high lumen per watt efficacy and visually dynamic illumination.

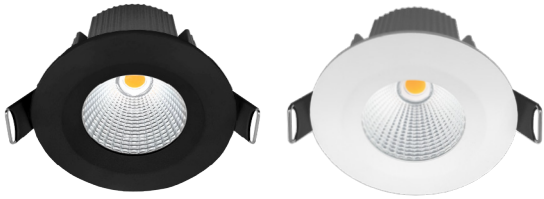

FEATURES

- + Precision reflector with clear lens - for better light distribution.
- + Specially designed heat sink - for class leading heat dissipation.
- + IC-4 rated
- + IP44 and suitable for wet areas.
- + Compatible with remote Casambi CBU-TED Bluetooth Controllable Dimmer (71-CASCBU) & with Casambi BasicDim Driver 13W (71-CAS350)

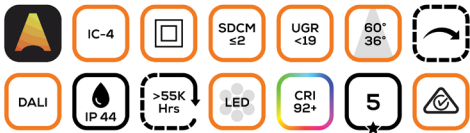

GENERAL SPECIFICATIONS

LED		8W	10W
Lumens	(3000K)	750 lm	960 lm
	(4000K)	830 lm	1040 lm
Efficacy		Up to 96 lm/W	
Colour Temperature		3000K, Warm White	4000K, Cool White
Material		Powder Coated Aluminium	
Finish		White Black	
Beam		60° 36°	
CRI		92+	
IP		44	
Colour Deviation		SDCM ≤2	
UGR		<19	
Lifetime		>55,000hrs L80 B10	
Warranty		5 Years	

Please Note: When using C-Bus, user universal or trailing edge dimming modules.

PROJECT DETAILS


PROJECT:

TYPE:

NOTES:

DIMENSIONS

Cut Out
Ø76mm

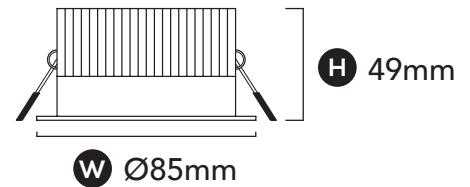

DRIVER SPECIFICATIONS

Dimensions	L 104 x W 43 x H 24
Power	200mA 250mA 240V Remote Dimmable Driver
Dimming	Phase Cut Dimming
Power Factor	> 0.90
DALI Dimming Available Upon Request	

PRODUCT CODES

White, 3000K	118-LI2M10W603
Black, 3000K	118-LI2M10B603
White, 4000K	118-LI2M10W604
Black, 4000K	118-LI2M10B604

REFLECTOR CODES

36° Reflector	118-RFLLM36
---------------	-------------