


LUNA STARLIGHT

Brighter than your average starlight, the FAZE LUNA provides an impressive light output with a narrow trim and deep recess.





FEATURES

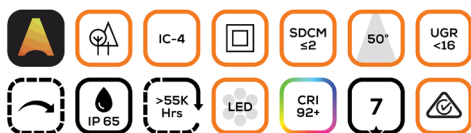- + Features a pre-connected driver which fits neatly through the fittings cut-out.
- + High efficacy – Powerful illumination with low energy consumption.
- + IP65 – Suitable for wet areas.
- + Compatible with remote Casambi CBU-TED Bluetooth Controllable Dimmer (71-CASCBU)



GENERAL SPECIFICATIONS

| | | |
|--------------------|---|--------|
| LED | 5W | |
| Lumens | (3000K) | 450 lm |
| | (4000K) | 505 lm |
| Efficacy | Up to 81 lm/W | |
| Colour Temperature |  3000K, Warm White | |
| |  4000K, Cool White | |
| Material | Powder Coated Aluminium | |
| Finish | White Black | |
| Beam | 50° | |
| CRI | 92+ | |
| IP | 65 | |
| Colour Deviation | SDCM ≤2 | |
| UGR | <16 | |
| Lifetime | >55,000hrs L80 B10 | |
| Warranty | 7 Years | |

Please Note: When using C-Bus, use universal or trailing edge dimming modules.


PROJECT DETAILS

PROJECT:

TYPE:

NOTES:

DIMENSIONS

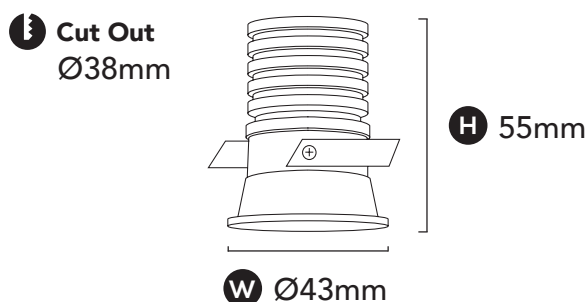

DRIVER SPECIFICATIONS

| | |
|-------------------------------------|-----------------------------------|
| Dimensions | L 97 x W 38 x H 22 |
| Power | 150mA 240V Remote Dimmable Driver |
| Dimming | Phase Cut Dimming |
| Power Factor | > 0.90 |
| DALI Dimming Available Upon Request | |

PRODUCT CODES

| | |
|--------------|----------------|
| White, 3000K | 118-LU2S05W503 |
| White, 4000K | 118-LU2S05W504 |
| Black, 3000K | 118-LU2S05B503 |
| Black, 4000K | 118-LU2S05B504 |