


LUNA STARLIGHT

Brighter than your average starlight, the FAZE LUNA provides an impressive light output with a narrow trim and deep recess.





FEATURES

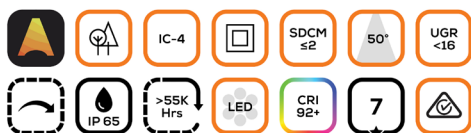- + Features a pre-connected driver which fits neatly through the fittings cut-out.
- + High efficacy – Powerful illumination with low energy consumption.
- + IP65 – Suitable for wet areas.
- + Compatible with remote Casambi CBU-TED Bluetooth Controllable Dimmer (71-CASCBU)



GENERAL SPECIFICATIONS

LED	3W	
Lumens	(3000K)	450 lm
	(4000K)	505 lm
Efficacy	Up to 81 lm/W	
Colour Temperature	 3000K, Warm White	
	 4000K, Cool White	
Material	Powder Coated Aluminium	
Finish	White Black	
Beam	50°	
CRI	92+	
IP	65	
Colour Deviation	SDCM ≤2	
UGR	<16	
Lifetime	>55,000hrs L80 B10	
Warranty	7 Years	

Please Note: When using C-Bus, use universal or trailing edge dimming modules.


PROJECT DETAILS

PROJECT:

TYPE:

NOTES:

DIMENSIONS

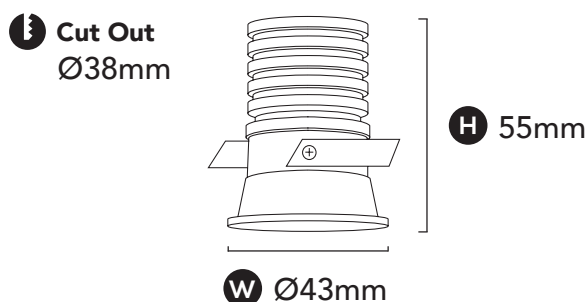

DRIVER SPECIFICATIONS

Dimensions	L 97 x W 38 x H 22
Power	150mA 240V Remote Dimmable Driver
Dimming	Phase Cut Dimming
Power Factor	> 0.90
DALI Dimming Available Upon Request	

PRODUCT CODES

White, 3000K	118-LU2S05W503
White, 4000K	118-LU2S05W504
Black, 3000K	118-LU2S05B503
Black, 4000K	118-LU2S05B504