


LINE OPAL RECESSED

The Line Opal series is practical and stylish. With numerous mounting and design options, they provide flexibility across both residential and commercial projects.



FEATURES

- + Recessed Design Providing Simplicity & Functionality.
- + Quick and Easy Connection System
- + Easy Installation Into Ceiling With Spring Clips Attached To Fitting.
- + 1-10V Dimming & Non-Dimming Versions Available Upon Request.
- + Compatible with Remote Casambi CBU-TED Bluetooth Controllable Dimmer (71-CASCBU)

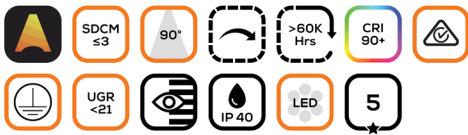

GENERAL SPECIFICATIONS

LED	15W	30W	45W	60W
Lumens (3000K)	1200Lm	2300Lm	3900Lm	4600Lm
(4000K)	1230Lm	2424Lm	3955Lm	4850Lm
Efficacy (3000K)	80Lm/W	76Lm/W	86Lm/W	76Lm/W
(4000K)	82Lm/W	81Lm/W	88Lm/W	81Lm/W

Colour Temperature

3000K, Warm White

4000K, Cool White

Material Powder Coated Aluminium

Finish White | Black

Beam 90°

CRI 90+

IP 40

UGR 21

Colour Deviation SDCM ≤3

Lifetime >60,000hrs L80 B10

Warranty 5 Years


PROJECT DETAILS

PROJECT:

TYPE:

NOTES:

DIMENSIONS

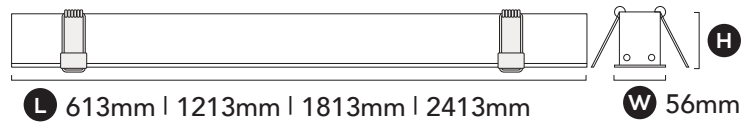

H With Mounting Clips 65mm
Without Mounting Clips 45mm

DRIVER SPECIFICATIONS

Power	240V Built-In, Flicker Free, Dimmable Driver 15W 300mA 30W 600mA 45W 900mA 60W 1200mA
Dimming	Phase Cut Dimming
Power Factor	> 0.90

PRODUCT CODES

613mm			
Black, 3000K	7-LR560615B903	Black, 4000K	7-LR560615B904
White, 3000K	7-LR560615W903	White, 4000K	7-LR560615W904
1213mm			
Black, 3000K	7-LR561230B903	Black, 4000K	7-LR561230B904
White, 3000K	7-LR561230W903	White, 4000K	7-LR561230W904
1813mm			
Black, 3000K	7-LR561845B903	Black, 4000K	7-LR561845B904
White, 3000K	7-LR561845W903	White, 4000K	7-LR561845W904
2413mm			
Black, 3000K	7-LR562460B903	Black, 4000K	7-LR562460B904
White, 3000K	7-LR562460W903	White, 4000K	7-LR562460W904