

PRO SQUARE

The new generation FAZE PRO downlight is specifically designed to enhance. Utilising superior LED technology and with the highest CRI, these recessed ceiling lights are guaranteed to bring your spaces to life.





FEATURES

- + Precision Reflector With Clear Lens - For Better Light Distribution.
- + Specially Designed Heat Sink - For Class Leading Heat Dissipation.
- + IC-4 Rated.
- + Black Baffle Design - Eliminates Glare For Optimum Visual Comfort.
- + Suitable For Concrete Install With Concrete Canister (Ordered Separately).
- + IP44 And Suitable For Wet Areas.
- + Compatible With Remote Casambi Cbu-ted Bluetooth Controllable Dimmer (71-CASCBU) & With Casambi BasicDim Driver 13W (17-CAS350).



GENERAL SPECIFICATIONS

LED		10W	12W	15W
Lumens	(3000K)	750 lm	830 lm	1015 lm
	(4000K)	805 lm	890 lm	1215 lm
Efficacy		Up to 78 lm/W		
Colour Temperature		3000K, Warm White		
		4000K, Cool White		
Material		Powder Coated Aluminium		
Finish		White Black		
Beam		60° 36° 24° 15°		
CRI		97+		
IP		44		
Colour Deviation		SDCM ≤2		
UGR		<19		
Lifetime		>55,000hrs L80 B10		
Warranty		7 Years		

Please Note: When using C-Bus, user universal or trailing edge dimming modules.


PROJECT DETAILS

PROJECT:

TYPE:

NOTES:

DIMENSIONS

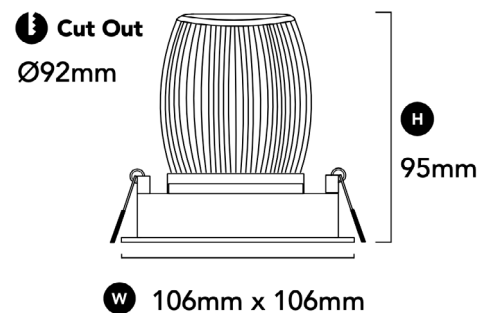

DRIVER SPECIFICATIONS

Dimensions	L 107 x W 43 x H 25 mm
Power	250mA 300mA 350mA 240V Remote Flicker Free Dimmable Driver
Dimming	Phase Cut Dimming
Power Factor	> 0.90
DALI Dimming Available Upon Request	

PRODUCT CODES

White, 3000K	118-PR7LS13W603
Black, 3000K	118-PR7LS13B603
White, 4000K	118-PR7LS13W604
Black, 4000K	118-PR7LS13B604

REFLECTOR CODES

15° Reflector	118-RFLP15
24° Reflector	118-RFLP24
36° Reflector	118-RFLP36