



F A Z E 2025
SURFACE MOUNTED



Surface Mounted

Surface mounted fittings have been a key piece of lighting design for decades. Their immense design value lies in their flexibility, since they can be installed in almost any space without dramatically altering the ceiling.

Updated




Core Specifications 4 36

New



Twist Specifications 8 38



Split Specifications 10 38



Kani Specifications 14 44



Vita Specifications 18 39



Silo Specifications 22 40



Luxe Specifications 26 42



Lucid T Specifications 30 43



More About Surface Mounted

Scan The QR Code To View
The Full Range On Our Website.

fazelight.com



The Core Series
Scan The QR Code to learn
more about the Core series.

Suspension Option See Full Catalogue


Track Option See Full Catalogue

Core

Stylish & High Quality

The Core simultaneously creates a stylish feature whilst also providing sufficient task lighting. This makes it ideal for areas with limited ceiling space.

Core G3

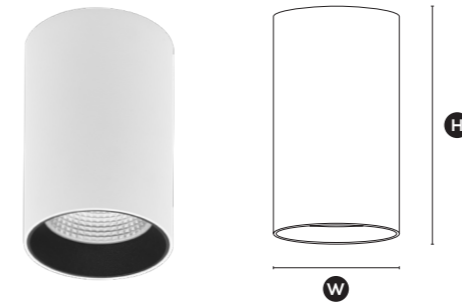


| | |
|------------|------------------------|
| LED | LUMENS (3000K 4000K) |
| 18W | 1800 1900 |
| EFFICACY | Up To 105 Lm/W |
| DIMENSIONS | H 150mm W Ø95mm |

Core XS **NEW**




| | |
|------------|------------------------|
| LED | LUMENS (3000K 4000K) |
| 11W | 1200 1300 |
| EFFICACY | Up To 118 Lm/W |
| DIMENSIONS | H 105mm W Ø95mm |

Core Adjustable 70

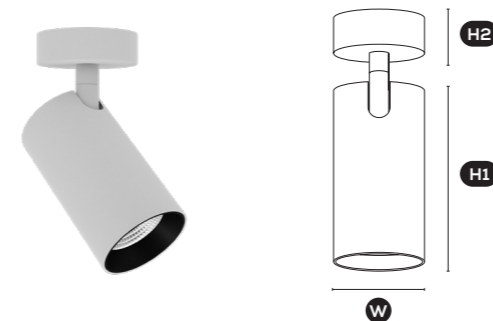

| | |
|------------|-----------------------------|
| LED | LUMENS (3000K 4000K) |
| 15W | 1300 1420 |
| EFFICACY | Up To 94 Lm/W |
| DIMENSIONS | H1 125mm W Ø70mm H2 30mm |

Core Adjustable 95

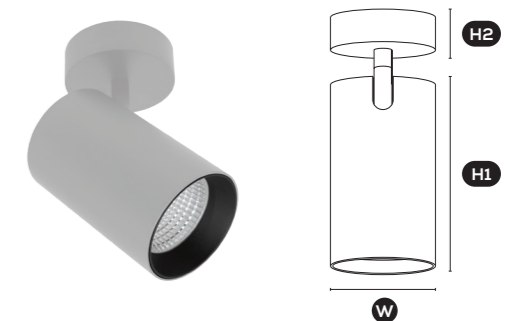

| | |
|------------|-----------------------------|
| LED | LUMENS (3000K 4000K) |
| 20W | 1850 1920 |
| EFFICACY | Up To 96 Lm/W |
| DIMENSIONS | H1 150mm W Ø95mm H2 30mm |

BEAM ANGLE



60°

STANDARD ADDITIONAL REFLECTOR OPTIONS



36°



24°



15°

LENS OPTIONS



Honeycomb Lens *1

*1 Available For the Core Adjustable Series Only

CORE XS ADDITIONAL LENS OPTIONS



40°



20°

BAFFLE OPTIONS



Powder Coated Black



Powder Coated White



Powder Coated Gold

FINISHES



Powder Coated Black



Powder Coated White



FEATURES



CRI 92+



Gen 3



Dimmable



Flicker Free

Core

Quick Connection System

The Core features a unique quick connection system, which has been designed for durability and easy installation.

Refined and Developed

Each part of the Core has been designed carefully and refined further over the years. Featuring a minimalistic aesthetic, smooth connection system, and high-quality materials. The Core series is the cornerstone of our surface mounted collection.

Recessed Mounting System

For creating a seamless finish between the luminaire and the ceiling surface.

Refined Aesthetic

Featuring a high quality powder-coated aluminium finish, with up to 12 unique combinations of options.


High-Quality Reflectors

Precision made reflectors & baffles allow our Core to effectively utilise its lumens.



Deep-set Dimmable Driver

Both the Core and Core Adjustable feature a built-in, deep set, dimmable driver. This feature provides a seamless design and easy installation.

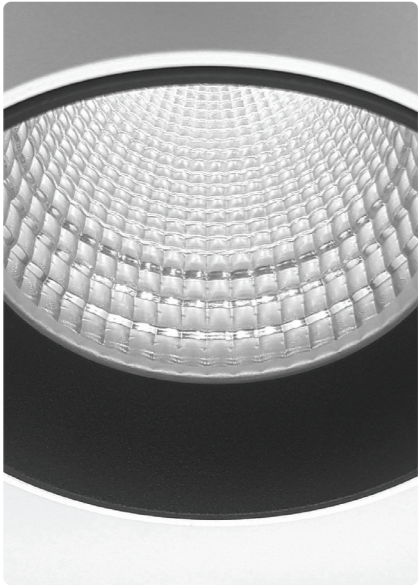

Refined Black Baffle

For visual comfort and reduced glare, the Core comes standard with a slim black baffle design.



High Quality Reflector

Creating a better light distribution, and contributing towards better performance.



Core Adjustable

Heat Distribution

Thermal management is at the forefront of our minds when crafting our luminaires. Our Core Adjustable series features a gap on the back to allow for hot air to vent. Keeping the heat away from our LED preserves its quality and extends its lifetime.

90° Tilt, 350° Rotation

Rotatable, flexible and dimmable; the Core Adjustable is the perfect light to meet all of your needs. Whether it be accent, task or ambient lighting, it is ideal as a bedside reading light, for highlighting artwork, or simply creating ambience.



Slimline Canopy

Designed with a minimalistic approach, this canopy suits any modern space with its clean and simple lines. Intentionally developed to ensure no screws are visible in every day use.

Unique Adjustable/Rotating Canopy

A unique canopy and hinge design that allows the Core Adjustable to be tilted up to 90° and rotated up to 350°.



Core XS NEW

Shorter Form Factor

Showcasing a shorter form factor, making it ideal for lower ceiling heights, or for those who prefer a more minimalistic style.



Twist New

A stylish feature to incorporate into any space, providing seamless light in any direction, with a 360° revolving hinge, and up to 90° rotation.

Twist



| | |
|------------------------------|----------------------------|
| LED | LUMENS (3000K 4000K) |
| 13W | 1400 1500 |
| EFFICACY | Up To 115 Lm/W |
| DIMENSIONS | H See Mounting Kit W Ø73mm |
| MOUNTING KIT SOLD SEPERATELY | |

Mounting Kit



| | |
|------------|---------|
| DIMENSIONS | H 150mm |
|------------|---------|

Recessed Mounting Kit



| | |
|------------|---------|
| DIMENSIONS | H 130mm |
|------------|---------|



Efficient Lighting

Featuring a lens & black baffle for reduced glare, the Twist ensures that the high quality LED chip is emitting lighting only where you need it to.



In-Line Canopy

Ideal for creating lighting solutions that look as good standard as they do adjusted.



Adjustable & Rotatable

With a full 360° rotation, and 90° adjustability, the Twist can face any direction you would need.

| BEAM ANGLE | ADDITIONAL LENS OPTIONS | FINISHES | BAFFLE OPTIONS | FEATURES |
|------------|-------------------------|--|--|-----------------------|
| 50° | 36° 25° 15° | Powder Coated Black Powder Coated White | Powder Coated Black Powder Coated White | CRI 90+ Flicker Free |



The Split Series
Scan The QR Code to learn
more about the Split series.

Track Option

See Full Catalogue

Split

Highly adaptable, the FAZE Split is the perfect design solution. Paired together or used individually, the Split has a modern design aesthetic that fits seamlessly into any interior space.



| | |
|------------|------------------------|
| LED | LUMENS (3000K 4000K) |
| 12W | 1085 1195 |
| EFFICACY | Up To 99 Lm/W |
| DIMENSIONS | H 200mm W Ø65mm |



High Lumen Efficiency

Manufactured with the highest quality components. The Split can output an exceptional amount of lumens, with an efficacy nearly over 100 lumens per watt.















Built In Phase-Cut Dimming

Featuring a built in dimmer, the Split allows for an easy and seamless installation.



Adjustable & Rotatable

The Split achieves both accent and task lighting due to its innovative rotating components.

| BEAM ANGLE | ADDITIONAL REFLECTOR OPTIONS | FINISHES | BAFFLE OPTIONS | FEATURES |
|---|---|--|--|--|
|  50° |  36°  25° |  Powder Coated Black  Powder Coated White |  Powder Coated Black  Powder Coated White  Powder Coated Gold |  90+  Flicker Free  <19  Dimmable |



Modern and Versatile Design

The Split was designed to be as versatile as possible, whilst still retaining a stylish aesthetic.

Discreet Lock-In Mount


The lock-in screws on the Split are discreet, complementing its minimalistic design.

Geometric Lines

The hinge design on the Split uses a geometric outline to suit any space it is used in.

Slim Design with Powder Coated Finish

A slim profile design and a powder coated finish once again assists the Split in retaining its modern appeal.

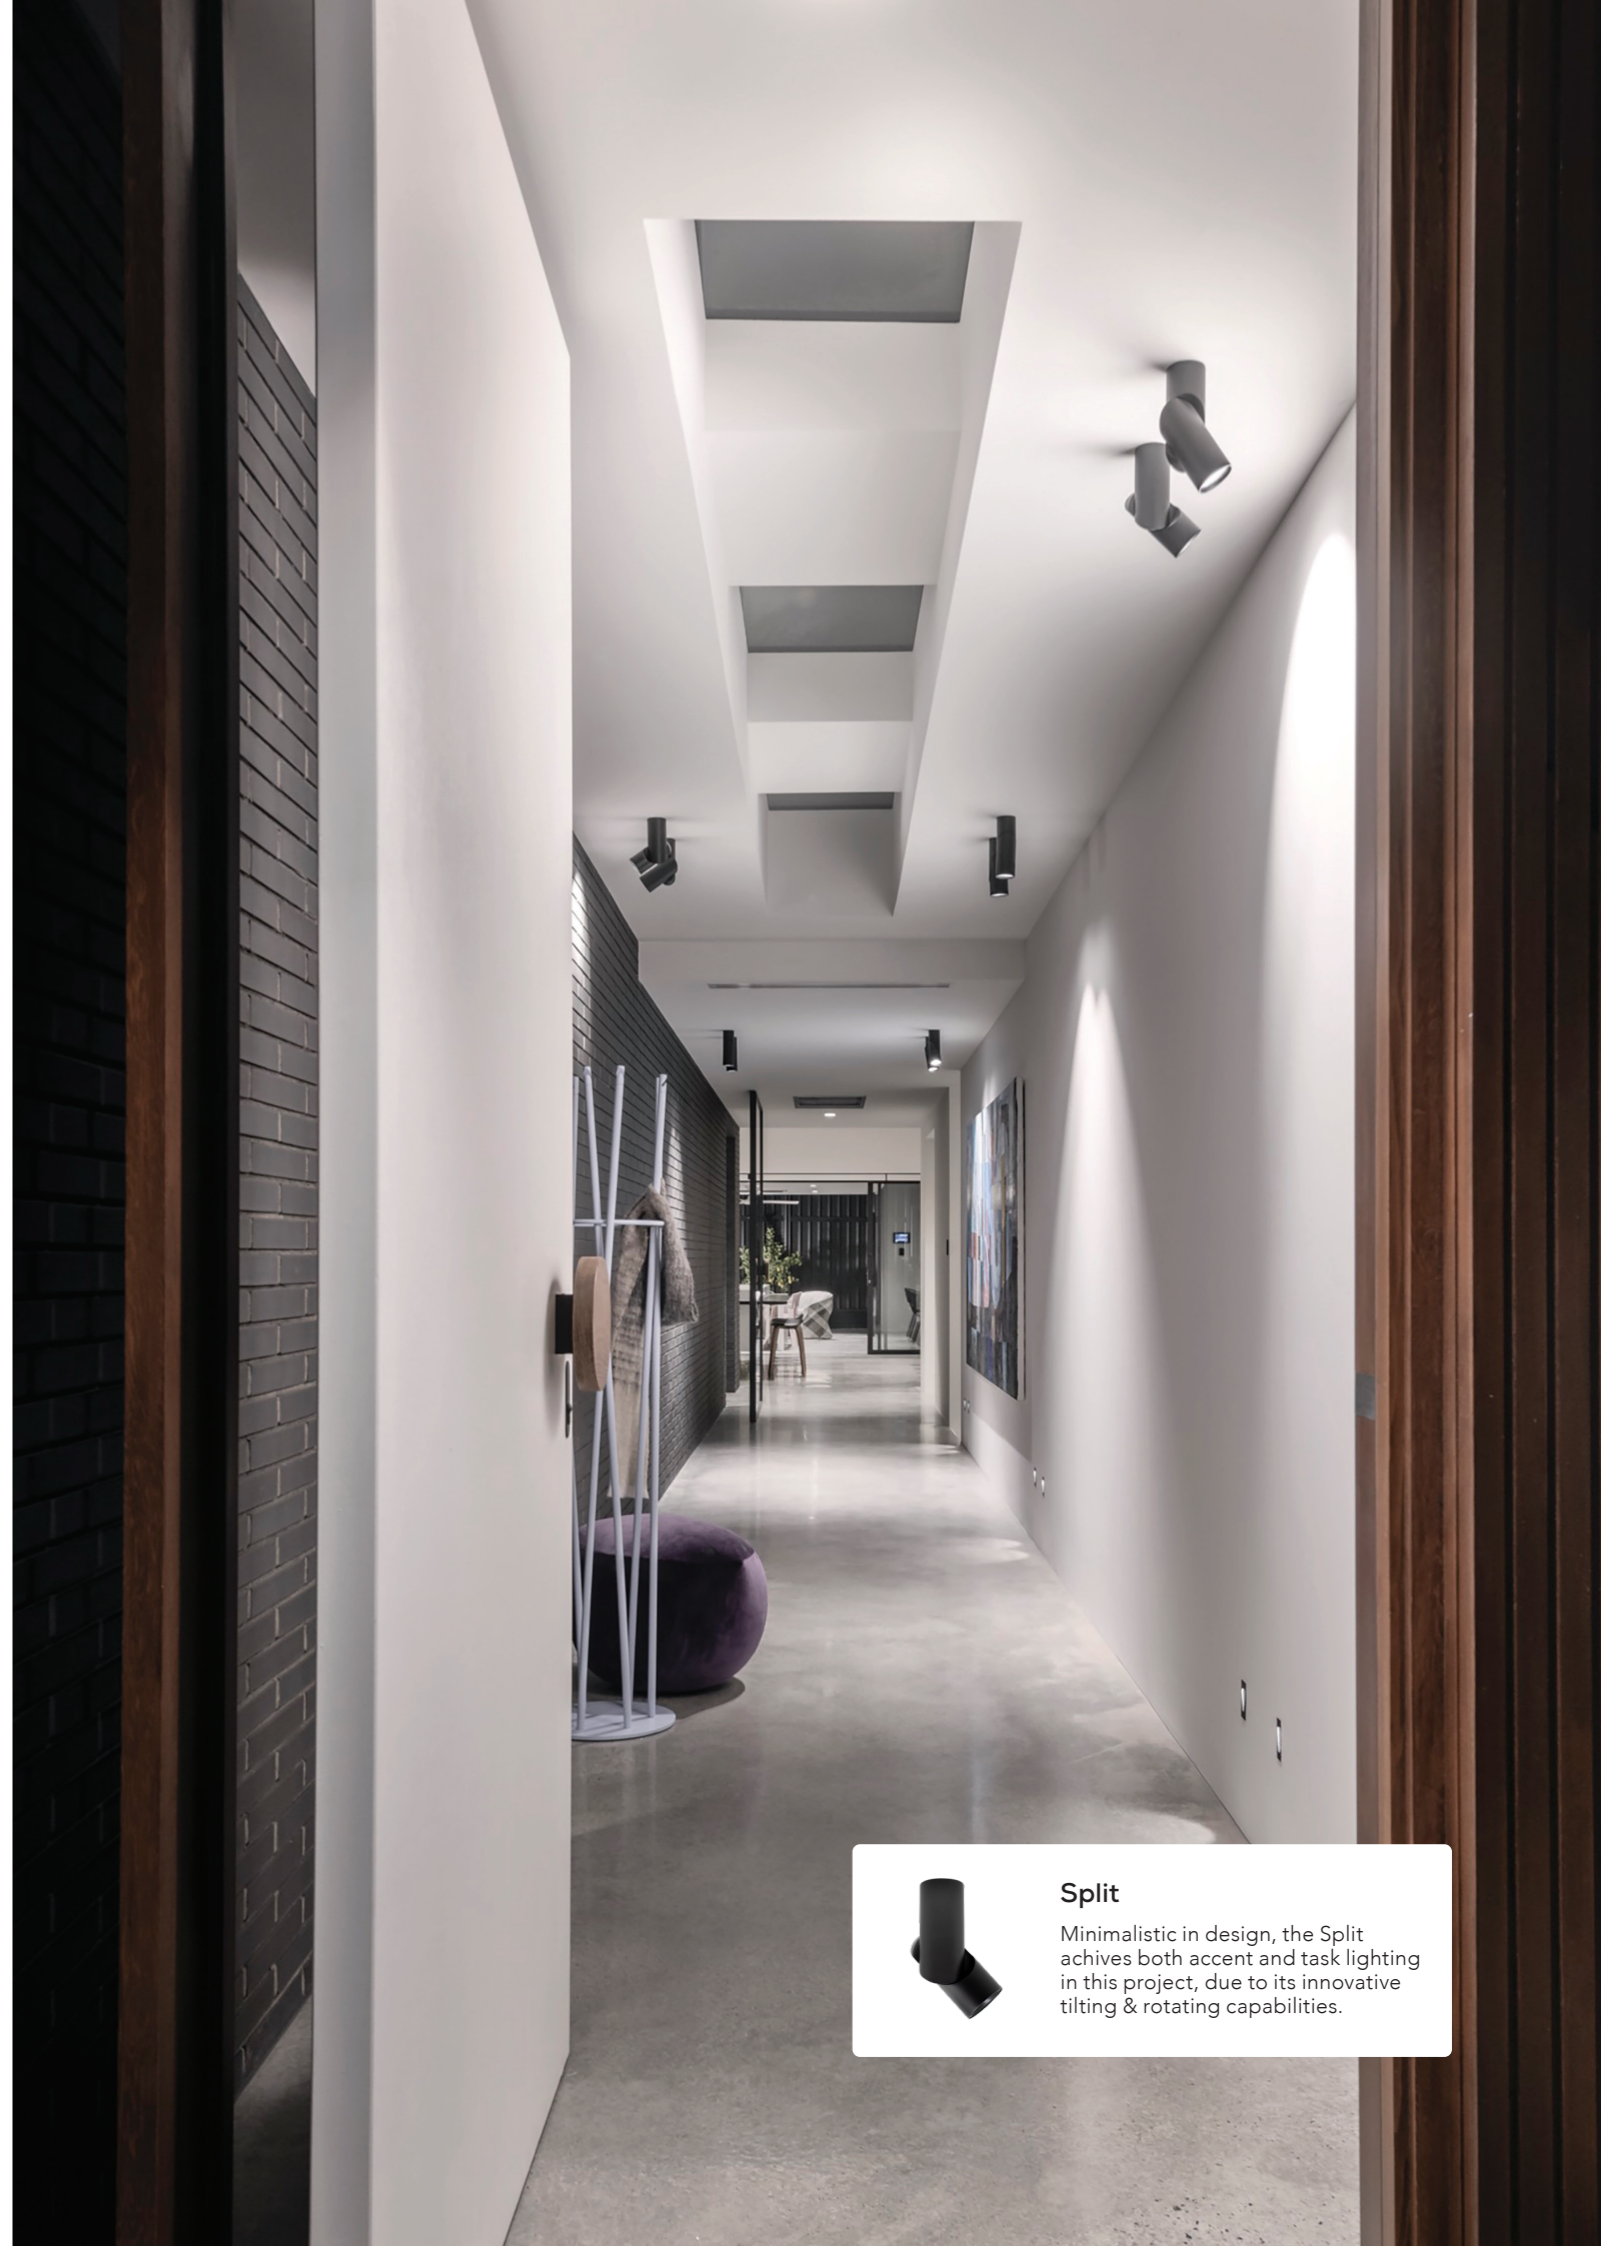

Split

Minimalistic in design, the Split achieves both accent and task lighting in this project, due to its innovative tilting & rotating capabilities.



The Kani Series
Scan The QR Code to learn
more about the Vita series.

Suspension Option See Full Catalogue


Kani

Practical & Aesthetic

With simple and decorative styling in mind, the Kani functions as both a practical and aesthetic light fixture.



| LED | LUMENS (3000K 4000K) |
|------------|--------------------------------|
| 15W | 1050 1230 |
| EFFICACY | Up To 82 Lm/W |
| DIMENSIONS | H 57mm W1 Ø130mm W2 Ø110mm |

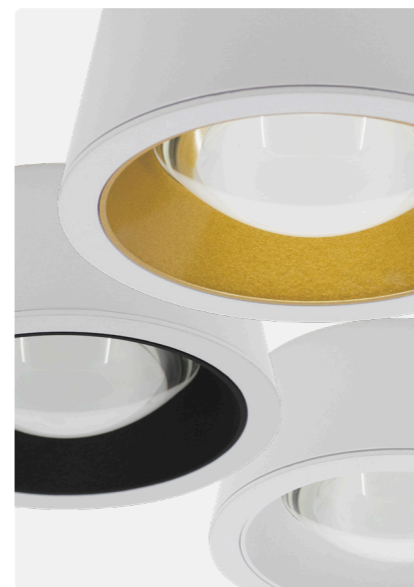

A New Decorative Addition

The Kani brings a new era of elegance to our surface mounted collection.



Interchangeable Baffle

The Kani encompasses interchangeable baffles, available in 3 finishes.



Flippable Diffuser

Creating different levels of ambience with each side of the flippable diffuser.

BEAM ANGLE



75°

FINISHES

- Powder Coated Black
- Powder Coated White

BAFFLE OPTIONS


- Powder Coated Black
- Powder Coated White
- Powder Coated Gold

FEATURES

- CRI 92+
- Dimmable

Specialised Optic Lens

The convex optic glass lens is more than a pretty feature of the Kani, it helps to evenly distribute the light emitted.

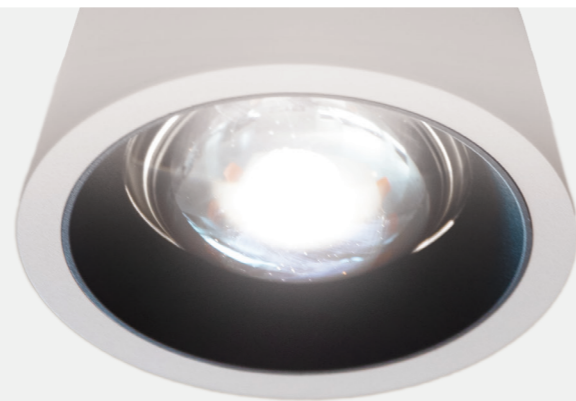


240V Dimmable LED Chip

Featuring a 240V LED chip, the Kani doesn't require a driver. This makes installation a breeze and results in a slim profile design.



Seamless Ceiling Mount

The Kani's ceiling application is seamless, with no visible mounting screws or gaps.

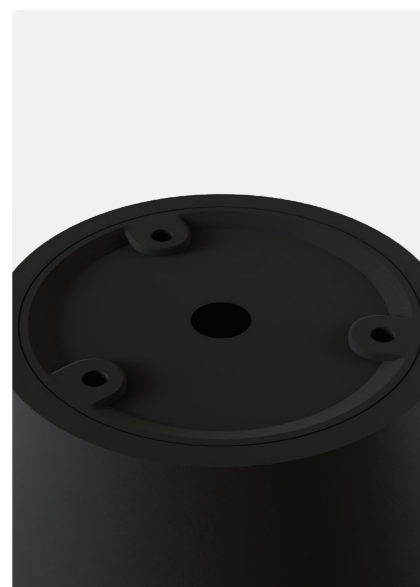

Quick Connection Canopy

The Kani has a quick connection system, which allows for simple installation to the ceiling.




Slim Profile Design

The Kani has a slim profile design, with clean lines and a modern aesthetic.



Kani

Featuring our Kani fitted with a gold baffle. The gold baffle produces a warmer illumination, which is ideal for relaxing environments.

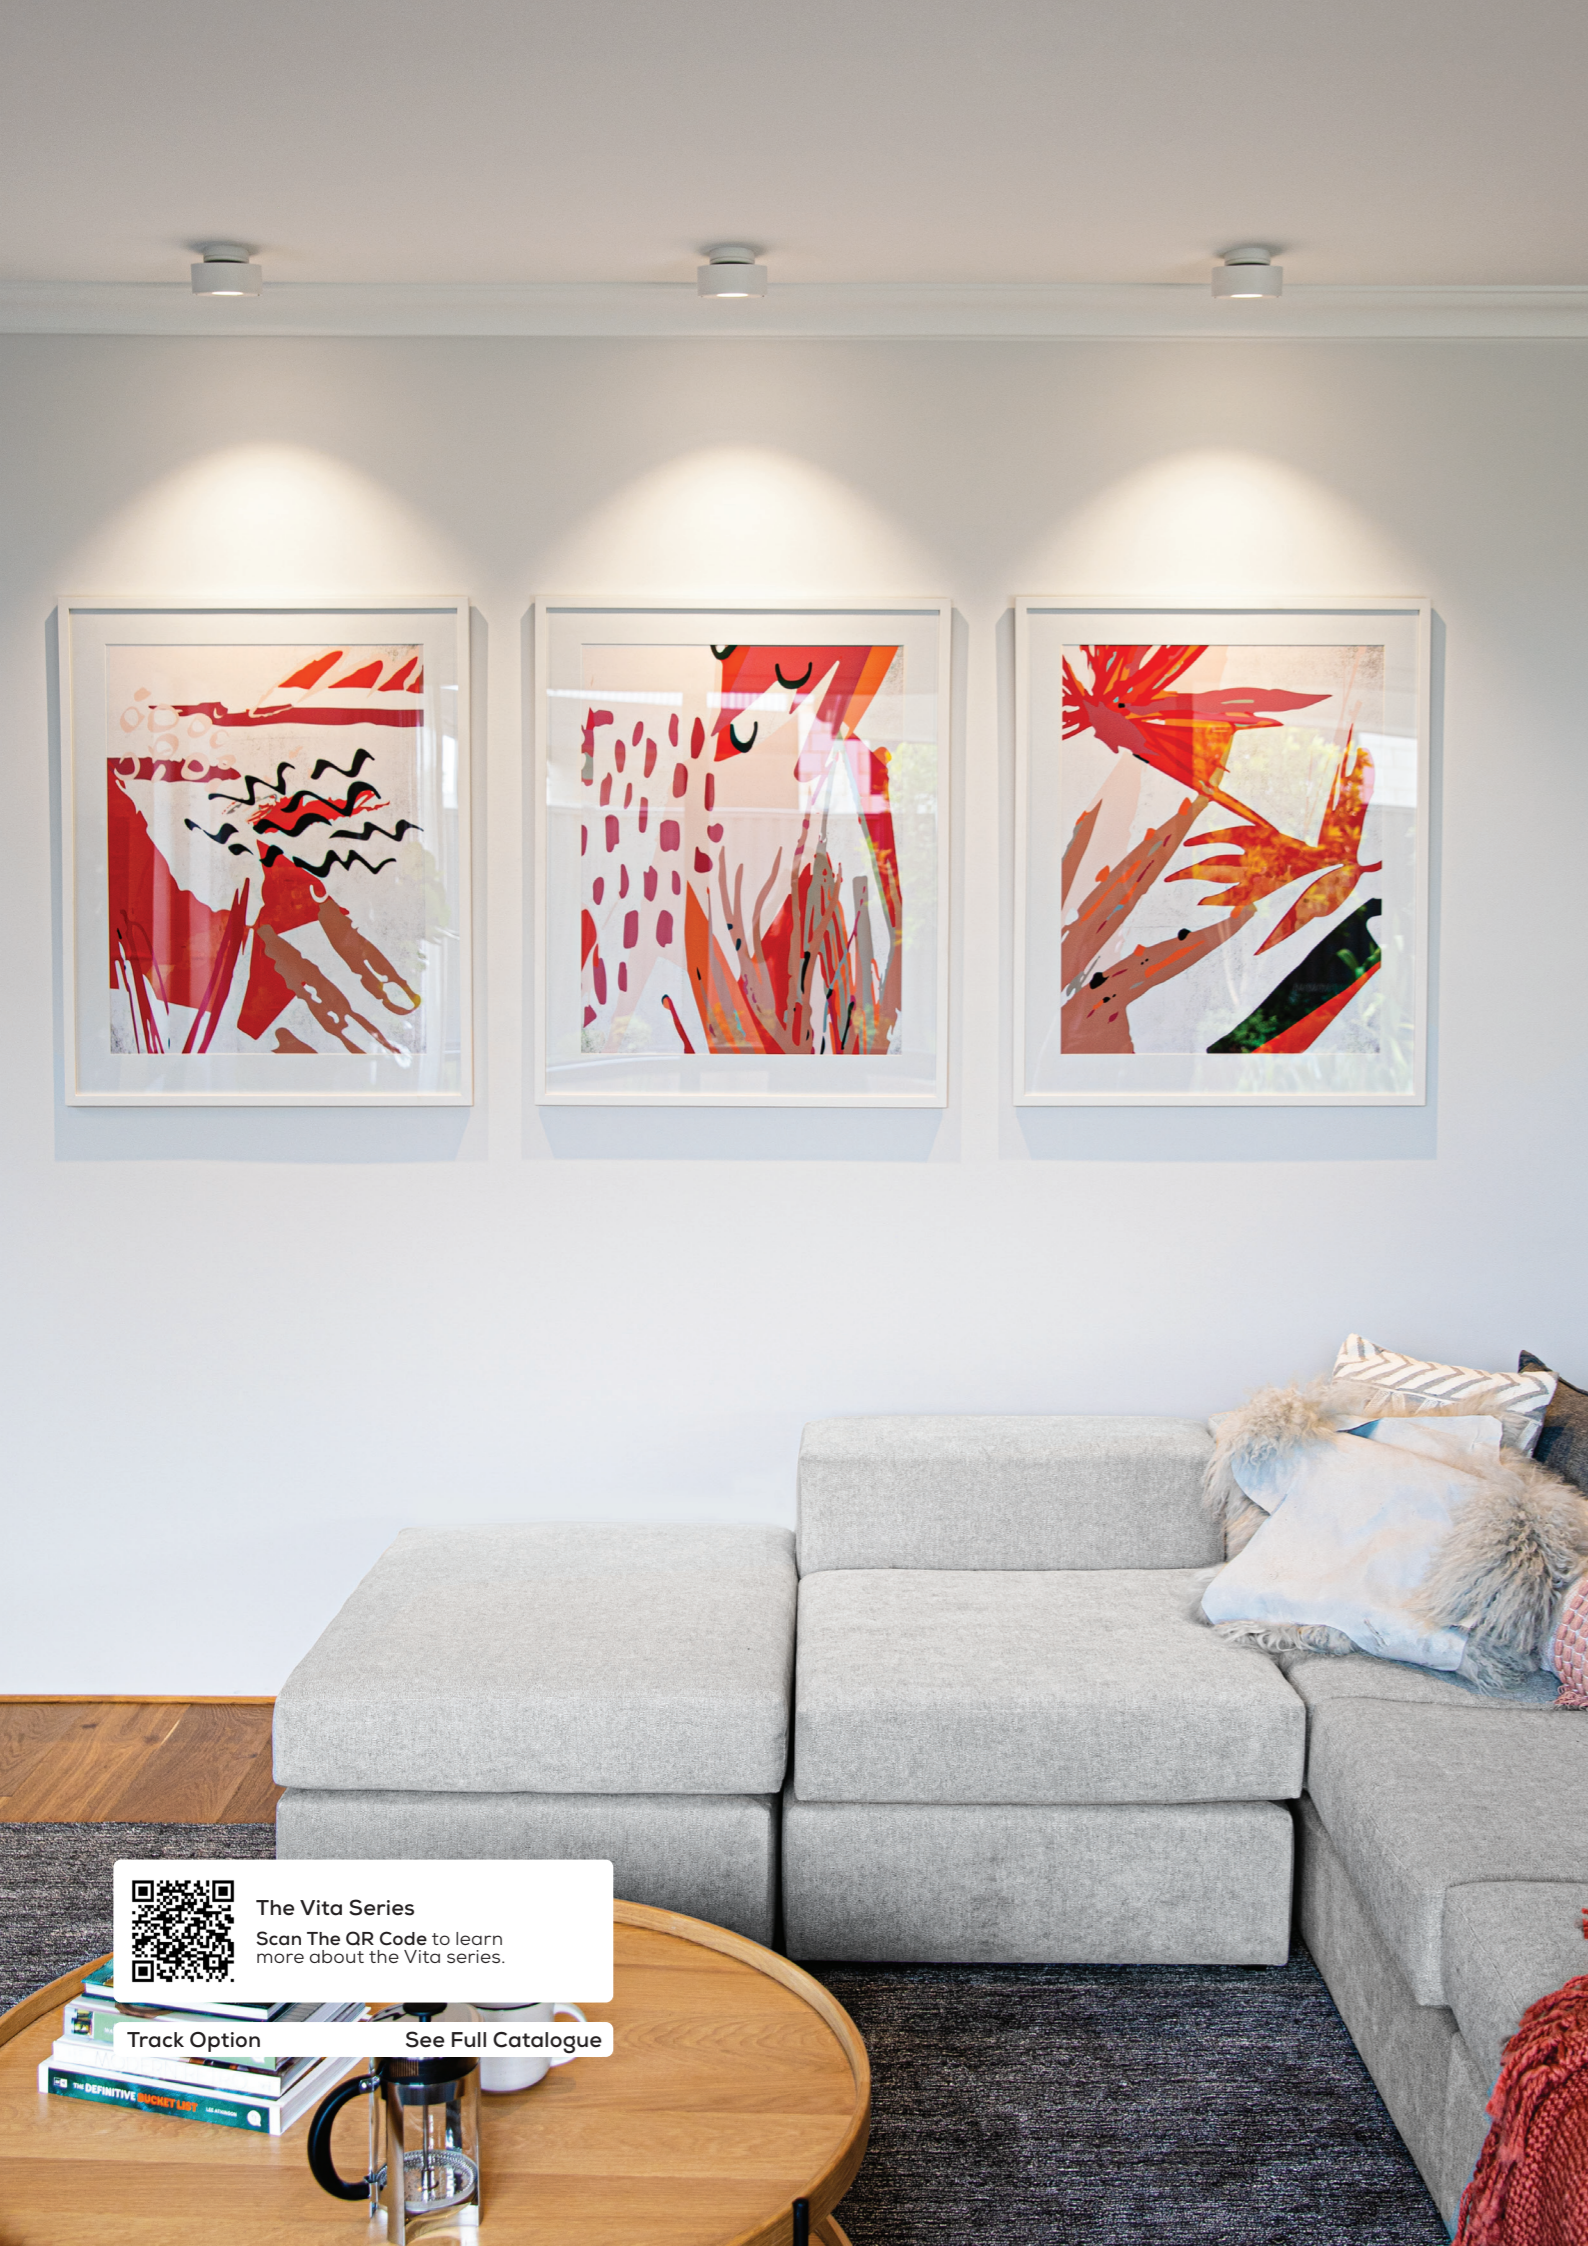

The Vita Series
Scan The QR Code to learn
more about the Vita series.

Track Option


See Full Catalogue

Vita

Sleek, Versatile, & Seamless

The Vita is sleek and versatile in design and fits seamlessly into both residential and commercial interior spaces. The flexibility of the Vita ensures unlimited design opportunities.

Vita Fixed

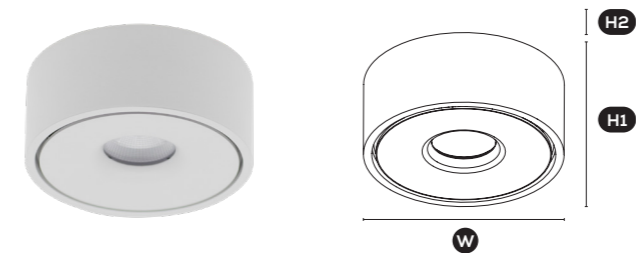

| | |
|------------|---|
| LED | LUMENS (3000K 4000K) |
| 12W | 1140 1180 |
| EFFICACY | Up To 98 Lm/W |
| DIMENSIONS | H1 47mm W Ø120mm H2 6mm Negative Detail From Surface |

Vita Adjustable






| | |
|------------|---------------------------------------|
| LED | LUMENS (3000K 4000K) |
| 12W | 1140 1180 |
| EFFICACY | Up To 98 Lm/W |
| DIMENSIONS | H1 66mm W1 Ø120mm H2 25mm W2 Ø76mm |

| BEAM ANGLE | ADDITIONAL REFLECTOR OPTIONS | FINISHES | FEATURES |
|------------|------------------------------|---|------------------|
| 50° | 36° 25° | Powder Coated Black Powder Coated White | CRI 90+ Dimmable |



Interchangeable Magnetic Snap-Lock Fascia



The Vita embodies a snap-lock front fascia, which is available in 3 different finishes. This allows for customisation to complement any interior space.

-  Powder Coated Black
-  Powder Coated White
-  Powder Coated Gold




Revolutionary Hinge Design

The Vita Adjustable features a revolutionary hinge design, allowing a 90° tilt and 350° rotation, all in one smooth motion.

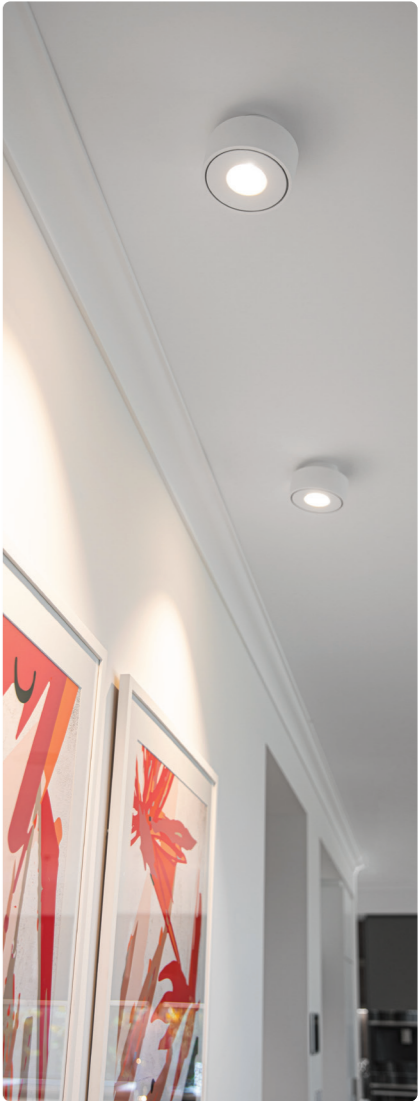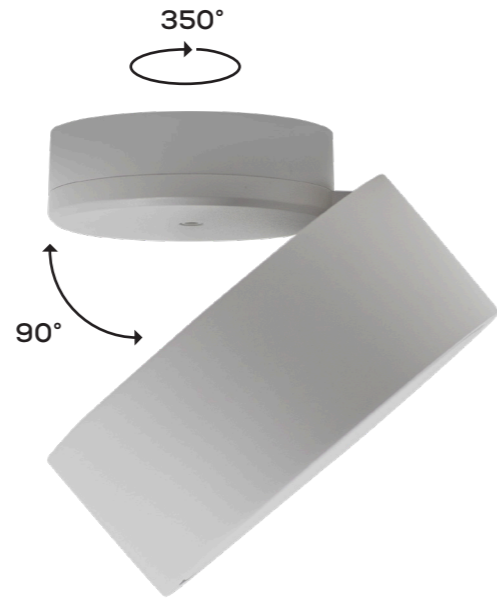

Quick Connection System

Our quick connection system makes the installation a breeze. Once the base plate has been installed, the fitting can just snap on, tool free.

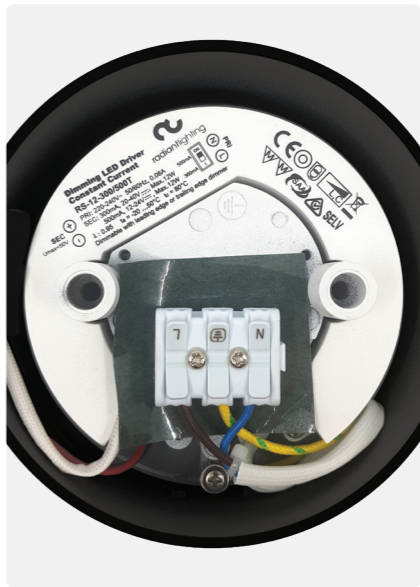

Specially Designed Driver

The Vita showcases a unique circular driver. Fully dimmable and specially designed for the Vita's circular shape.



High Lumen Output

The Vita showcases some of the highest output readings of its class, with an output of 1180+ lumens.



The Silo Series
Scan The QR Code to learn
more about the Silo series.

Suspension Option See Full Catalogue


Track Suspension Option See Full Catalogue

Silo Surface

Endless Design Opportunities

The Silo Surface has a simple yet adaptable design, providing endless design opportunities. With various heights and diameters available, the Silo Surface allows you to channel your inner creative and design a custom look that is unique to your project.

Silo Surface 40

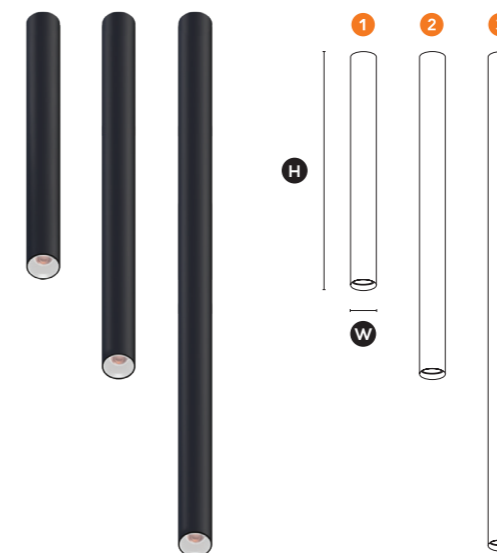

LED LUMENS (3000K | 4000K)

6W 520 | 520

EFFICACY Up To 87 Lm/W


DIMENSIONS

1 H 280mm W Ø40mm

2 H 380mm W Ø40mm

3 H 580mm W Ø40mm

Silo Surface 60

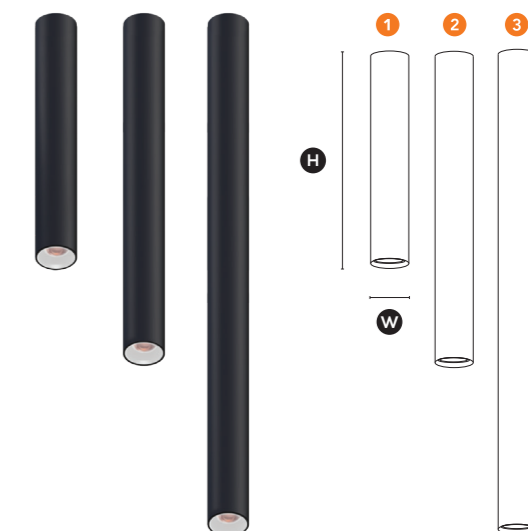

LED LUMENS (3000K | 4000K)

12W 1080 | 1080


EFFICACY Up To 90 Lm/W

DIMENSIONS

1 H 280mm W Ø60mm

2 H 380mm W Ø60mm

3 H 580mm W Ø60mm

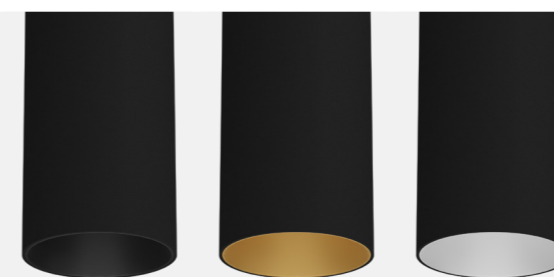

Interchangeable Baffle

The Silo encompasses interchangeable baffles, available in 3 finishes.

- Powder Coated Black **STANDARD**
- Powder Coated White
- Powder Coated Gold

BEAM ANGLE



60°

ADDITIONAL LENS OPTIONS



36°



24°



15°

FINISHES


- Powder Coated Black
- Powder Coated White

FEATURES

- CRI 92+
- UGR <15
- Flicker Free
- Dimmable

Quick Connection System

The quick connection system is designed for ease and simplicity, allowing a swift and effortless installation. This results in a seamless final product that adds to the design aesthetic of the fitting.

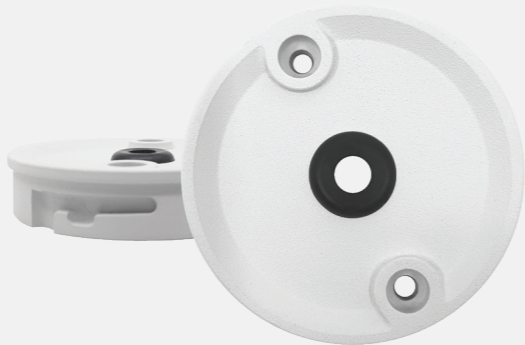

Cultivated Lens Innovation

The Silo Surface features the latest in lens technology, helping to guide virtually every ray of light emitted by the LED. The lens improves the efficiency of the fitting, enhances visual comfort and dramatically reduces glare.



Deep-Set Black Baffle

The Silo Surface incorporates a deep-set black baffle, which reduces glare and enhances visual comfort.



Inspired By Australia

Various silos in Australia have become iconic for their murals, which become an art movement back in 2015. These iconic Australian Silos have heavily inspired our Silo luminaires.



Slim, Modern Design


Created as a contemporary alternative to downlights, perfect over a kitchen island or dining table.

Infinite Design Options


With various heights and widths at hand, the Silo Surface creates a unique lighting feature when installed as a cluster.




Singular



Cluster



Linear



Cascading

Designed for Versatility

The Silo Surface series has been strategically designed to produce the best possible light, whilst also being durable, sustainable and stylish. Available in 5 different beam angles, it is the perfect choice for accent lighting.








The Luxe Series
Scan The QR Code to learn
more about the Luxe series.

Luxe

Architectonic and balanced, the Luxe series combines advanced LED technology with a refined, contemporary aesthetic. The Luxe series has been revamped and redesigned with a higher CRI and more wattage options.

Luxe Circle

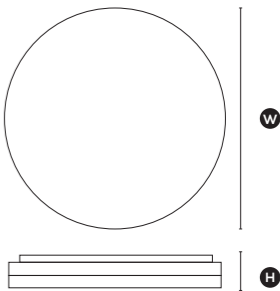




| LED | LUMENS (3000K & 4000K) |
|-------------------------|------------------------|
| 10W | 1000 |
| 15W | 1500 |
| EFFICACY Up To 100 Lm/W | |
| DIMENSIONS | |
| H 53mm | W Ø220mm |

| LED | LUMENS (3000K & 4000K) |
|-------------------------|------------------------|
| 18W | 1800 |
| 24W | 2400 |
| EFFICACY Up To 100 Lm/W | |
| DIMENSIONS | |
| H 49mm | W Ø270mm |

| LED | LUMENS (3000K & 4000K) |
|-------------------------|------------------------|
| 29W | 2900 |
| 38W | 3800 |
| EFFICACY Up To 100 Lm/W | |
| DIMENSIONS | |
| H 63mm | W Ø400mm |

Luxe Long

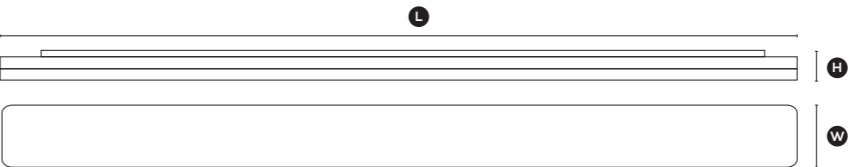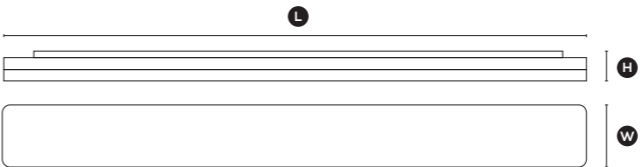

| LED | LUMENS (3000K & 4000K) |
|-------------------------|------------------------|
| 24W | 2400 |
| 32W | 3200 |
| EFFICACY Up To 100 Lm/W | |
| DIMENSIONS | |
| H 55mm | W 130mm L 900mm |

| LED | LUMENS (3000K & 4000K) |
|-------------------------|------------------------|
| 29W | 2900 |
| 38W | 3800 |
| EFFICACY Up To 100 Lm/W | |
| DIMENSIONS | |
| H 55mm | W 130mm L 1200mm |

BEAM ANGLE



110°

FINISHES



White Polycarbonate

FEATURES



CRI 90+



Flicker Free



IK10



IP 54



Dimmable

*1 Luxe Circle 400mm is IP20

*2 The Luxe Long Is Not Dimmable



Dot Free Illumination

Precise positioning of the LEDs allows for seamless light distribution.




90+ CRI

With an increased CRI of 90 from 80, the Luxe series is now more advanced at enhancing colours than ever before.



Easy Installation

The Luxe series features quick releases and large wiring spaces, for easy installation.

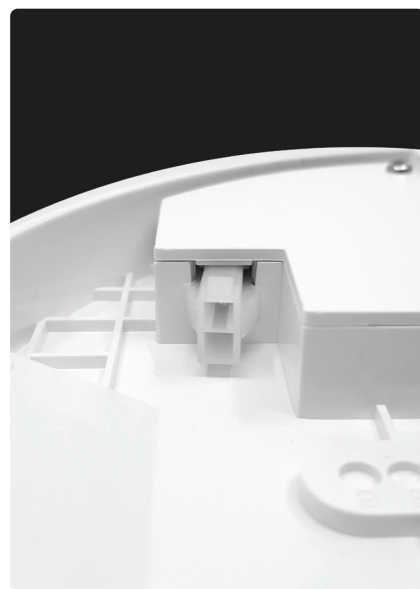

Integrated Drivers

All of the Luxe fittings feature 240V integrated drivers, allowing for straight forward installation.




Polycarbonate Housing

Constructed with the best quality materials for the extended durability.



New Switchable Wattage and Easy Installation System

With the ability to now switch between wattages, and a much easier installation process, the Luxe Circle and Luxe Long are superior in efficiency.

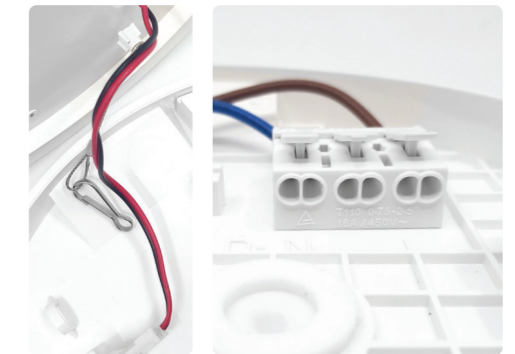

Quick Connection Clip and Wiring

With a hook to attach both ends while wiring and a simple clip connection, the Luxe Circle makes wiring trouble-free.



Quick Release

The Luxe Circle features two quick release push-in buttons on each side, making it easy to release when needed.



Multiple Cable Entry Points

To allow for an easier installation process



The Lucid T Series
Scan The QR Code to learn
more about the Lucid T series.

Lucid T

The Lucid T series incorporates powerful illumination with advanced LED technology. Its modern and minimal design allows it to fit into any residential or commercial space.

Lucid T 270



| LED | LUMENS (3000K & 4000K) |
|-----|------------------------|
|-----|------------------------|

| | |
|-----|------|
| 10W | 1000 |
|-----|------|

| | |
|-----|------|
| 18W | 1800 |
|-----|------|

| | |
|-----|------|
| 24W | 2400 |
|-----|------|

| | |
|----------|----------------|
| EFFICACY | Up To 100 Lm/W |
|----------|----------------|

| DIMENSIONS | |
|------------|--|
|------------|--|

| | |
|--------|----------|
| H 52mm | W Ø270mm |
|--------|----------|

Lucid T 350



| LED | LUMENS (3000K & 4000K) |
|-----|------------------------|
|-----|------------------------|

| | |
|-----|------|
| 18W | 1800 |
|-----|------|

| | |
|-----|------|
| 24W | 2400 |
|-----|------|

| | |
|-----|------|
| 32W | 3200 |
|-----|------|

| | |
|----------|----------------|
| EFFICACY | Up To 100 Lm/W |
|----------|----------------|

| DIMENSIONS | |
|------------|--|
|------------|--|

| | |
|--------|----------|
| H 52mm | W Ø350mm |
|--------|----------|

| BEAM ANGLE |
|------------|
|------------|

| |
|------|
| 110° |
|------|

| FINISHES |
|----------|
|----------|

| |
|---------------------|
| White Polycarbonate |
|---------------------|

| |
|---------------------|
| Black Polycarbonate |
|---------------------|

| FEATURES |
|----------|
|----------|

| |
|---------|
| CRI 90+ |
|---------|

| |
|-------|
| IP 54 |
|-------|

| |
|--------------|
| Flicker Free |
|--------------|

| |
|----------|
| Dimmable |
|----------|

| |
|------|
| IK10 |
|------|

Lucid T is Interchangeable Between Wattages

The Lucid T 270 and Lucid T 350 have been designed with versatility in mind; it's ability to swap between wattages with the flick of a switch allows for light manipulation on site.



Direct & Indirect Lighting

The Lucid T comes with an indirect lighting switch, giving you the power to choose if you want to utilise it or not.

UV Resistant, Polycarbonate Housing

The Lucid T series is constructed with the highest quality polycarbonate for an unmatched level of durability. As a result of this construction, these luminaires are UV resistant and will not rust.

This also gives the Lucid T series an IK rating of 10, ensuring protection against external impact.



IP 54

With an IP rating of 54, the Lucid T series can be used indoors, and outdoors.



Integrated Dimmable Drivers

Featuring integrated dimmable drivers, which allow for easy installation and smooth dimming.



Minimal Design Aesthetic

The Lucid T fittings incorporate a negative detail to enhance a minimal design aesthetic.



Black Finish

The Lucid T 270 and Lucid T 350 are now both available in a black polycarbonate finish.



Easy Installation System

The Lucid T has been designed with effortless installation in mind, its quick release system ensures a simple and fast application process.



Quick Connection Clip and Wiring

With a hook to attach both ends during installation and the wiring itself being a simple clip connection, the Lucid T makes the application process simple.



Quick Release

The Lucid T features two quick release push-in buttons on either side, making it quick and easy to release.



Multiple Cable Entry Points

Provided for an easier and faster installation.

Specifications



Quick Selection Guide

| C | |
|--------------------|----|
| CORE | 36 |
| CORE XS | 36 |
| CORE 70 ADJUSTABLE | 37 |
| CORE 95 ADJUSTABLE | 37 |
| K | |
| KANI | 44 |
| L | |
| LUCID T 270 | 43 |
| LUCID T 350 | 43 |
| LUXE CIRCLE | 42 |
| LUXE LONG | 42 |
| S | |
| SILO 40 SURFACE | 40 |
| SILO 60 SURFACE | 41 |
| SPLIT | 38 |
| T | |
| TWIST | 38 |
| V | |
| VITA ADJUSTABLE | 39 |
| VITA FIXED | 39 |

Symbol Key

| | | | |
|---|---|---|--|
|  | IC RATING A measurement used to determine if a recessed downlight is suitable to come into contact with your building insulation or not. IC-4 means that the light can be covered by insulation. |  | LIFETIME Defined as the time it takes (in hours) until the light output of the LED reaches 70% of the initial output. |
|  | CLASS 1 A luminaire in which protection against electric shock does not rely on basic insulation only, but which includes an additional safety precaution in such a way that means are provided for the connection of accessible conductive parts to the protective (earthing) conductor of the fixed wiring of the installation in such a way that accessible conductive parts cannot become live in the event of a failure of the basic insulation. |  | ADJUSTABLE TILT The maximum angle that the head of the product can be adjusted. |
|  | CLASS 2 A luminaire in which protection against electric shock does not rely on basic insulation only, but in which additional safety precautions such as double insulation or reinforced insulation are provided, there being no provision for protective earthing or reliance upon installation conditions. |  | ADJUSTABLE ROTATION The distance around which the product can rotate. |
|  | CLASS 3 A luminaire in which protection against electric shock relies on supply at safety extra-low voltage (SELV) and in which voltages higher than those of SELV are not generated. |  | WARRANTY The number inside represents how many years the warranty is valid for. |
|  | REGULATORY COMPLIANCE MARK (RCM) This is a compliance requirement in Australia and New Zealand, it shows that a product is safe to supply to the Australian market. This marking indicates compliance with electrical safety, EMC, EME & telecommunications requirements, as applicable to each product. |  | FLICKER FREE The driver is flicker free. |
|  | DIMMABLE The product is dimmable |  | INGRESS PROTECTION (IP) RATING This classifies the degrees of protection a fixture provides against the intrusion of foreign bodies like dust or water. The first digit represents the level of protection against solids and the second is the level of protection against liquids. |
|  | BEAM ANGLE The angle at which the light is distributed or emitted. |  | COLOUR RENDERING INDEX (CRI) A scale from 1 to 100, indicating how effective the lamp is at rendering colour. The higher the CRI, the better the colour rendering ability. |
|  | IMPACT PROTECTION (IK RATING) IK Rating or 'Impact Protection' indicates the level of resistance an electrical enclosure provides against mechanical impact. It is a 1 to 10 system with a higher number indicating better ability to maintain safety at higher energy impacts. |  | UNIFIED GLARE RATING (UGR) UGR is a numerical calculation of how much glare is produced by a luminaire once in operation. |
|  | BLUETOOTH COMPATIBLE Compatible with Casambi Bluetooth devices. |  | LED The light source of this product is LED. |
| | |  | STANDARD DEVIATION COLOUR MATCHING This classifies the degrees of protection a fixture provides against the intrusion of foreign bodies like dust or water. The first digit represents the level of protection against solids and the second is the level of protection against liquids. |
| | |  | 24 VOLT DC 24 Volt Direct Current power supply. |

CORE **G3**



DIMENSIONS **W** Ø95mm **H** 150mm

LUMINAIRE OPTIONS

BEAM OPTIONS

60° **STANDARD** 36° 24° 15°

GENERAL SPECIFICATIONS

| | |
|------------------|--|
| LED | LUMENS (3000K 4000K) |
| 18W | 1800 lm 1900 lm |
| EFFICACY | Up to 105 Lm/W |
| COLOUR | 3000K, Warm White 4000K, Cool White |
| MATERIAL | Powder Coated Material |
| FINISH | White Black |
| CRI | 92+ |
| IP | 20 |
| COLOUR DEVIATION | SDCM ≤2 |
| UGR | <17 |
| LIFETIME | > 55,000hrs L80B10 |
| WARRANTY | 5 Years |

DRIVER SPECIFICATIONS






| | |
|--------------|--|
| POWER | 300mA 240V Built-In Flicker Free Driver |
| DIMMING | Phase Cut Dimming / DALI |
| POWER FACTOR | > 0.95 |






PRODUCT CODES

| | |
|---------------------|------------------------|
| White, 3000K | 118-COR318W603 |
| White, 4000K | 118-COR318W604 |
| Black, 3000K | 118-COR318B603 |
| Black, 4000K | 118-COR318B604 |
| White, 3000K, DALI | 118-COR318W603D |
| White, 4000K , DALI | 118-COR318W604D |
| Black, 3000K, DALI | 118-COR318B603D |
| Black, 4000K, DALI | 118-COR318B604D |



ACCESSORIES

| | |
|------------------------------|---------------------|
| 36° Reflector | 118-RFLC9536 |
| 24° Reflector | 118-RFLC9524 |
| 15° Reflector | 118-RFLC9515 |
| White Baffle | 118-COR95BW |
| Gold Baffle | 118-COR95BG |
| Black Baffle | 118-COR95BB |
| Honeycomb Lens, White Baffle | 118-COR95HW |
| Honeycomb Lens, Gold Baffle | 118-COR95HG |
| Honeycomb Lens, Black Baffle | 118-COR95HB |





CORE XS



DIMENSIONS **W** Ø95mm **H** 105mm

LUMINAIRE OPTIONS

BEAM OPTIONS

60° **STANDARD** 40° 20°

GENERAL SPECIFICATIONS

| | |
|------------------|--|
| LED | LUMENS (3000K 4000K) |
| 11W | 1200 lm 1300 lm |
| EFFICACY | Up to 118 Lm/W |
| COLOUR | 3000K, Warm White 4000K, Cool White |
| MATERIAL | Powder Coated Aluminium |
| FINISH | White Black |
| CRI | 92+ |
| IP | 20 |
| COLOUR DEVIATION | SDCM ≤2 |
| UGR | <18 |
| LIFETIME | > 55,000hrs L80B10 |
| WARRANTY | 5 Years |

DRIVER SPECIFICATIONS












| | |
|--------------|-------------------------------|
| POWER | 300mA 240V Built-In Driver |
| DIMMING | Phase-Cut |
| POWER FACTOR | > 0.95 |








PRODUCT CODES

| | |
|-------------------|------------------------|
| White, 3000K, 60° | 118-CORXS11W603 |
| White, 4000K, 60° | 118-CORXS11W604 |
| Black, 3000K, 60° | 118-CORXS11B603 |
| Black, 4000K, 60° | 118-CORXS11B604 |



ACCESSORIES

| | |
|----------|-------------------|
| 40° Lens | 118-LSCX40 |
| 20° Lens | 118-LSCX20 |





CORE 70 ADJUSTABLE



DIMENSIONS **W** Ø70mm **H1** 125mm **H2** 30mm

LUMINAIRE OPTIONS

BEAM OPTIONS

60° **STANDARD** 36° 24° 15°

GENERAL SPECIFICATIONS

| | |
|------------------|--|
| LED | LUMENS (3000K 4000K) |
| 15W | 1300 lm 1420 lm |
| EFFICACY | Up to 94 Lm/W |
| COLOUR | 3000K, Warm White 4000K, Cool White |
| MATERIAL | Powder Coated Material |
| FINISH | White Black |
| CRI | 92+ |
| IP | 20 |
| COLOUR DEVIATION | SDCM ≤2 |
| UGR | <17 |
| LIFETIME | > 55,000hrs L80B10 |
| WARRANTY | 5 Years |

DRIVER SPECIFICATIONS

| | |
|--------------|-------------------------------|
| POWER | 350mA 240V Built-In Driver |
| DIMMING | Phase Cut Dimming |
| POWER FACTOR | > 0.95 |

















REMOTE DALI DIMMING AVAILABLE UPON REQUEST









PRODUCT CODES

| | |
|-------------------|-----------------------|
| White, 3000K, 60° | 118-COAS15W603 |
| White, 4000K, 60° | 118-COAS15W604 |
| Black, 3000K, 60° | 118-COAS15B603 |
| Black, 4000K, 60° | 118-COAS15B604 |



ACCESSORIES

| | |
|------------------------------|---------------------|
| 15° Reflector | 118-RFLC7015 |
| 24° Reflector | 118-RFLC7024 |
| 36° Reflector | 118-RFLC7036 |
| Black Baffle | 118-COR70BB |
| White Baffle | 118-COR70BW |
| Gold Baffle | 118-COR70BG |
| Honeycomb Lens, Black Baffle | 118-COR70HB |
| Honeycomb Lens, White Baffle | 118-COR70HW |
| Honeycomb Lens, Gold Baffle | 118-COR70HG |





CORE 95 ADJUSTABLE



DIMENSIONS **W** Ø95mm **H1** 150mm **H2** 30mm

LUMINAIRE OPTIONS

BEAM OPTIONS

60° **STANDARD** 36° 24° 15°

GENERAL SPECIFICATIONS

| | |
|------------------|--|
| LED | LUMENS (3000K 4000K) |
| 20W | 1850 lm 1920 lm |
| EFFICACY | Up to 96 Lm/W |
| COLOUR | 3000K, Warm White 4000K, Cool White |
| MATERIAL | Powder Coated Material |
| FINISH | White Black |
| CRI | 92+ |
| IP | 20 |
| COLOUR DEVIATION | SDCM ≤2 |
| UGR | <17 |
| LIFETIME | > 55,000hrs L80B10 |
| WARRANTY | 5 Years |

DRIVER SPECIFICATIONS

| | |
|--------------|-------------------------------|
| POWER | 500mA 240V Built-In Driver |
| DIMMING | Phase Cut Dimming |
| POWER FACTOR | > 0.95 |

















REMOTE DALI DIMMING AVAILABLE UPON REQUEST









PRODUCT CODES

| | |
|-------------------|-----------------------|
| White, 3000K, 60° | 118-COAM20W603 |
| White, 4000K, 60° | 118-COAM20W604 |
| Black, 3000K, 60° | 118-COAM20B603 |
| Black, 4000K, 60° | 118-COAM20B604 |


ACCESSORIES

| | |
|------------------------------|---------------------|
| 15° Reflector | 118-RFLC9515 |
| 24° Reflector | 118-RFLC9524 |
| 36° Reflector | 118-RFLC9536 |
| Black Baffle | 118-COR95BB |
| White Baffle | 118-COR95BW |
| Gold Baffle | 118-COR95BG |
| Honeycomb Lens, Black Baffle | 118-COR95HB |
| Honeycomb Lens, White Baffle | 118-COR95HW |
| Honeycomb Lens, Gold Baffle | 118-COR95HG |





TWIST

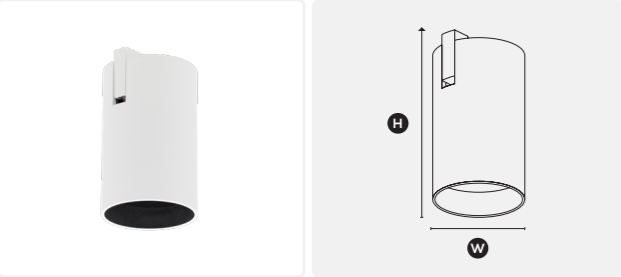

DIMENSIONS **W** Ø73mm

With Ceiling Mounting Kit **H** 150mm

With Recessed Mounting Kit **H** 130mm

LUMINAIRE OPTIONS

BEAM OPTIONS

50° **STANDARD** 36° 25° 15°

GENERAL SPECIFICATIONS

LED **LUMENS** (3000K | 4000K)

13W 1400 lm | 1500 lm

EFFICACY Up to 115 Lm/W

COLOUR 3000K, Warm White
4000K, Cool White

MATERIAL Powder Coated Aluminium

FINISH White | Black

CRI 90+

IP 20

COLOUR DEVIATION SDCM ≤3

UGR <18

LIFETIME > 55,000hrs L80B10

WARRANTY 5 Years

DRIVER SPECIFICATIONS

POWER 350mA 240V
Built-In Driver

DIMMING Phase Cut Dimming

POWER FACTOR > 0.95

PRODUCT CODES

White, 3000K, 60° **7-TWIS13W503**

White, 4000K, 60° **7-TWIS13W504**

Black, 3000K, 60° **7-TWIS13B50**

Black, 4000K, 60° **7-TWIS13B503**

ACCESSORIES

Ceiling Mount Kit, White **7-TWISCMKW**

Ceiling Mount Kit, Black **7-TWISCMKB**

Recessed Mount Kit, White **7-TWISRMKW**

Recessed Mount Kit, Black **7-TWISRMKB**

36° Lens **7-TWISLNS36**

25° Lens **7-TWISLNS25**

15° Lens **7-TWISLNS15**

Honeycomb **7-TWISH**

Gold Baffle **7-TWISGB**

White Baffle **7-TWISWB**



SPLIT



DIMENSIONS **W** Ø65mm **H** 200mm

LUMINAIRE OPTIONS

BEAM OPTIONS

50° **STANDARD** 36° 25°

GENERAL SPECIFICATIONS

LED **LUMENS** (3000K | 4000K)

12W 1085 lm | 1195 lm

EFFICACY Up to 99 Lm/W

COLOUR 3000K, Warm White
4000K, Cool White

MATERIAL Powder Coated Material

FINISH White | Black

CRI 90+

IP 20

COLOUR DEVIATION SDCM ≤3

UGR <19

LIFETIME > 55,000hrs L80B10

WARRANTY 5 Years

DRIVER SPECIFICATIONS

POWER 350mA 240V
Built-In Driver

DIMMING Phase Cut Dimming

POWER FACTOR > 0.90

Remote DALI Dimming Available Upon Request

PRODUCT CODES

White, 3000K, 50° **83-SP12W503**

White, 4000K, 50° **83-SP12W504**

Black, 3000K, 50° **83-SP12B503**

Black, 4000K, 50° **83-SP12B504**

ACCESSORIES

24° Reflector **83-RFL25**

36° Reflector **83-RFL36**

Honeycomb Lens **83-AIRH**

Black Baffle **83-SPLITRB**

White Baffle **83-SPLITRW**

Gold Baffle **83-SPLITRG**



VITA FIXED



DIMENSIONS **H1** 47mm **W** Ø120mm

NEGATIVE DETAIL FROM SURFACE **H2** 6mm

LUMINAIRE OPTIONS

BEAM OPTIONS

50° **STANDARD** 36° 25°

GENERAL SPECIFICATIONS

LED **LUMENS** (3000K | 4000K)

12W 1140 lm | 1180 lm

EFFICACY Up to 98 Lm/W

COLOUR 3000K, Warm White
4000K, Cool White

MATERIAL Powder Coated Aluminium

FINISH White | Black

CRI 90+

IP 20

COLOUR DEVIATION SDCM ≤3

UGR <19

LIFETIME > 55,000hrs L80B10

WARRANTY 5 Years

POWER SPECIFICATIONS

POWER 240V COB LED
(No Driver)

DIMMING Phase Cut Dimming

PRODUCT CODES

White, 3000K, 50° **83-VITAF12W503**

White, 4000K, 50° **83-VITAF12W504**

Black, 3000K, 50° **83-VITAF12B503**

Black, 4000K, 50° **83-VITAF12B504**

ACCESSORIES

White Fascia **83-VITAWHITE**

Gold Fascia **83-VITAGOLD**

Black Fascia **83-VITABLACK**

25° Reflector **83-RFL25**

36° Reflector **83-RFL36**



VITA ADJUSTABLE



DIMENSIONS **H1** 66mm **W1** Ø120mm

CANOPY DIMENSIONS **H2** 25mm **W2** Ø76mm

LUMINAIRE OPTIONS

BEAM OPTIONS

50° **STANDARD** 36° 25°

GENERAL SPECIFICATIONS

LED **LUMENS** (3000K | 4000K)

12W 1140 lm | 1180 lm

EFFICACY Up to 98 Lm/W

COLOUR 3000K, Warm White
4000K, Cool White

MATERIAL Powder Coated Aluminium

FINISH White | Black

CRI 90+

IP 20

COLOUR DEVIATION SDCM ≤3

UGR <19

LIFETIME > 55,000hrs L80B10

WARRANTY 5 Years

POWER SPECIFICATIONS

POWER 240V COB LED
(No Driver)

DIMMING Phase Cut Dimming

PRODUCT CODES

White, 3000K, 50° **83-VITAA12W503**

White, 4000K, 50° **83-VITAA12W504**

Black, 3000K, 50° **83-VITAA12B503**

Black, 4000K, 50° **83-VITAA12B504**

ACCESSORIES

White Fascia **83-VITAWHITE**

Gold Fascia **83-VITAGOLD**


Black Fascia **83-VITABLACK**

25° Reflector **83-RFL25**

36° Reflector **83-RFL36**



SILO 40 SURFACE

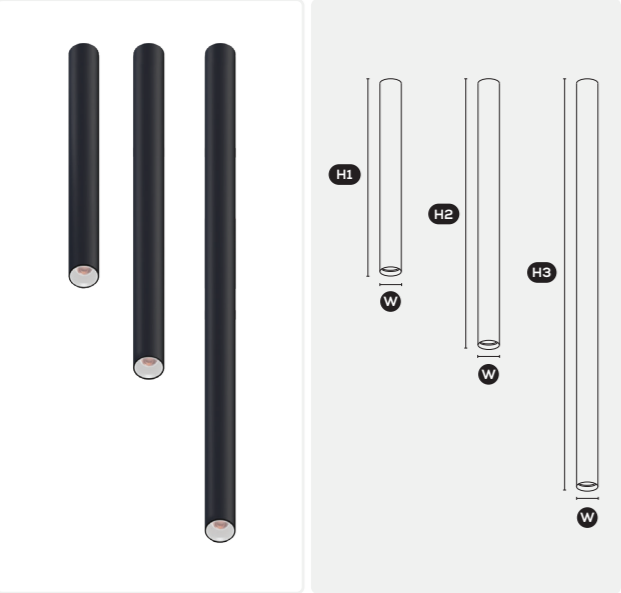

DIMENSIONS
W Ø40mm H1 280mm H2 380mm H3 580mm

LUMINAIRE OPTIONS

BEAM OPTIONS

60° STANDARD 36° 24° 15°

GENERAL SPECIFICATIONS

| | |
|------------------|--|
| LED | LUMENS (3000K 4000K) |
| 6W | 520 lm 520 lm |
| EFFICACY | Up to 87 Lm/W |
| COLOUR | 3000K, Warm White 4000K, Cool White |
| MATERIAL | Powder Coated Aluminium |
| FINISH | White Black |
| CRI | 92+ |
| IP | 20 |
| COLOUR DEVIATION | SDCM ≤2 |
| UGR | <15 |
| LIFETIME | > 55,000hrs L80B10 |
| WARRANTY | 5 Years |

DRIVER SPECIFICATIONS

POWER 150mA 240V
Built-In Flicker Free
Dimmable Driver

DIMMING Phase Cut Dimming

POWER FACTOR > 0.90

REMOTE DALI DIMMING AVAILABLE UPON REQUEST

PRODUCT CODES


| | |
|------------------------|------------------|
| 280, White, 3000K, 60° | 118-SIS42806W603 |
| 280, White, 4000K, 60° | 118-SIS42806W604 |
| 280, Black, 3000K, 60° | 118-SIS42806B603 |
| 280, Black, 4000K, 60° | 118-SIS42806B604 |
| 380, White, 3000K, 60° | 118-SIS43806W603 |
| 380, White, 4000K, 60° | 118-SIS43806W604 |
| 380, Black, 3000K, 60° | 118-SIS43806B603 |
| 380, Black, 4000K, 60° | 118-SIS43806B604 |
| 580, White, 3000K, 60° | 118-SIS45806W603 |
| 580, White, 4000K, 60° | 118-SIS45806W604 |
| 580, Black, 3000K, 60° | 118-SIS45806B603 |
| 580, Black, 4000K, 60° | 118-SIS45806B604 |

ACCESSORIES

| | |
|---------------|-------------|
| 15° Reflector | 118-SIL4015 |
| 24° Reflector | 118-SIL4024 |
| 36° Reflector | 118-SIL4036 |
| Black Baffle | 118-SIL40BB |
| Gold Baffle | 118-SIL40BG |
| White Baffle | 118-SIL40BW |



SILO 60 SURFACE

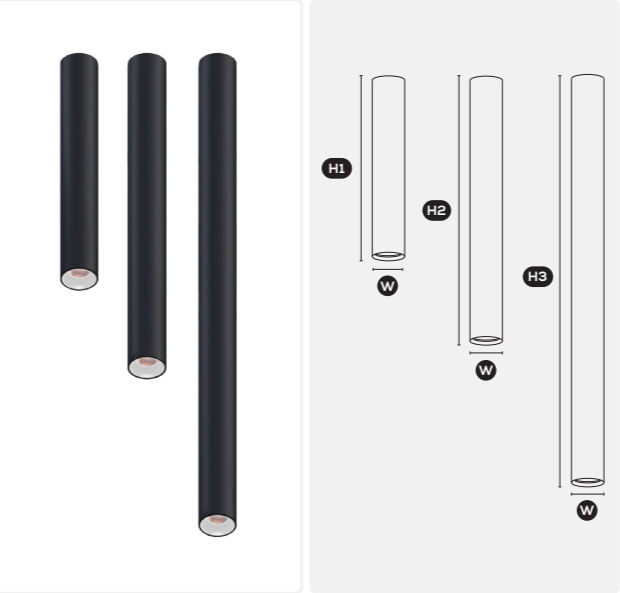

DIMENSIONS
W Ø60mm H1 280mm H2 380mm H3 580mm

LUMINAIRE OPTIONS

BEAM OPTIONS

60° STANDARD 36° 24° 15°

GENERAL SPECIFICATIONS

| | |
|------------------|--|
| LED | LUMENS (3000K 4000K) |
| 12W | 1080 lm 1080 lm |
| EFFICACY | Up to 90 Lm/W |
| COLOUR | 3000K, Warm White 4000K, Cool White |
| MATERIAL | Powder Coated Aluminium |
| FINISH | White Black |
| CRI | 92+ |
| IP | 20 |
| COLOUR DEVIATION | SDCM ≤2 |
| UGR | <15 |
| LIFETIME | > 55,000hrs L80B10 |
| WARRANTY | 5 Years |

DRIVER SPECIFICATIONS

POWER 300mA 240V
Built-In Flicker Free
Dimmable Driver

DIMMING Phase Cut Dimming

POWER FACTOR > 0.90

REMOTE DALI DIMMING AVAILABLE UPON REQUEST

PRODUCT CODES

| | |
|------------------------|------------------|
| 280, White, 3000K, 60° | 118-SIS62812W603 |
| 280, White, 4000K, 60° | 118-SIS62812W604 |
| 280, Black, 3000K, 60° | 118-SIS62812B603 |
| 280, Black, 4000K, 60° | 118-SIS62812B604 |
| 380, White, 3000K, 60° | 118-SIS63812W603 |
| 380, White, 4000K, 60° | 118-SIS63812W604 |
| 380, Black, 3000K, 60° | 118-SIS63812B603 |
| 380, Black, 4000K, 60° | 118-SIS63812B604 |
| 580, White, 3000K, 60° | 118-SIS65812W603 |
| 580, White, 4000K, 60° | 118-SIS65812W604 |
| 580, Black, 3000K, 60° | 118-SIS65812B603 |
| 580, Black, 4000K, 60° | 118-SIS65812B604 |

ACCESSORIES

| | |
|---------------|-------------|
| 15° Reflector | 118-SIL6015 |
| 24° Reflector | 118-SIL6024 |
| 36° Reflector | 118-SIL6036 |
| Black Baffle | 118-SIL60BB |
| Gold Baffle | 118-SIL60BG |
| White Baffle | 118-SIL60BW |



LUXE CIRCLE



| | | | |
|---|------------|---------|-----------|
| 1 | DIMENSIONS | H1 53mm | W1 Ø220mm |
| 2 | DIMENSIONS | H2 49mm | W2 Ø270mm |
| 3 | DIMENSIONS | H3 63mm | W3 Ø400mm |

GENERAL SPECIFICATIONS

| | |
|------------------|--|
| LED | LUMENS (3000K 4000K) |
| 1 10W / 15W | 1000lm 1500lm |
| 2 18W / 24W | 1800 lm 2400lm |
| 3 29W / 38W | 2900 lm 3800 lm |
| EFFICACY | 100 lm/W |
| COLOUR | 3000K, Warm White 4000K, Cool White |
| MATERIAL | Polycarbonate |
| FINISH | White |
| BEAM | 110° |
| CRI | 90+ |
| IP | 54 (220 & 270) 20 (400) |
| IK | 10 |
| COLOUR DEVIATION | SDCM ≤3 |
| UGR | <26 |
| LIFETIME | > 30,000hrs L70B10 |
| WARRANTY | 3 Years |

DRIVER SPECIFICATIONS

| | |
|--------------|---|
| POWER | 240V Built-In Flicker Free Dimmable Driver |
| DIMMING | Phase Cut Dimming |
| POWER FACTOR | > 0.95 |




REMOTE DALI DIMMING AVAILABLE UPON REQUEST

PRODUCT CODES

| | |
|------------------|--------------|
| 1 10W/15W, 3000K | 83-LXC2215W3 |
| 1 10W/15W, 4000K | 83-LXC2215W4 |
| 2 18W/24W, 3000K | 83-LXC2724W3 |
| 2 18W/24W, 4000K | 83-LXC2724W4 |
| 3 29W/38W, 3000K | 83-LXC4038W3 |
| 3 29W/38W, 4000K | 83-LXC4038W4 |



LUXE LONG

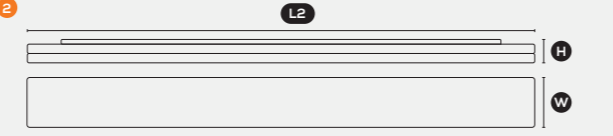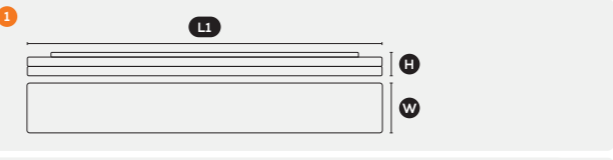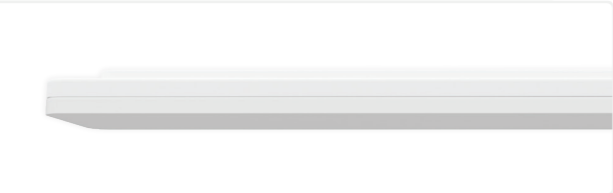

| | | | | |
|---|------------|--------|---------|-----------|
| 1 | DIMENSIONS | H 55mm | W 130mm | L1 900mm |
| 2 | DIMENSIONS | H 55mm | W 130mm | L2 1200mm |

GENERAL SPECIFICATIONS

| | |
|------------------|--|
| LED | LUMENS (3000K 4000K) |
| 1 24W / 32W | 2400lm 3200lm |
| 2 29W / 38W | 2900 lm 3800 lm |
| EFFICACY | 100 lm/W |
| COLOUR | 3000K, Warm White 4000K, Cool White |
| MATERIAL | Polycarbonate |
| FINISH | White |
| BEAM | 110° |
| CRI | 90+ |
| IP | 54 |
| IK | 10 |
| COLOUR DEVIATION | SDCM ≤3 |
| UGR | <30 |
| LIFETIME | > 30,000hrs L70B10 |
| WARRANTY | 3 Years |

DRIVER SPECIFICATIONS

| | |
|--------------|---|
| POWER | 240V Built-In Flicker Free Dimmable Driver |
| DIMMING | Non-Dimming |
| POWER FACTOR | > 0.95 |

REMOTE DALI DIMMING AVAILABLE UPON REQUEST

PRODUCT CODES

| | |
|------------------|-----------------|
| 1 24W/32W, 3000K | 83-LXL903224W3 |
| 1 24W/32W, 3000K | 83-LXL903224W4 |
| 2 29W/38W, 3000K | 83-LXL1203829W3 |
| 2 29W/38W, 4000K | 83-LXL1203829W4 |



LUCID T 270



| | | |
|------------|--------|----------|
| DIMENSIONS | H 52mm | W Ø270mm |
|------------|--------|----------|

GENERAL SPECIFICATIONS

| | |
|------------------|--|
| LED (SWITCHABLE) | LUMENS (3000K 4000K) |
| 10W | 1000lm |
| 18W | 1800lm |
| 24W | 2400lm |
| EFFICACY | 100 lm/W |
| COLOUR | 3000K, Warm White 4000K, Cool White |
| MATERIAL | PMMA Polycarbonate |
| FINISH | White Black |
| BEAM | 110° |
| CRI | 90+ |
| IP | 54 |
| IK | 10 |
| COLOUR DEVIATION | SDCM ≤3 |
| UGR | <26 |
| LIFETIME | > 30,000hrs L70B10 |
| WARRANTY | 3 Years |

DRIVER SPECIFICATIONS

| | |
|--------------|---|
| POWER | 240V Built-In Flicker Free Dimmable Driver |
| DIMMING | Phase Cut Dimming |
| POWER FACTOR | > 0.95 |

REMOTE DALI DIMMING AVAILABLE UPON REQUEST

PRODUCT CODES

| | |
|--------------|---------------|
| 3000K, White | 83-LCDT2724W3 |
| 4000K, White | 83-LCDT2724W4 |
| 3000K, Black | 83-LCDT2724B3 |
| 4000K, Black | 83-LCDT2724B4 |



LUCID T 350



| | | |
|------------|--------|----------|
| DIMENSIONS | H 52mm | W Ø350mm |
|------------|--------|----------|

GENERAL SPECIFICATIONS

| | |
|------------------|--|
| LED (SWITCHABLE) | LUMENS (3000K 4000K) |
| 18W | 1800lm |
| 24W | 2400lm |
| 32W | 3200lm |
| EFFICACY | 100 lm/W |
| COLOUR | 3000K, Warm White 4000K, Cool White |
| MATERIAL | PMMA Polycarbonate |
| FINISH | White Black |
| BEAM | 110° |
| CRI | 90+ |
| IP | 54 |
| IK | 10 |
| COLOUR DEVIATION | SDCM ≤3 |
| UGR | <26 |
| LIFETIME | > 30,000hrs L70B10 |
| WARRANTY | 3 Years |

DRIVER SPECIFICATIONS

| | |
|--------------|---|
| POWER | 240V Built-In Flicker Free Dimmable Driver |
| DIMMING | Phase Cut Dimming |
| POWER FACTOR | > 0.95 |

REMOTE DALI DIMMING AVAILABLE UPON REQUEST

PRODUCT CODES

| | |
|--------------|---------------|
| 3000K, White | 83-LCDT3529W3 |
| 4000K, White | 83-LCDT3529W4 |
| 3000K, Black | 83-LCDT3529B3 |
| 4000K, Black | 83-LCDT3529B4 |



KANI



| | | | | |
|------------|----|--------|----|--------|
| DIMENSIONS | W1 | Ø110mm | W2 | Ø130mm |
| | H | 57mm | | |

GENERAL SPECIFICATIONS

| | |
|------------------|--|
| LED | LUMENS (3000K 4000K) |
| 12W | 1050 lm 1230 lm |
| EFFICACY | Up to 102 Lm/W |
| COLOUR | 3000K, Warm White 4000K, Cool White |
| MATERIAL | Powder Coated Aluminium Glass |
| FINISH | White Black |
| BEAM | 75° |
| CRI | 92+ |
| IP | 20 |
| COLOUR DEVIATION | SDCM ≤3 |
| UGR | <21 |
| LIFETIME | > 55,000hrs L80B10 |
| WARRANTY | 3 Years |

POWER SPECIFICATIONS

| | |
|---------|-----------------------------|
| POWER | 240V COB LED (No Driver) |
| DIMMING | Phase Cut Dimming |

PRODUCT CODES

| | |
|-------------------|---------------|
| White, 3000K, 75° | 118-KAN15W753 |
| White, 4000K, 75° | 118-KAN15W754 |
| Black, 3000K, 75° | 118-KAN15B753 |
| Black, 4000K, 75° | 118-KAN15B754 |

ACCESSORIES

| | |
|--------------|-----------|
| White Fascia | 118-KANRW |
| Gold Fascia | 118-KANRG |
| Black Fascia | 118-KANRB |





View the rest of the **2025** Collection on our website

Discover what's new, rediscover your love for our classics, and find out how our latest collection of luminaires goes above and beyond anything we've done before.

fazelight.com



2025 SURFACE MOUNTED COLLECTION

Perth, Australia

10 Gibberd Road,
Balcatta WA 6021
+61 89240 2227
sales@fazelight.com
fazelight.com

Edition APR.25

© Copyright 2025 Radiant
Lighting Pty Ltd. All rights
reserved.

Please note specifications
are subject to change.

Please refer to our website
for current specifications.



**Proudly Designed and
Printed In Australia.**

