


EDGE X

The EDGE X packs a powerful punch! Providing intense illumination with very little energy.

- Precision reflector with clear lens – For better light distribution.
- Specially designed low-height heat sink – For cramped ceiling spaces.
- Deep set lamp position – For visual comfort and glare reduction.
- Side facing cable output – For spaces that require a tighter fit.

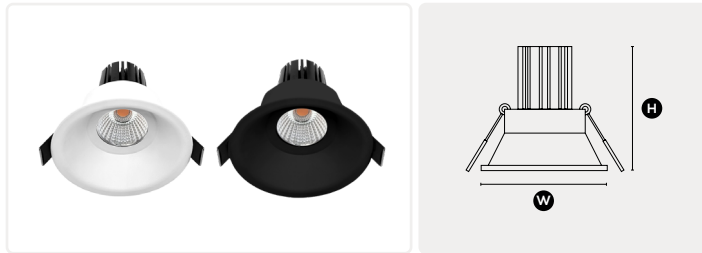

DIMENSIONS Ø103 mm 98 mm

CUT-OUT Ø92mm

LUMINAIRE OPTIONS

LED & LUMENS OPTIONS (3000K | 4000K)

11W 1065lm | 1070lm

8W 920lm | 920lm

6W 740lm | 745lm

BEAM OPTIONS

60°

36°

24°

15°

FINISHES

☐ WHITE

☒ BLACK

GENERAL SPECIFICATIONS

EFFICACY Up to 124 Lm/W

COLOUR 3000K, Warm White
4000K, Cool White

MATERIAL Powder Coated Material

CRI 92+

IP 44

COLOUR DEVIATION SDCM ≤2

UGR <13

LIFETIME > 55,000hrs L80B10

WARRANTY 5 Years

DRIVER SPECIFICATIONS

DIMENSIONS L 98 x W 40 x H 22 mm

POWER 300mA | 240mA | 180mA
240V Remote Flicker Free
Dimmable Driver

DIMMING Phase Cut Dimming

POWER FACTOR > 0.90

DALI DIMMING AVAILABLE UPON REQUEST

PROJECT DETAILS

PROJECT

TYPE

NOTES

PRODUCT CODES

White, 3000K, 60°

118-ED2X13W603

White, 4000K, 60°

118-ED2X13W604

Black, 3000K, 60°

118-ED2X13B603

Black, 4000K, 60°

118-ED2X13B604

ACCESSORIES

36° Reflector

118-RFLX36

24° Reflector

118-RFLX24

15° Reflector

118-RFLX15

