


EDGE XM

The EDGE XM packs a powerful punch! Providing intense illumination with very little energy. Featuring a low-height heatsink.

- Precision reflector with clear lens – For better light distribution.
- Specially designed low-height heat sink – For cramped ceiling spaces.
- Deep set lamp position – For visual comfort and glare reduction.
- Side facing cable output – For spaces that require a tighter fit.

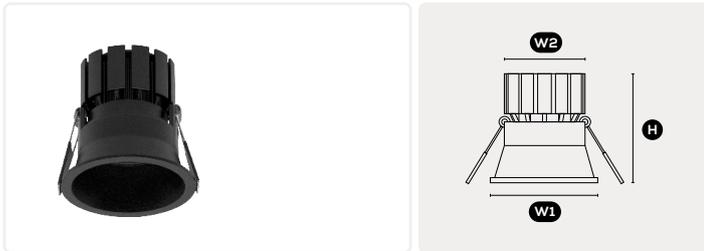

DIMENSIONS **W1** Ø86 mm **W2** Ø62 mm **H** 78 mm
CUT-OUT **i** Ø76mm

LUMINAIRE OPTIONS

LED & LUMENS OPTIONS (3000K | 4000K)

11W **STANDARD** 1065lm | 1070lm
8W 920lm | 920lm
6W 740lm | 745lm

BEAM OPTIONS

60° **STANDARD** **36°** **24°** **15°**

FINISHES

WHITE **BLACK**

GENERAL SPECIFICATIONS

EFFICACY Up to 124 Lm/W

COLOUR 3000K, Warm White
4000K, Cool White

MATERIAL Powder Coated Material

CRI 92+

IP 44

COLOUR DEVIATION SDCM ≤2

UGR <13

LIFETIME > 55,000hrs L90B10

WARRANTY 5 Years

DRIVER SPECIFICATIONS

DIMENSIONS L 98 x W 40 x H 22 mm

POWER 300mA | 240mA | 180mA
240V Remote Flicker Free Dimmable Driver

DIMMING Phase Cut Dimming

POWER FACTOR > 0.90

DALI DIMMING AVAILABLE UPON REQUEST

PROJECT DETAILS

PROJECT

TYPE

NOTES

PRODUCT CODES

White, 3000K, 60° **118-ED3XM13W603**
 White, 4000K, 60° **118-ED3XM13W604**
 Black, 3000K, 60° **118-ED3XM13B603**
 Black, 4000K, 60° **118-ED3XM13B604**

ACCESSORIES

36° Reflector **118-RFLX36**
 24° Reflector **118-RFLX24**
 15° Reflector **118-RFLX15**

