


## FLOW PLUS SIDE STRAIGHT ENTRY

Flow Plus LED strip is the best of its class. Constructed from polyurethane, it features an IP rating of 68, is offered in three different lengths and 2 different wattages. The side version is perfect for designs that require a horizontal bend, either left or right.

- Side emitting LED – For applications requiring indirect light.
- UV & chemical resistant.
- 5W & 10W options available in either 1m, 3m, or 5m rolls.
- Custom lengths available upon request. (Minimum order quantity).
- IP 68 – Suitable outdoors & wet areas.
- Dimmable – Determined by driver.

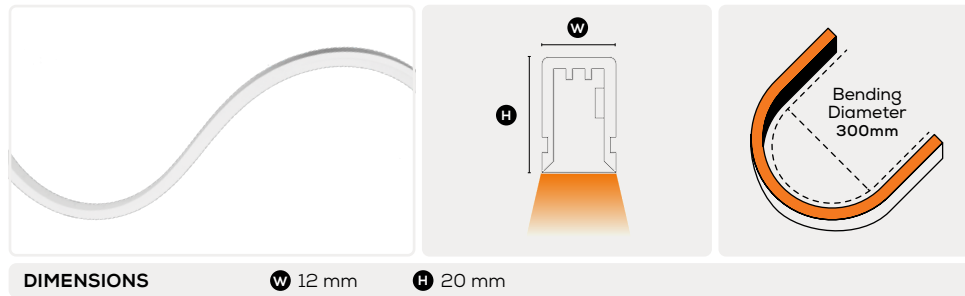

### DIMENSIONS

W 12 mm

H 20 mm

### LUMINAIRE OPTIONS

#### LED & LUMENS OPTIONS (3000K & 4000K)

**5W PER METER**  
264 lm

**10W PER METER**  
528 lm

### GENERAL SPECIFICATIONS

**LED 24V DC** 5W p/m 10W p/m

**LUMENS (3000K & 4000K)** 264 528

**EFFICACY P/METER** 53 lm/w 53 lm/w

**COLOUR** 3000K, Warm White  
4000K, Cool White

**MATERIAL** Polyurethane

**FINISH** White

**BEAM** 120°

**CRI** 92+

**IP** 68

**COLOUR DEVIATION** SDCM ≤2

**BENDING DIAMETER** 300mm

**LIFETIME** > 54,000hrs L80B10

**WARRANTY** 5 Years

**LENGTHS AVAILABLE** 1m | 3m | 5m  
Custom lengths are available with a minimum order request.

### COMPATIBLE CASAMBI DEVICES

BasicDIM 24V Wireless 4ch **71-CAS24V**

BasicDIM Driver 24V 150W **71-CAS24V150**

BasicDIM Driver 24V 100W **71-CAS24V100**

BasicDIM Driver 24V 60W **71-CAS24V60**

BasicDIM Driver 24V 35W **71-CAS24V35**

### PROJECT DETAILS

#### PROJECT

#### TYPE

#### NOTES

### PRODUCT CODES

#### 5W

3000K, 1m **10-FPSF0531**  
3000K, 3m **10-FPSF0533**  
3000K, 5m **10-FPSF0535**  
4000K, 1m **10-FPSF0541**  
4000K, 3m **10-FPSF0543**  
4000K, 5m **10-FPSF0545**

#### 10W

3000K, 1m **10-FPSF1031**  
3000K, 3m **10-FPSF1033**  
3000K, 5m **10-FPSF1035**  
4000K, 1m **10-FPSF1041**  
4000K, 3m **10-FPSF1043**  
4000K, 5m **10-FPSF1045**

### ACCESSORY

#### ALUMINIUM PROFILE

**MATERIAL** Aluminium

**PRODUCT CODE** 10-FP1220P1

**DIMENSIONS** 1000 (L) x 14.4 (W)  
x 21.4 (H) mm

