


FLOW SIDE **G2**

Bringing LED strip lighting to the next level, Flow is an advanced silicone strip that incorporates more flex and longevity than ever before. Flow Side is perfect for designs that require a horizontal bend, either left or right. With the ability to curve up to 300mm.

- Side emitting – For curving around surface, requiring indirect light.
- UV & chemical resistant.
- 5W, 10W, 15W options.
- High CRI – Bringing out the colours in the space.
- IP 67 – Suitable for outdoor & wet applications.
- Front, side, and bottom cable entry connection options.

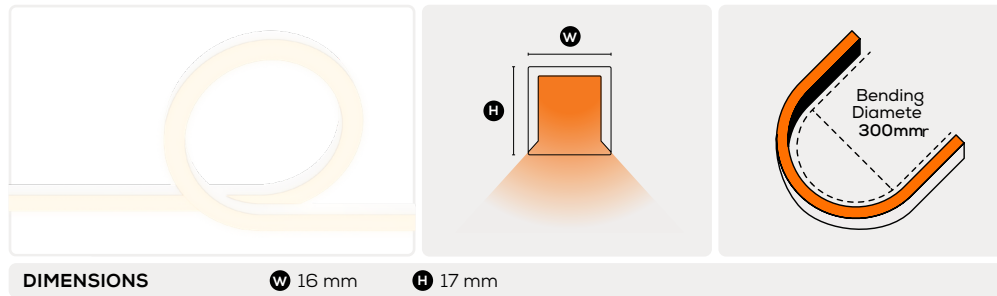

DIMENSIONS **W** 16 mm **H** 17 mm

LUMINAIRE OPTIONS

LED & LUMENS OPTIONS (3000K | 4000K)

5W PER METER
294lm | 294lm

10W PER METER
537lm | 548lm

15W PER METER
824lm | 824lm

GENERAL SPECIFICATIONS

LED **LUMENS** 3000K | 4000K

5W p/m 294lm | 294lm

10W p/m 537lm | 548lm

15W p/m 824lm | 824lm

EFFICACY P/METER Up To 59 lm/w

COLOUR 3000K, Warm White
4000K, Cool White

MATERIAL Extruded Silicone

FINISH White

BEAM 120°

CRI 90+

IP 67

COLOUR DEVIATION SDCM ≤2

BENDING DIAMETER 300mm

LIFETIME > 54,000hrs L70B10

WARRANTY 5 Years

CUTTING LENGTH & MAX RUN LENGTH

LED	CUTTING LENGTHS	MAX RUN LENGTH (Integrated DIY)
5W	50mm	30m 15m
10W	50mm	20m 10m
15W	50mm	15m 6.6m

Allow for 9mm extra on each side for end caps.

PROJECT DETAILS

PROJECT

TYPE

NOTES

PRODUCT CODES

5W	3000K, 120°	10-FL1617S053
	4000K, 120°	10-FL1617S054
10W	3000K, 120°	10-FL1617S103
	4000K, 120°	10-FL1617S104
15W	3000K, 120°	10-FL1617S153
	4000K, 120°	10-FL1617S154

COMPATIBLE CASAMBI DEVICES

BasicDIM 24V Wireless 4ch	71-CAS24V
BasicDIM Driver 24V 150W	71-CAS24V150
BasicDIM Driver 24V 100W	71-CAS24V100
BasicDIM Driver 24V 60W	71-CAS24V60
BasicDIM Driver 24V 35W	71-CAS24V35



FLOW SIDE **G2** ACCESSORIES

SIDE CABLE ENTRY

Side Cable, Right Entry **10-FL1617SPSRE**

Side Cable, Left Entry **10-FL1617SPSLE**

DIMENSIONS N/A

CABLE ENTRY Side

REAR CABLE ENTRY

Rear Cable, Right Entry **10-FL1617SPRER**

Rear Cable, Left Entry **10-FL1617SPREL**

DIMENSIONS N/A

CABLE ENTRY Rear

STRAIGHT CABLE ENTRY

Straight Cable, Right Entry **10-FL1617SPFER**

Straight Cable, Left Entry **10-FL1617SPFEL**

DIMENSIONS N/A

CABLE ENTRY Front

ALUMINIUM PROFILE

Aluminium Profile **10-FL1617P2**

DIMENSIONS 1000 (L) x 20.2 (W) x
20.8 (H) mm

MATERIAL Aluminium

FINISH Silver

MOUNTING CLIPS (SET OF 4)

Mounting Clips **10-FL1617MC**

DIMENSIONS 20 (L) x 16.6 (W) x
12.4 (H) mm

MATERIAL Aluminium

FINISH Silver

NOTES Each meter requires
4 clips and 4 screws

END CAP

Mounting Clips **10-FL1617SEC**

DIMENSIONS 26.5 (L) x 17 (W)
24.2 X (H) mm

MATERIAL Stainless Steel

IP 67