


FLOW TOP G2

Bringing LED strip lighting to the next level, Flow is an advanced silicone strip that incorporates more flex and longevity than ever before. Flow Top is perfect for designs that require a straight application or a vertical bend, and can curve up to 300mm.

- Top emitting light direction –For applying direct light to spaces.
- UV & chemical resistant.
- 5W, 10W, 15W options.
- High CRI – Bringing out the colours in the space.
- IP 67 – Suitable for outdoor & wet applications.
- Front, side, and bottom cable entry connection options.

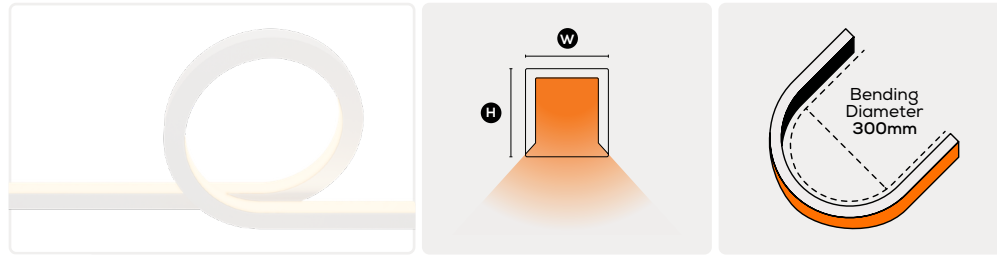

DIMENSIONS **W** 16 mm **H** 17 mm

LUMINAIRE OPTIONS

LED & LUMENS OPTIONS (3000K | 4000K)

5W PER METER
342lm | 356lm

10W PER METER
673lm | 702lm

15W PER METER
967lm | 1016lm

GENERAL SPECIFICATIONS

LED **LUMENS** 3000K | 4000K

5W p/m 342lm | 356lm

10W p/m 673lm | 702lm

15W p/m 967lm | 1016lm

EFFICACY P/METER Up To 71 lm/w

COLOUR 3000K, Warm White
4000K, Cool White

MATERIAL Extruded Silicone

FINISH White

BEAM 120°

CRI 90+

IP 67

IK 08

COLOUR DEVIATION SDCM ≤2

BENDING DIAMETER 300mm

LIFETIME > 54,000hrs L70B10

WARRANTY 5 Years

CUTTING LENGTH & MAX RUN LENGTH

LED **CUTTING LENGTHS** **MAX RUN LENGTH** (Integrated | DIY)

5W 50mm 30m | 15m

10W 50mm 20m | 10m

15W 50mm 15m | 6.6m

Allow for 9mm extra on each side for end caps.

PROJECT DETAILS

PROJECT

TYPE

NOTES

PRODUCT CODES

5W 3000K, 120° **10-FL1617T053**

4000K, 120° **10-FL1617T054**

10W 3000K, 120° **10-FL1617T103**

4000K, 120° **10-FL1617T104**

15W 3000K, 120° **10-FL1617T153**

4000K, 120° **10-FL1617T154**

COMPATIBLE CASAMBI DEVICES

BasicDIM 24V Wireless 4ch **71-CAS24V**

BasicDIM Driver 24V 150W **71-CAS24V150**

BasicDIM Driver 24V 100W **71-CAS24V100**

BasicDIM Driver 24V 60W **71-CAS24V60**

BasicDIM Driver 24V 35W **71-CAS24V35**



FLOW TOP ACCESSORIES

SIDE CABLE ENTRY

Side Cable, Right Entry **10-FL1617TPSRE**

Side Cable, Left Entry **10-FL1617TPSLE**

DIMENSIONS N/A

CABLE ENTRY Side

REAR CABLE ENTRY

Rear Cable, Right Entry **10-FL1617TPRER**

Rear Cable, Left Entry **10-FL1617TPREL**

DIMENSIONS N/A

CABLE ENTRY Rear

STRAIGHT CABLE ENTRY

Straight Cable, Right Entry **10-FL1617TPFER**

Straight Cable, Left Entry **10-FL1617TPFEL**

DIMENSIONS N/A

CABLE ENTRY Front

ALUMINIUM PROFILE

Aluminium Profile **10-FL1617P2**

DIMENSIONS 1000 (L) x 20.2 (W) x
20.8 (H) mm

MATERIAL Aluminium

FINISH Silver

MOUNTING CLIPS (SET OF 4)

Mounting Clips **10-FL1617MC**

DIMENSIONS 20 (L) x 16.6 (W) x
12.4 (H) mm

MATERIAL Aluminium

FINISH Silver

NOTES Each meter requires
4 clips and 4 screws

END CAP

Mounting Clips **10-FL1617TEC**

DIMENSIONS 26.5 (L) x 17 (W)
24.2 X (H) mm

MATERIAL Stainless Steel

IP 67