


## LINEX 11 BALL

The LineX offers a minimalistic approach to track lighting, in comparison to the larger, but more versatile 3 Circuit Track. With a smaller profile, and smaller fittings available for it, the LineX is ideal for residential lighthing.

- High CRI – Defining architectural details and finishes.
- Seamless Ambience – Creating a balanced and uniform glow in all directions, showcasing an elegant design and warm ambience.
- Dimmable – Featuring 24V DC allows any of the LineX fittings to be dimmed in multiple ways.

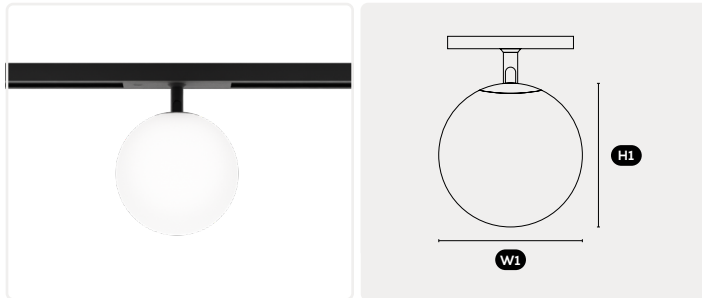

### DIMENSIONS

H1 80mm

W1 Ø80mm

### GENERAL SPECIFICATIONS

LED	LUMENS (3000K)
2W	150 lm
EFFICACY	Up to 75 Lm/W
COLOUR	3000K, Warm White
MATERIAL	Powder Coated Aluminium
FINISH	Black
BEAM	Indirect
CRI	90+
IP	20
COLOUR DEVIATION	SDCM ≤5
UGR	N/A
LIFETIME	> 50,000hrs L80B10
WARRANTY	5 Years

### DRIVER SPECIFICATIONS

POWER	24V DC
DIMMING	Phase-Cut / DALI Dimming / 1-10V
POWER FACTOR	> 0.95

### PROJECT DETAILS

#### PROJECT

#### TYPE

#### NOTES

### PRODUCT CODES

Black, 3000K


7-LX11SPD80



## LINEX 11 TRACK

The LineX offers a minimalistic approach to track lighting, in comparison to the larger, but more versatile 3 Circuit Track. With a smaller profile, and smaller fittings available for it, the LineX is ideal for residential lighthing.

- Dimmable – Featuring 24V DC allows any of the LineX fittings to be dimmed in multiple ways.
- Versatile design – Featuring a variety of track components to create any layout.
- Endless ways to light – With 3 unique light fittings to utilise with the LineX Track or Recessed Track options.
- Surface mounted & recessed track options.

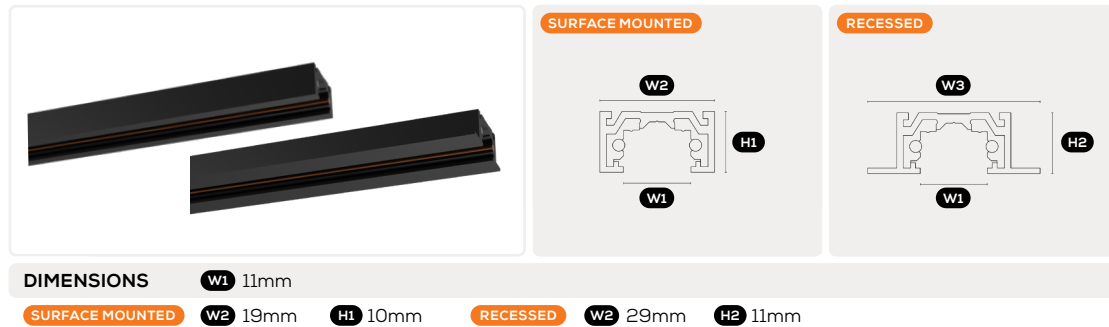

### TRACK OPTIONS

#### MOUNTING OPTIONS

**SURFACE** **RECESSED**

#### LENGTH OPTIONS

**3M** **2M** **1M**

### GENERAL SPECIFICATIONS

<b>MATERIAL</b>	Powder Coated Metal
<b>FINISH</b>	Black
<b>WARRANTY</b>	5 Years

### DRIVER SPECIFICATIONS

<b>POWER</b>	24V DC
<b>DIMMING</b>	Phase-Cut / DALI Dimming / 1-10V

### PROJECT DETAILS

#### PROJECT

#### TYPE

#### NOTES

### PRODUCT CODES

Surface Mounted, 1m	<b>7-LX11SM1000</b>
Surface Mounted, 2m	<b>7-LX11SM2000</b>
Surface Mounted, 3m	<b>7-LX11SM3000</b>
Recessed, 1m	<b>7-LX11RET1000</b>
Recessed, 2m	<b>7-LX11RET2000</b>
Recessed, 3m	<b>7-LX11RET3000</b>

### ACCESSORIES

Corner Connector	<b>7-LX11SMLHC</b>
Recessed Corner Connector	<b>7-LX11RETLHC</b>
Feed Piece	<b>7-LX11LEF</b>
Recessed Feed Piece	<b>7-LX11LEF01</b>
Straight Connector	<b>7-LX11LEJCO1</b>
End Cap	<b>7-LX11SMTEK</b>
Recessed End Cap	<b>7-LX11RETTEK</b>
Cover	<b>7-LX11BCA</b>

