LINEX 11 SPOT

The LineX offers a minimalistic approach to track lighting, in comparison to the larger, but more versatile 3 Circuit Track. With a smaller profile, and smaller fittings available for it, the LineX is ideal for residential lighthing.

- High CRI Defining architectural details and finishes.
- Light any direction The LineX 11 Spot can rotate 350°, and be adjusted up to 90°.
- Dimmable Featuring 24V DC allows any of the LineX fittings to be dimmed in multiple ways.



| | LUMINAIRE OPTIONS | | | | |
|----------|-------------------|------------------------|--|--|--|
| BEAM | BEAM OPTIONS | | | | |
| 45° | STANDARD | 36° 24° 18° | | | |
| | | | | | |
| | | GENERAL SPECIFICATIONS | | | |
| LED | | LUMENS (3000K) | | | |
| 8W | | 600 lm | | | |
| EFFICACY | | Up to 67 Lm/W | | | |

| COLOUR | 3000K, Warm White |
|------------------|-------------------------|
| MATERIAL | Powder Coated Aluminium |
| FINISH | Black |
| CRI | 90+ |
| IP | 20 |
| COLOUR DEVIATION | SDCM ≤3 |
| UGR | <19 |
| LIFETIME | > 50,000hrs L80B10 |
| WARRANTY | 5 Years |
| | |

| DRIVER SPECIFICATIONS | | |
|---------------------------------|--|--|
| 4V DC | | |
| nase-Cut / DALI Dimming / 1-10V | | |
| 0.95 | | |
| | | |

PROJECT DETAILS

| PRC | JJE | ECT |
|-----|-----|-----|

TYPE

NOTES

PRODUCT CODES Black, 3000K 7-LX11RS408W ACCESSORIES 36° Lens 7-LNS36 24° Lens 7-LNS24 18° Lens 7-LNS18



$\neg \land \neg \sqsubseteq_{\circ}$

1300 438 609 fazelight.com

LINEX 11 TRACK


The LineX offers a minimalistic approach to track lighting, in comparison to the larger, but more versatile 3 Circuit Track. With a smaller profile, and smaller fittings available for it, the LineX is ideal for residential lighthing.

- Dimmable Featuring 24V DC allows any of the LineX fittings to be • dimmed in multiple ways.
- Versatile design Featuring a variety of track components to create • any layout.
- Endless ways to light - With 3 unique light fittings to utilise with the LineX Track or Recessed Track options.
- Surface mounted & recessed track options.

PROJECT

TYPE

NOTES

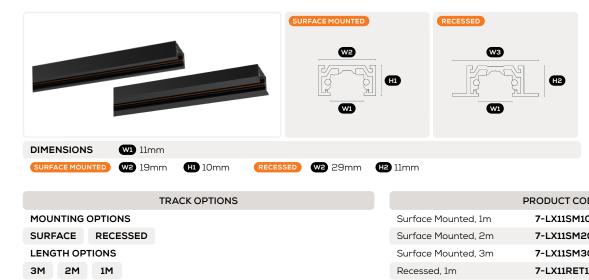

| GENERAL SPECIFICATIONS | | |
|------------------------------|---------|--|
| MATERIAL Powder Coated Metal | | |
| FINISH | Black | |
| WARRANTY | 5 Years | |
| | | |
| DRIVER SPECIFICATIONS | | |

24V DC POWER DIMMING Phase-Cut / DALI Dimming / 1-10V

| F | RODUCT CODES | |
|---------------------------|---------------|--|
| Surface Mounted, 1m | 7-LX11SM1000 | |
| Surface Mounted, 2m | 7-LX11SM2000 | |
| Surface Mounted, 3m | 7-LX11SM3000 | |
| Recessed, 1m | 7-LX11RET1000 | |
| Recessed, 2m | 7-LX11RET2000 | |
| Recessed, 3m | 7-LX11RET3000 | |
| | | |
| ACCESSORIES | | |
| Corner Connector | 7-LX11SMLHC | |
| Recessed Corner Connector | 7-LX11RETLHC | |
| Feed Piece | 7-LX11LEF | |
| Recessed Feed Piece | 7-LX11LEF01 | |
| Straight Connector | 7-LX11LEJC01 | |
| End Cap | 7-LX11SMTEK | |
| Recessed End Cap | 7-LX11RETTEK | |
| Cover | 7-LX11BCA | |



