
# **LINEX 11 STRIP**

The LineX offers a minimalistic approach to track lighting, in comparison to the larger, but more versatile 3 Circuit Track. With a smaller profile, and smaller fittings available for it, the LineX is ideal for residential lighthing.

- High CRI Defining architectural details and finishes.
- Strip lighting made easy Fitting into your choice of track, the LineX ٠ Strip provides a sleek and effortless option for LED strips.
- Dimmable – Featuring 24V DC allows any of the LineX fittings to be dimmed in multiple ways.

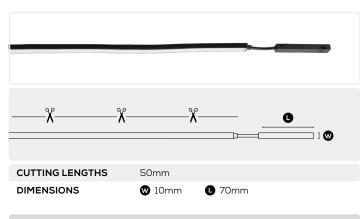

LUMINAIRE OPTIONS

LENGTH OPTIONS

2500mm 1250mm

GENERAL SPECIFICATIONS		
COLOUR	3000K, Warm White	
MATERIAL	Silicone + PC	
FINISH	Black	
BEAM	110°	
CRI	90+	
IP	20	
COLOUR DEVIATION	OLOUR DEVIATION SDCM ≤5	
LIFETIME	> 50,000hrs L80B10	
WARRANTY	5 Years	

#### PROFILE OPTIONS

LineX 11 Surface Mounted 1000mm	7-LX11SM1000
LineX 11 Surface Mounted 2000mm	7-LX11SM2000
LineX 11 Surface Mounted 3000mm	7-LX11SM3000
LineX 11 Recessed 1000mm	7-LX11RET1000
LineX 11 Recessed 2000mm	7-LX11RET2000
LineX 11 Recessed 3000mm	7-LX11RET3000

### DRIVER SPECIFICATIONS

POWER DIMMING 24V DC Phase-Cut/DALI Dimming PROJECT

TYPE

NOTES

1250mm			
GENERAL SPECIFICATIONS			
LED	LUMENS (3000K & 4000K)		
13W	480 lm		
EFFICACY P/METER	Up to 37 Lm/w		
MAX RUN LENGTH	1250mm		
PRODUCT CODES			
3000K	7-LX11GL12501		
2500mm			
GENER	RAL SPECIFICATIONS		
GENER	RAL SPECIFICATIONS LUMENS (3000K & 4000K)		
LED	LUMENS (3000K & 4000K)		
LED 25W	LUMENS (3000K & 4000K) 920 lm		
LED 25W EFFICACY P/METER MAX RUN LENGTH	LUMENS (3000K & 4000K) 920 lm Up to 37 Lm/w		





## **LINEX 11 TRACK**


The LineX offers a minimalistic approach to track lighting, in comparison to the larger, but more versatile 3 Circuit Track. With a smaller profile, and smaller fittings available for it, the LineX is ideal for residential lighthing.

- Dimmable Featuring 24V DC allows any of the LineX fittings to be • dimmed in multiple ways.
- Versatile design Featuring a variety of track components to create • any layout.
- Endless ways to light - With 3 unique light fittings to utilise with the LineX Track or Recessed Track options.
- Surface mounted & recessed track options.

## PROJECT

TYPE

NOTES

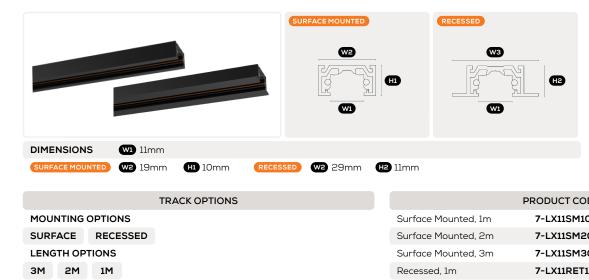

GENERAL SPECIFICATIONS		
MATERIAL	Powder Coated Metal	
FINISH	Black	
WARRANTY	5 Years	
DRIVER SPECIFICATIONS		

24V DC POWER DIMMING Phase-Cut / DALI Dimming / 1-10V

F	RODUCT CODES
Surface Mounted, 1m	7-LX11SM1000
Surface Mounted, 2m	7-LX11SM2000
Surface Mounted, 3m	7-LX11SM3000
Recessed, 1m	7-LX11RET1000
Recessed, 2m	7-LX11RET2000
Recessed, 3m	7-LX11RET3000
	ACCESSORIES
Corner Connector	7-LX11SMLHC
Recessed Corner Connector	7-LX11RETLHC
Feed Piece	7-LX11LEF
Recessed Feed Piece	7-LX11LEF01
Straight Connector	7-LX11LEJC01
End Cap	7-LX11SMTEK
Recessed End Cap	7-LX11RETTEK
Cover	7-LX11BCA



