


LITE 108

The high-performance LITE 108 combines high lumen per watt efficacy and dynamic illumination. It also features a uniquely designed heat sink, for maximum heat dissipation in projects with minimum ceiling space.

- Precision reflector with clear lens – For better light distribution.
- Specially designed heat sink – For class leading heat dissipation.
- IP44 Rated – Suitable for wet areas.
- IC-4 Rated.

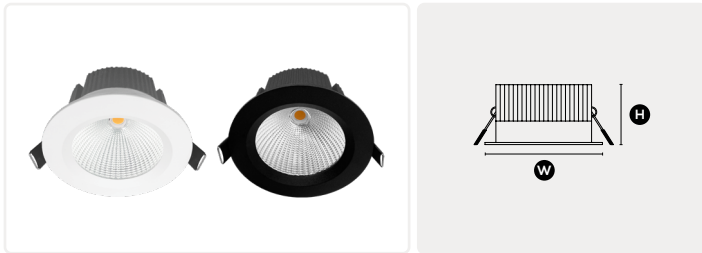

DIMENSIONS **W** Ø108 mm **H** 56 mm

CUT-OUT **Ø** 92mm

LUMINAIRE OPTIONS

LED & LUMENS OPTIONS (3000K | 4000K)

12W 1060lm | 1130lm

10W 860lm | 880lm

BEAM OPTIONS

60° **STANDARD** 36°

FINISHES

☐ WHITE ☒ BLACK

GENERAL SPECIFICATIONS

EFFICACY Up to 94 Lm/W

COLOUR 3000K, Warm White
4000K, Cool White

MATERIAL Powder Coated Material

CRI 92+

IP 44

COLOUR DEVIATION SDCM ≤2

UGR <23

LIFETIME > 55,000hrs L80B10

WARRANTY 5 Years

DRIVER SPECIFICATIONS

DIMENSIONS L 104 x W 43 x H 24mm

POWER 300mA | 250mA 240V
Remote Dimmable Driver

DIMMING Phase Cut Dimming

POWER FACTOR > 0.90

PROJECT DETAILS

PROJECT

TYPE

NOTES

PRODUCT CODES

White, 3000K **118-LI2L12W603**

White, 4000K **118-LI2L12W604**

Black, 3000K **118-LI2L12B603**

Black, 4000K **118-LI2L12B604**

ACCESSORIES

36° Reflector **118-RFLL36**

DRIVER CODES

12W **118-300MA**

10W **118-250MA**

