


LITE 108 IP 65

The high-performance LITE 108 combines high lumen per watt efficacy and dynamic illumination. It also features a uniquely designed heat sink, for maximum heat dissipation in projects with minimum ceiling space.

- Precision reflector with clear lens – For better light distribution.
- Specially designed heat sink – For class leading heat dissipation.
- IP65 Rated – Suitable for very wet areas.
- IC-4 Rated.

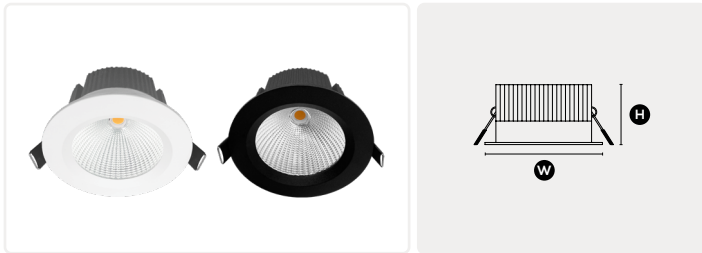

DIMENSIONS W Ø108 mm H 56 mm

CUT-OUT Ø92mm

LUMINAIRE OPTIONS

LED & LUMENS OPTIONS (3000K | 4000K)

12W 1060lm | 1130lm

10W 860lm | 880lm

BEAM OPTIONS

60° **STANDARD** 36°

FINISHES

☐ WHITE ☒ BLACK

GENERAL SPECIFICATIONS

| | |
|-------------------------|--|
| EFFICACY | Up to 94 Lm/W |
| COLOUR | 3000K, Warm White 4000K, Cool White |
| MATERIAL | Powder Coated Material |
| CRI | 92+ |
| IP | 65 |
| COLOUR DEVIATION | SDCM ≤2 |
| UGR | <23 |
| LIFETIME | > 55,000hrs L80B10 |
| WARRANTY | 5 Years |

DRIVER SPECIFICATIONS

| | |
|---------------------|--|
| DIMENSIONS | L 104 x W 43 x H 24mm |
| POWER | 300mA 250mA 240V Remote Dimmable Driver |
| DIMMING | Phase Cut Dimming |
| POWER FACTOR | > 0.90 |

PROJECT DETAILS

PROJECT

TYPE

NOTES

PRODUCT CODES

| | |
|---------------------|-------------------------|
| White, 3000K, IP 65 | 118-LI2L12W603IP |
| White, 4000K, IP 65 | 118-LI2L12W604IP |
| Black, 3000K, IP 65 | 118-LI2L12B603IP |
| Black, 4000K, IP 65 | 118-LI2L12B604IP |

ACCESSORIES

| | |
|---------------|-------------------|
| 36° Reflector | 118-RFLL36 |
|---------------|-------------------|

DRIVER CODES

| | |
|-----|------------------|
| 12W | 118-300MA |
| 10W | 118-250MA |

