


## LITE 125

The high-performance LITE 125 features high lumen per watt efficacy and visually dynamic illumination; ideal for large-scale commercial projects that require higher powered fittings. Now leading the Lite Series in both lumen output and power.

- Precision reflector with clear lens – For better light distribution.
- Specially designed heat sink – For class leading heat dissipation.
- IP44 Rated – Suitable for wet areas.
- IC-4 Rated.

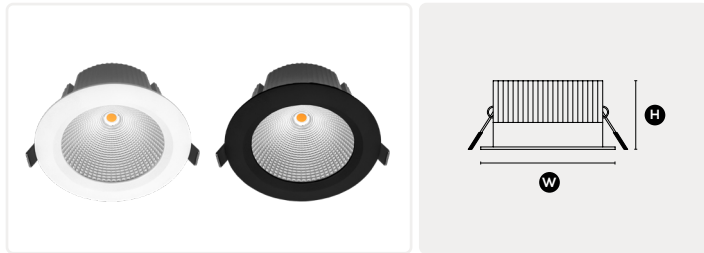

**DIMENSIONS** **W** Ø125 mm **H** 66.5 mm  
**CUT-OUT** **I** Ø110mm

### LUMINAIRE OPTIONS

#### BEAM OPTIONS

60° **STANDARD** 36° 24° 15°

#### FINISHES

☐ WHITE ☒ BLACK

### GENERAL SPECIFICATIONS

<b>LED</b>	<b>LUMENS</b> (3000K   4000K)
25W	2000 lm   2100 lm
<b>EFFICACY</b>	Up to 84 Lm/W
<b>COLOUR</b>	3000K, Warm White 4000K, Cool White
<b>MATERIAL</b>	Powder Coated Material
<b>CRI</b>	92+
<b>IP</b>	44
<b>COLOUR DEVIATION</b>	SDCM ≤2
<b>UGR</b>	<21
<b>LIFETIME</b>	> 55,000hrs L80B10
<b>WARRANTY</b>	5 Years

### DRIVER SPECIFICATIONS

<b>DIMENSIONS</b>	L 104 x W 43 x H 24mm
<b>POWER</b>	600mA 240V Remote Dimmable Driver
<b>DIMMING</b>	Phase Cut Dimming
<b>POWER FACTOR</b>	> 0.90

### PROJECT DETAILS

#### PROJECT

#### TYPE

#### NOTES

### PRODUCT CODES

White, 3000K, 60°	<b>118-LI2W25W603</b>
White, 4000K, 60°	<b>118-LI2W25W604</b>
Black, 3000K, 60°	<b>118-LI2W25B603</b>
Black, 4000K, 60°	<b>118-LI2W25B604</b>

### ACCESSORIES

36° Reflector **118-RFLXL36**

