


## LITE MINI

The high-performance LITE MINI combines high lumen per watt efficacy and dynamic illumination. It also features a uniquely designed heat sink, for maximum heat dissipation in projects with minimum ceiling space.

- Precision reflector with clear lens – For better light distribution.
- Specially designed heat sink – For class leading heat dissipation.
- IP44 Rated – Suitable for wet areas.
- IC-4 Rated.

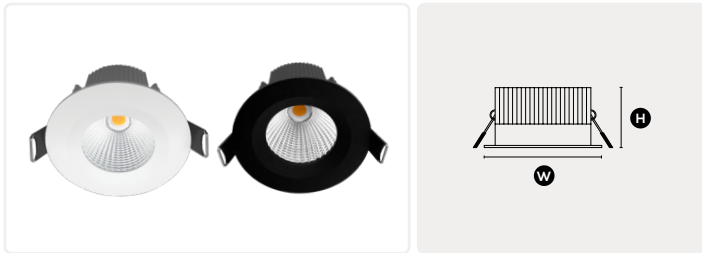

**DIMENSIONS** **W** Ø85 mm **H** 49 mm

**CUT-OUT** **I** Ø76mm

### LUMINAIRE OPTIONS

#### LED & LUMENS OPTIONS (3000K | 4000K)

**10W** 960lm | 1040lm  
**8W** 750lm | 830lm

#### BEAM OPTIONS

60° **STANDARD** 36°

#### FINISHES

☐ WHITE ☒ BLACK

### GENERAL SPECIFICATIONS

<b>EFFICACY</b>	Up to 104 Lm/W
<b>COLOUR</b>	3000K, Warm White 4000K, Cool White
<b>MATERIAL</b>	Powder Coated Material
<b>FINISH</b>	White   Black
<b>CRI</b>	92+
<b>IP</b>	44
<b>COLOUR DEVIATION</b>	SDCM ≤2
<b>UGR</b>	<19
<b>LIFETIME</b>	> 55,000hrs L80B10
<b>WARRANTY</b>	5 Years

### DRIVER SPECIFICATIONS

<b>DIMENSIONS</b>	L 104 x W 43 x H 24mm
<b>POWER</b>	250mA   200mA 240V Remote Dimmable Driver
<b>DIMMING</b>	Phase Cut Dimming
<b>POWER FACTOR</b>	> 0.90

### PROJECT DETAILS

#### PROJECT

#### TYPE

#### NOTES

### PRODUCT CODES

White, 3000K, 60°	<b>118-LI2M10W603</b>
White, 4000K, 60°	<b>118-LI2M10W604</b>
Black, 3000K, 60°	<b>118-LI2M10B603</b>
Black, 4000K, 60°	<b>118-LI2M10B604</b>

### ACCESSORIES

36° Reflector	<b>118-RFLLM36</b>
---------------	--------------------

### DRIVER CODES

10W	<b>118-250MA</b>
8W	<b>118-200MA</b>

