

STARLIGHT LED

The STARLIGHT LED is perfect for illuminating window seats, artwork and feature walls. Its miniscule proportions allow it to fit into even the tightest spaces.


- Versatile aesthetic – Available in 2 finishes & 2 shapes.
- IC-4 Rated.
- IP65 Rated – Suitable for wet areas.

PROJECT DETAILS

PROJECT

TYPE

NOTES

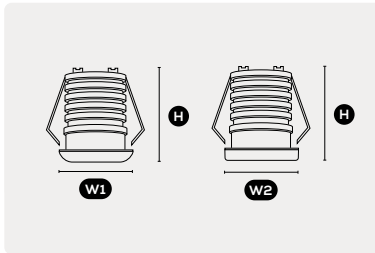

DIMENSIONS **W1** Ø37 mm **W2** 37 x 37mm **H** 35 mm
CUT-OUT Ø32mm

LUMINAIRE OPTIONS

SHAPE

☐ ROUND ☐ SQUARE

FINISHES

☐ WHITE ☒ ANODISED ALUMINIUM

GENERAL SPECIFICATIONS

LED	LUMENS (3000K 4000K)
3W	110 lm 115 lm
EFFICACY	Up to 38 Lm/W
COLOUR	3000K, Warm White 4000K, Cool White
MATERIAL	Powder Coated Material
FINISH	White Anodised Aluminium
BEAM	45°
CRI	80+
IP	65
COLOUR DEVIATION	SDCM ≤2
UGR	<16
LIFETIME	> 55,000hrs L80B10
WARRANTY	3 Years

DRIVER SPECIFICATIONS

DIMENSIONS	L 100 x W 30 x H 23mm
POWER	700mA 240V Dimmable Driver (Sold Separately)
DIMMING	Phase Cut Dimming
POWER FACTOR	> 0.90

PRODUCT CODES

White, Square, 3000K	118-SL2S03W453
White, Square, 4000K	118-SL2S03W454
Aluminium, Square, 3000K	118-SL2S03A453
Aluminium, Square, 4000K	118-SL2S03A454
White, Round, 3000K	118-SL2R03W453
White, Round, 4000K	118-SL2R03W454
Aluminium, Round, 3000K	118-SL2R03A453
Aluminium, Round, 4000K	118-SL2R03A454

