


LINE OPAL series

INTRODUCTION



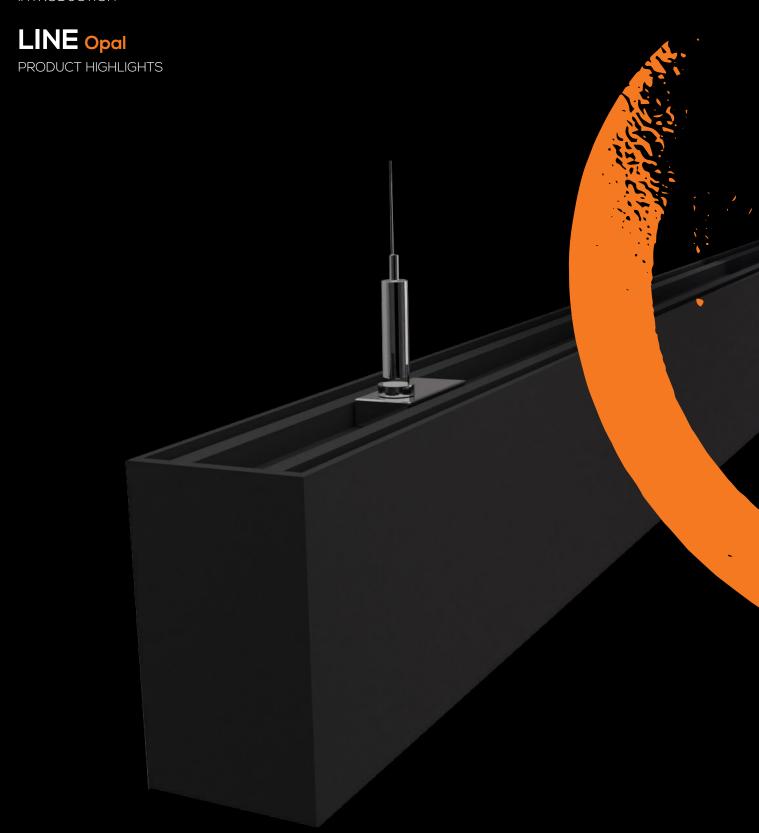

Faze is a brand of Radiant Lighting with over 30 years at the forefront of lighting quality, innovation and design.

As lighting designers, we understand light and what can be achieved using well designed luminaires that are made from the best components.

Based in Perth, FAZE has grown into a truly International company. We source the best quality materials from Japan, Germany, Italy and with a new state of the art production facility in China, we create the best quality luminaires that will stand the test of time. With sustainability in mind, we also do our best to produce luminaires that are environmentally conscious; strategically designing them with components that can be replaced and added to over time.

We take our commitment to Quality and Compliance very seriously, ensuring that we always meet and exceed the highest possible standards. With a new cutting-edge testing and compliance facility based at our head office in Balcatta, we are now leading the way with quality in everything that we do.

We collaborate with architects, designers and builders every single day to incorporate light into their projects. This helps us understand the market and create truly unique and innovative luminaires.


The continued advancement in LED technology provides us with so many opportunities to expand and grow our brand, as well as the ability to make sure that every product stamped with the FAZE logo has the best optical performance and optimal visual comfort no matter what the project.

FAZE aims to fill the gaps in the current lighting market, providing many lighting solutions and endless design possibilities with it's luminaires.

LINE OPAL series

The LINE OPAL series are as practical as they are stylish. With numerous mounting and style options, they providing flexibility across both residential and commercial projects.


Line Opal

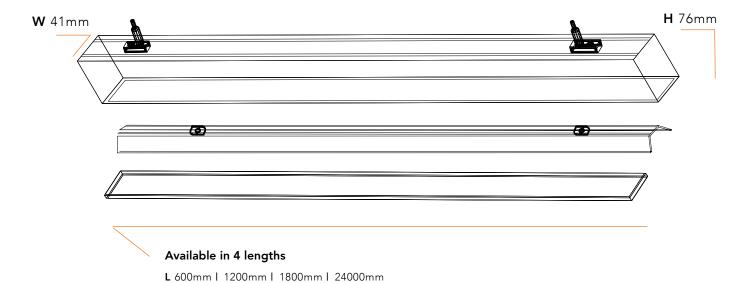

Neat Canopy Installation

Overview


The Line Opal Canopy is easy to install, with just a half twist locking it into the ceiling. There are no visible screws and one of the wire suspensions is mounted through the canopy itself; resulting in a much neater finished product.





GLARE REDUCTION

The Line Opal incorporates a deep set LED heat sink and special opal diffuser, these combined give it a UGR of less than 22; therefore reducing glare and creating visual comfort.

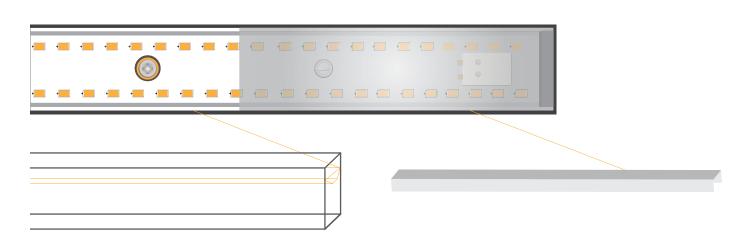


LINE Opal


The LINE OPAL can be surface mounted or suspended; providing flexibility across both residential and commercial projects. If the four different lengths are not enough, you can connect them together and create your own.



QUICK CONNECTION SYSTEM

Our specially designed aluminium joiner is made to fit perfectly between any required lengths and provide super strong support, this results in seamless joins and a flawless visual alignment.

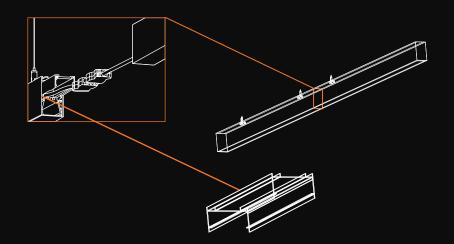

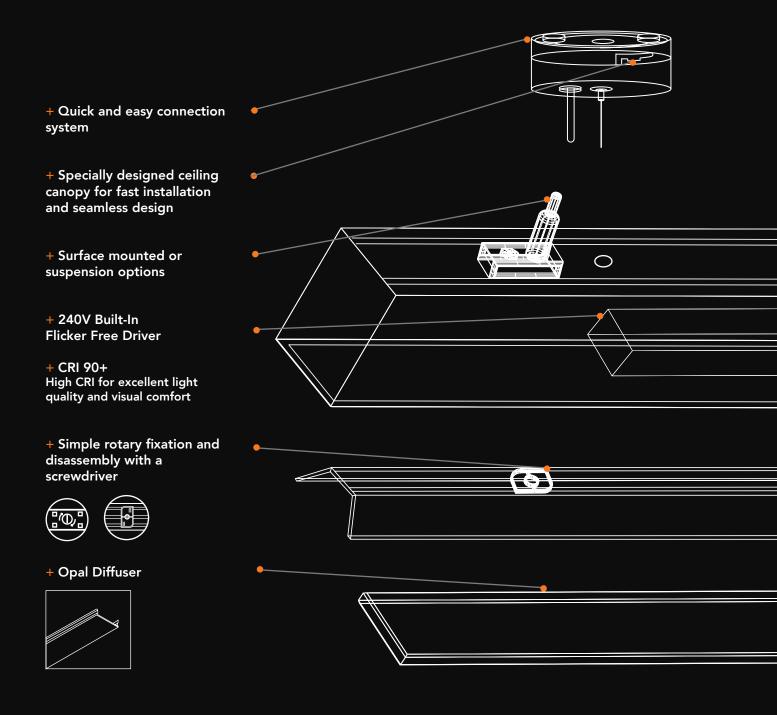

FLICKER FREE DIMMING

Unlike many other linear systems, the Line Opal features phase cut, flicker-free dimming. It's range has a smooth transition between 0-100% with an option of DALI or 1-10 volt if requested.






PRE-CONFIGURED EXAMPLES OF LENGTHS USING LINEAR MODULES

	3000mm			
2400mm	600mm			
2400mm	3600mm			
240011111	120011111			
	4200mm			
2400mm	1800mm			
		4800mm		
2400mm	2400mm			
	T			
2400mm	2400mm	5400mm		
2.00	2.00			
		6000mm		
2400mm	2400mm	1200mm		
2400mm	2400mm	6600mm		
			7200mm	
2400mm	2400mm	2400mm		
			7800mm	
2400mm	2400mm	2400mm	600mm	
			8400mm	
2400mm	2400mm	2400mm	1200mm	
				00mm
2400mm	2400mm	2400mm	1800mm	
				9600mm
2400mm	2400mm	2400mm	2400mm	YOUUMN

Additional length added onto the 2400mm length fitting

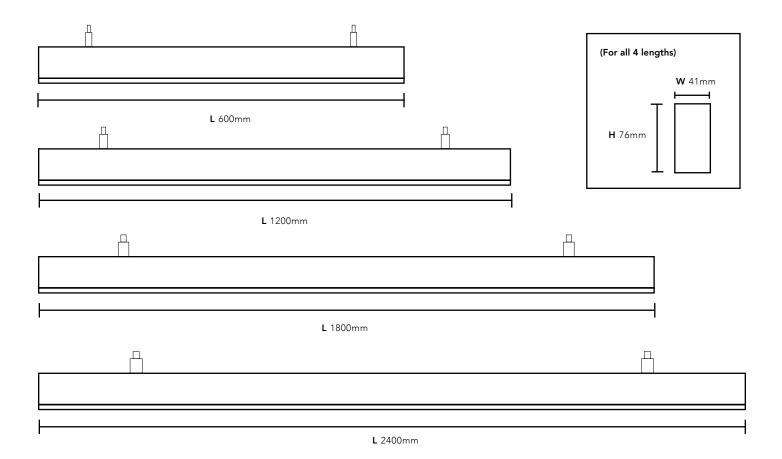

LNE OPAL

PRODUC	T CODE
600mm, 15W, White, 3000K	7-LI410615W903
600mm, 15W, White, 4000K	7-LI410615W904
600mm, 15W, Black, 3000K	7-LI410615B903
600mm, 15W, Black, 4000K	7-LI410615B904
1200mm, 30W, White, 3000K	7-LI411230W903
1200mm, 30W, White, 4000K	7-LI411230W904
1200mm, 30W, Black, 3000K	7-LI411230B903
1200mm, 30W, Black, 4000K	7-LI411230B904
1800mm, 40W, White, 3000K	7-LI411840W903
1800mm, 40W, White, 4000K	7-LI411840W904
1800mm, 40W, Black, 3000K	7-LI411840B903
1800mm, 40W, Black, 4000K	7-LI411840B904
2400mm, 60W, White, 3000K	7-LI412460W903
2400mm, 60W, White, 4000K	7-LI412460W904
2400mm, 60W, Black, 3000K	7-LI412460B903
2400mm, 60W, Black, 4000K	7-LI412460B904

DRIVER SPECIFICATIONS		
Power 240V Built-in Flicker Free Dimmable Driver		
Dimming	Phase Cut Dimming	
Power Factor	> 0.90	

ACCESSORIES					
Aluminium Joiners	7-LI41CONNECT				
GENERAL SPECIFICATIONS					
LED	15W 30W 40W 60W				
Lumens	1200 lm 2400 lm 3200 lm 4800 lm (3000K)				
Colour	3000K, Warm White				
Efficacy	80 lm/w (3000K)				
Beam	90°				
Material	Aluminium				
CRI	90+				
Finish	White Black				
IP	40				
Colour Deviation	SDCM ≥3				
Warranty	5 Years				
Lifetime	pending				





















1300 438 609

Radiant Lighting 10 Gibberd Road Balcatta W.A 6021

www.faze.com.au