



radiantlighting®

MODUX 1 POLE SPOT

By LuxR


OUTDOOR

New to our Modux One range is the Pole Spot. The adjustable head, with the option of a Spot Flange or Glare Guard, allows for total control over the direction of light. Ideal for lighting sculptures, trees, shrubs & grasses. Custom pole lengths available, 400mm standard.

PROJECT

TYPE

NOTES

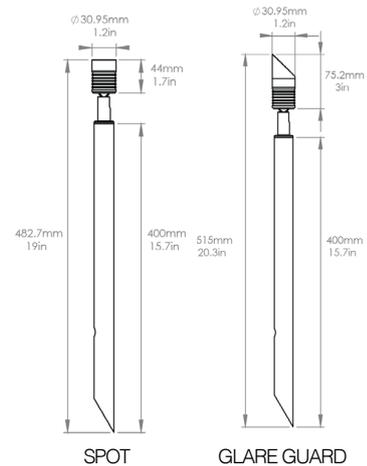

GENERAL SPECIFICATIONS

LED	1 W
LUMENS	80 Lm
EFFICACY	80 Lm / W
COLOUR TEMPERATURE	2700K 3000K 4000K
MATERIAL	Natural Copper 316 Stainless Steel Powder Coated Aluminium
FINISH	Copper, Stainless Steel, Black, Bronze, White
BEAM	15°, 30°, 53°, 50+17°
CRI	90+
IP	67
WARRANTY	10 Years: Stainless Steel & Copper 5 Years: Aluminium & Electronics
ORIGIN	New Zealand

POWER SPECIFICATIONS

DRIVER SERIES WIRING	350mA Constant Current (Remote)
DRIVER PARALLEL WIRING	12VAC (Integral) Remote 12V Transformer Required 24VDC (Integral) Remote 24V Driver Required


PRODUCT CODES (SERIES WIRING)

CODES AVAILABLE UPON REQUEST

PARALLEL WIRING AVAILABLE UPON REQUEST

SERIES WIRING

INPUT 240VAC OUTPUT DC Constant Current



PARALLEL WIRING

INPUT 240VAC OUTPUT 12VAC | 24VDC

