



radiantlighting®

## MODUX 2 POLE SPOT

By LuxR


OUTDOOR

New to our Modux Two range is the Pole Spot. The adjustable head, with the option of a Spot Flange or Glare Guard, allows for total control over the direction of light. Ideal for lighting sculptures, trees, shrubs & grasses. Custom pole lengths available, 400mm standard.

### PROJECT

TYPE

NOTES

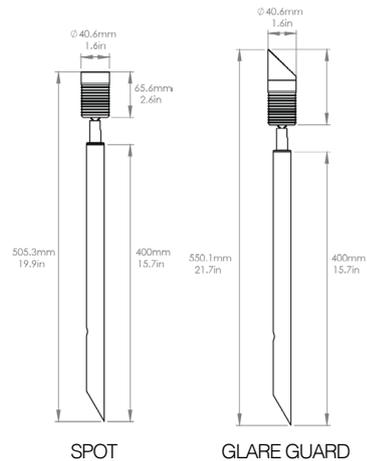

### GENERAL SPECIFICATIONS

LED	2 W
LUMENS	340 Lm
EFFICACY	170 Lm / W
COLOUR TEMPERATURE	2700K   3000K   4000K
MATERIAL	Natural Copper 316 Stainless Steel Powder Coated Aluminium
FINISH	Copper, Stainless Steel, Black, Bronze, White
BEAM	26°, 36°, 74°
CRI	90+
IP	67
WARRANTY	10 Years: Stainless Steel & Copper 5 Years: Aluminium & Electronics
ORIGIN	New Zealand

### POWER SPECIFICATIONS

DRIVER SERIES WIRING	700mA Constant Current (Remote)
DRIVER PARALLEL WIRING	12VAC (Integral) Remote 12V Transformer Required 24VDC (Integral) Remote 24V Driver Required


### PRODUCT CODES (SERIES WIRING)

CODES AVAILABLE UPON REQUEST

PARALLEL WIRING AVAILABLE UPON REQUEST

### SERIES WIRING

INPUT 240VAC OUTPUT DC Constant Current



### PARALLEL WIRING

INPUT 240VAC OUTPUT 12VAC | 24VDC

