



radiantlighting®

MODUX 1 HALO

By LuxR


OUTDOOR

This 1 inch diameter miniature teir light produces plenty of light creating a downward 360° wash without any glare. Regular pole length = 700mm (custom length available on request). Surface mount flange accessory available.

PROJECT

TYPE

NOTES

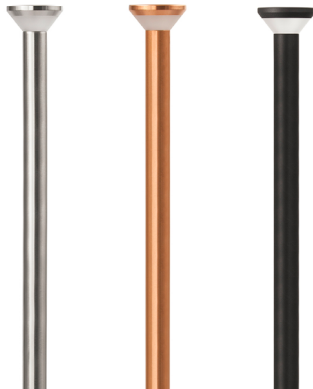

GENERAL SPECIFICATIONS

LED	1 W
LUMENS	80 Lm
EFFICACY	80 Lm / W
COLOUR TEMPERATURE	2700K 3000K 4000K
MATERIAL	Natural Copper 316 Stainless Steel Powder Coated Aluminium
FINISH	Finish
BEAM	360° Downward Wash
CRI	90+
IP	68
WARRANTY	10 Years: Stainless Steel & Copper 5 Years: Aluminium & Electronics
ORIGIN	New Zealand

POWER SPECIFICATIONS

DRIVER SERIES WIRING	350mA Constant Current (Remote)
DRIVER PARALLEL WIRING	12VAC (Integral) Remote 12V Transformer Required 24VDC (Integral) Remote 24V Driver Required


PRODUCT CODES (SERIES WIRING)

BLACK	128-M1HRABK30
COPPER	128-M1HRC30
STAINLESS STEEL	128-M1HRS30

PARALLEL WIRING AVAILABLE UPON REQUEST

SERIES WIRING

INPUT 240VAC OUTPUT DC Constant Current



PARALLEL WIRING

INPUT 240VAC OUTPUT 12VAC | 24VDC

