



radiantlighting®

MODUX 1 WAYFINDER

By LuxR


OUTDOOR

This 1 inch diameter miniature pole light produces plenty of light in an asymmetric wash, without glare. Precision machined in marine grade 316 stainless steel, copper or powdercoated aluminium, the luminaire achieves IP68 water ingress rating for piece of mind.

PROJECT

TYPE

NOTES

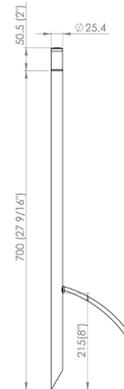

GENERAL SPECIFICATIONS

LED	1 W
LUMENS	80 Lm
EFFICACY	80 Lm / W
COLOUR TEMPERATURE	2700K 3000K 4000K
MATERIAL	Natural Copper Stainless Steel Powder Coated Aluminium
FINISH	Black, Copper, Stainless Steel
BEAM	Asymmetric Wash
CRI	90+
IP	67
WARRANTY	10 Years: Copper & Stainless Steel 5 Years: Electronics & Aluminium
ORIGIN	New Zealand

POWER SPECIFICATIONS

DRIVER SERIES WIRING	350mA Constant Current (Remote)
DRIVER PARALLEL WIRING	12VAC (Integral) Remote 12V Transformer Required 24VDC (Integral) Remote 24V Driver Required


PRODUCT CODES (SERIES WIRING)

BLACK	128-M1WFRABK30
COPPER	128-M1WFRC30
STAINLESS STEEL	128-M1WFRS30

PARALLEL WIRING AVAILABLE UPON REQUEST

SERIES WIRING

INPUT 240VAC OUTPUT DC Constant Current



PARALLEL WIRING

INPUT 240VAC OUTPUT 12VAC | 24VDC

