



radiantlighting®

MODUX 2 & 4 SPIKE SPOT

By LuxR


OUTDOOR

The M2 & M4 Spike Spots are a low-voltage dimmable outdoor spot light with a solid metal spike for installing into garden soil. The fully adjustable spot light is precision machined in marine grade 316 stainless steel, copper or powdercoated aluminium, the luminaire achieves IP68 water ingress rating for peace of mind.

PROJECT

TYPE

NOTES

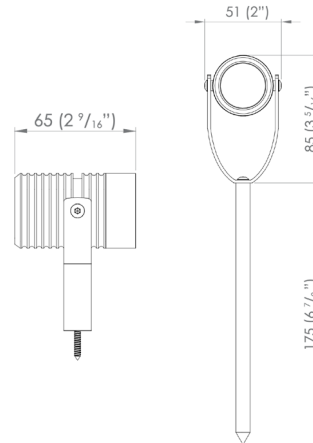

GENERAL SPECIFICATIONS

LED	2 W 4 W
LUMENS	170 Lm 360 Lm
EFFICACY	85 Lm / W 90 Lm / W
COLOUR TEMPERATURE	2700K 3000K 4000K
MATERIAL	Natural Copper 316 Stainless Steel Powder Coated Aluminium
FINISH	Black, Copper, Stainless Steel
BEAM	MODUX 2: 8°, 26°, 36°, 74°, 15°+40° Oval MODUX 4: 12°, 26°, 36°, 74°, 15°+40° Oval
CRI	90+
IP	68
WARRANTY	10 Years: Copper & Stainless Steel 5 Years: Electronics & Aluminium
ORIGIN	New Zealand

POWER SPECIFICATIONS

DRIVER SERIES WIRING	700mA Constant Current (Remote)
DRIVER PARALLEL WIRING	12VAC (Integral) Remote 12V Transformer Required 24VDC (Integral) Remote 24V Driver Required


PRODUCT CODES (SERIES WIRING)

M2 BLACK	128-M2SPRABK7430BS
M2 COPPER	128-M2SPRC7430BS
M2 STAINLESS STEEL	128-M2SPRS7430BS
M4 BLACK	128-M4SPRABK7430BS
M4 COPPER	128-M4SPRC7430BS
M4 STAINLESS STEEL	128-M4SPRS7430BS

PARALLEL WIRING AVAILABLE UPON REQUEST


SERIES WIRING

INPUT 240VAC OUTPUT DC Constant Current

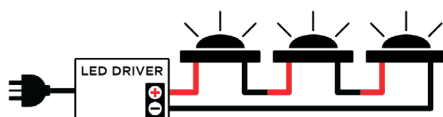

PARALLEL WIRING

INPUT 240VAC OUTPUT 12VAC | 24VDC

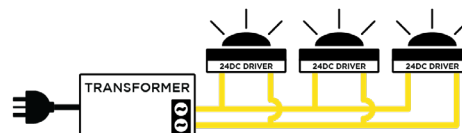

PERTH
+61 08 9240 1008
sales@radiantlighting.com.au

SYDNEY
1300 438 609
sales@radiantlighting.com.au

MELBOURNE
1300 438 609
sales@radiantlighting.com.au

BRISBANE
1300 438 609
sales@radiantlighting.com.au