



radiantlighting®

## MODUX 2 & 4 SURFACE MOUNTED SPOTLIGHT

By LuxR


OUTDOOR

The M2 & M4 Surface Mounted Spotlights are a very small low-voltage dimmable outdoor spot light on a stiff metal bracket for installing onto any surface with a < 4mm diameter screw.

### PROJECT

TYPE

NOTES

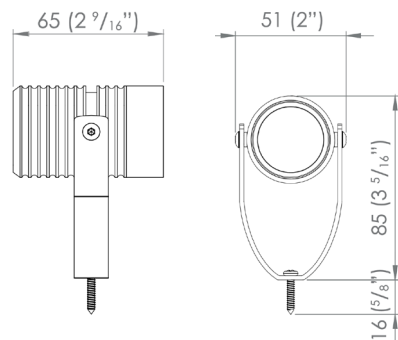


### GENERAL SPECIFICATIONS

LED	2 W   4 W
LUMENS	170 Lm   360 Lm
EFFICACY	85 Lm / W   90 Lm / W
COLOUR TEMPERATURE	2700K   3000K   4000K
MATERIAL	Natural Copper 316 Stainless Steel Powder Coated Aluminium
FINISH	Black, Copper, Stainless Steel
BEAM	MODUX 2: 8°, 26°, 36°, 74°, 15°+40° Oval MODUX 4: 12°, 26°, 36°, 74°, 15°+40° Oval
CRI	90+
IP	68
WARRANTY	10 Years: Copper & Stainless Steel 5 Years: Electronics & Aluminium
ORIGIN	New Zealand

### SERIES WIRING

INPUT 240VAC OUTPUT DC Constant Current



### POWER SPECIFICATIONS

DRIVER SERIES WIRING	700mA Constant Current (Remote)
DRIVER PARALLEL WIRING	12VAC (Integral) Remote 12V Transformer Required 24VDC (Integral) Remote 24V Driver Required


### PRODUCT CODES (SERIES WIRING)

M2 BLACK	128-M2SPRABK7430
M2 COPPER	128-M2SPRC7430
M2 STAINLESS STEEL	128-M2SPRS7430
M4 BLACK	128-M4SPRABK7430
M4 COPPER	128-M4SPRC7430
M4 STAINLESS STEEL	128-M4SPRS7430

PARALLEL WIRING AVAILABLE UPON REQUEST

### PARALLEL WIRING

INPUT 240VAC OUTPUT 12VAC | 24VDC

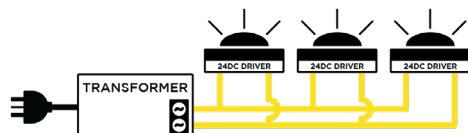

PERTH  
+61 08 9240 1008  
sales@radiantlighting.com.au

SYDNEY  
1300 438 609  
sales@radiantlighting.com.au

MELBOURNE  
1300 438 609  
sales@radiantlighting.com.au

BRISBANE  
1300 438 609  
sales@radiantlighting.com.au