



radiantlighting®

MODUX 2 DARKLIGHTER

By LuxR


OUTDOOR

The Modux Two Darklighter is a low-voltage dimmable outdoor uplighter typically producing 170 lumens. Precision machined in 316 stainless steel, copper or powdercoated aluminium, the luminaire achieves IP68 water ingress rating for peace of mind. The Cree 2 watt max LED can be easily replaced if required or substituted for a colour LED.

PROJECT

TYPE

NOTES

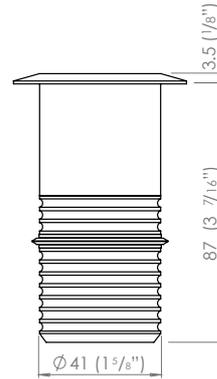

GENERAL SPECIFICATIONS

| | |
|--------------------|--|
| LED | 2 W |
| LUMENS | 190 Lm |
| EFFICACY | 85 Lm / W |
| COLOUR TEMPERATURE | 2700K / 3000K / 4000K |
| MATERIAL | Natural Copper 316 Stainless Steel Powder Coated Aluminium |
| FINISH | Copper, Stainless Steel, Black, Bronze, White |
| BEAM | 26° |
| CRI | 90+ |
| IP | 68 |
| WARRANTY | 10 Years: Stainless Steel & Copper 5 Years: Aluminium & Electronics |
| ORIGIN | New Zealand |

POWER SPECIFICATIONS

| | |
|------------------------|---|
| DRIVER SERIES WIRING | 700mA Constant Current (Remote) |
| DRIVER PARALLEL WIRING | 12VAC (Integral) Remote 12V Transformer Required 24VDC (Integral) Remote 24V Driver Required |


PRODUCT CODES (SERIES WIRING)

CODES AVAILABLE UPON REQUEST

PARALLEL WIRING AVAILABLE UPON REQUEST

SERIES WIRING

INPUT 240VAC OUTPUT DC Constant Current



PARALLEL WIRING

INPUT 240VAC OUTPUT 12VAC | 24VDC

