



radiantlighting®

MODUX 2 & 4 HANGING LITE

By LuxR


SUSPENSION / OUTDOOR

The Modux Two & Four hanging lights are designed to be suspended from a ceiling or trees to provide downwards illumination or a dynamic moon lighting effect. Includes a stainless steel cable at 1m or 3m lengths.

PROJECT

TYPE

NOTES

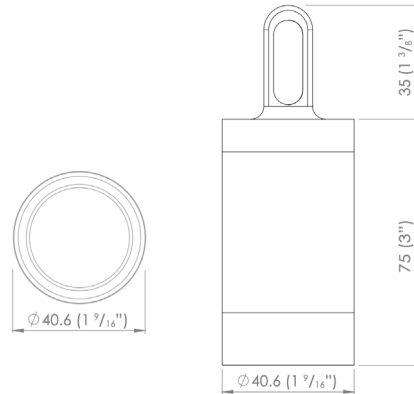

GENERAL SPECIFICATIONS

LED	2 W 4 W
LUMENS	170 Lm 360 Lm
EFFICACY	85 Lm / W 90 Lm / W
COLOUR TEMPERATURE	2700K 3000K 4000K
MATERIAL	Brass
FINISH	Brass
BEAM	MODUX 2: 8°, 26°, 36°, 74°, 15°+40° Oval MODUX 4: 12°, 26°, 36°, 74°, 15°+40° Oval
CRI	90+
IP	68
WARRANTY	10 Years: Brass 5 Years: Electronics
ORIGIN	New Zealand

POWER SPECIFICATIONS

DRIVER SERIES WIRING	700mA Constant Current (Remote)
DRIVER PARALLEL WIRING	12VAC (Integral) Remote 12V Transformer Required 24VDC (Integral) Remote 24V Driver Required


PRODUCT CODES (SERIES WIRING)

MODUX 2	128-M2HNGB7430
MODUX 4	128-M4HNGB7430

PARALLEL WIRING AVAILABLE UPON REQUEST

SERIES WIRING

INPUT 240VAC **OUTPUT** DC Constant Current



PARALLEL WIRING

INPUT 240VAC **OUTPUT** 12VAC | 24VDC

