



radiantlighting®

CLIC UP WALL

By LOMBARDO


OUTDOOR

Also suitable for outdoor use. Painted polycarbonate body and polycarbonate diffuser. Prepared for single power input. Silicone seals to maintain IP65 rating. A4 stainless steel hardware.

PROJECT

TYPE

NOTES

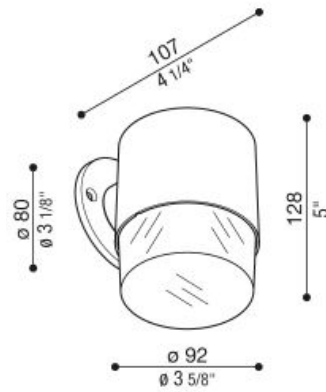

GENERAL SPECIFICATIONS

LED	LED Version: 5W / GU10 Version: 7.5W
LUMENS	LED Version: 600 Lm / GU10 Version: 435 Lm
EFFICACY	LED Version: 120 Lm/W GU10 Version: 58 Lm/W
COLOUR TEMPERATURE	3000K
MATERIAL	Anodised Aluminium Serigraphed Glass
FINISH	Black, Dark Grey, Green, Terracotta, White, Light Grey
BEAM	65°
IP	65
CRI	80
COLOUR DEVIATION	SDCM ≤2
WARRANTY	3 Years
ORIGIN	Italy

POWER SPECIFICATIONS

DRIVER	Integrated
VOLTAGE	AC DIRECT

PRODUCT CODES

BLACK	48-LL14812B3
DARK GREY	48-LL14812D3
GREEN	48-LL14812V3
TERRACOTTA	48-LL14812T3
WHITE	48-LL14812W3
LIGHT GREY	48-LL14812L3