

DODO 300

By LOMBARDO


OUTDOOR + WALL

Also suitable for outdoor use. Die-cast aluminium body; high resistance to oxidation thanks to cataphoresis treatment and UV-stabilised polyester resin painting. Transparent polycarbonate diffuser. Prepared for a single cable entry at the back. Supplied with accessories for adjusting the opening of the light beam. Silicone gaskets.

PROJECT

TYPE

NOTES

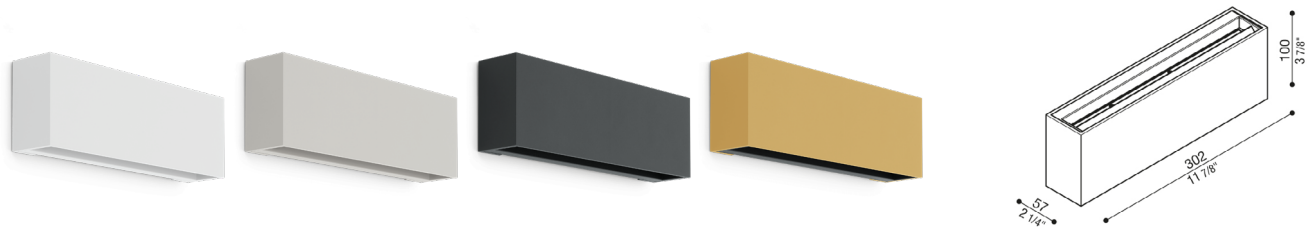

GENERAL SPECIFICATIONS

LED	20 W
LUMENS	2900 Lm
EFFICACY	145 Lm / W
COLOUR TEMPERATURE	2700K / 3000K / 4000K
MATERIAL	Die-Cast Aluminium, Polycarbonate Diffuser
FINISH	White, Light Grey, Dark Grey, Gold
CRI	80+
IP	54
IK RATING	10 20J xx9
WARRANTY	5 Years
ORIGIN	Italy

POWER SPECIFICATIONS

DRIVER	Integrated, 220-240V
DIMMING	N/A
VOLTAGE	220-240V

PRODUCT CODES

WHITE, 3000K	48-LL14305W3
LIGHT GREY, 3000K	48-LL14305L3
DARK GREY, 3000K	48-LL14305D3
GOLD, 3000K	48-LL14305Z3
WHITE, 4000K	48-LL14305W4
LIGHT GREY, 4000K	48-LL14305L4
DARK GREY, 4000K	48-LL14305D4
GOLD, 4000K	48-LL14305Z4

2700K CODES ARE AVAILABLE UPON REQUEST