



radiantlighting®

PIN T ASYMMETRICAL

By LOMBARDO


WALL

Suitable for indoor and outdoor use. Body made of EN - AB44100 die-cast aluminum primary alloy; highly resistant to oxidization due to cataphoresis treatment. Heat tempered and silk-screen printed glass diffuser. Inaccessible device, provided with 0.20 m of prewired power cable H05RN-F with epoxy resin treatment. Dimmable Phase cut.

PROJECT

TYPE

NOTES

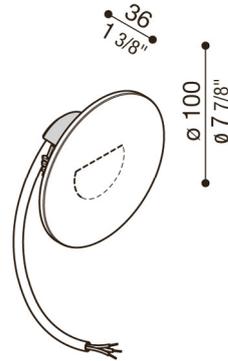

GENERAL SPECIFICATIONS

LED	2 W
LUMENS	67 Lm
EFFICACY	33.5 Lm / W
COLOUR TEMPERATURE	2700K / 3000K / 4000K
MATERIAL	Die-Cast Aluminium
FINISH	Neutral, Black, Grey, Corten
CRI	80+
IP	66
IK RATING	07 2J xx5
WARRANTY	3 Years
ORIGIN	Italy

POWER SPECIFICATIONS

DRIVER	Integrated, 220-240V
DIMMING	Phase-Cut
VOLTAGE	220-240V
POWER CABLE	Supplied with 0.2m pre-wired H05RN-F

PRODUCT CODES

NEUTRAL, 3000K	48-LL1250043
BLACK, 3000K	48-LL1250053
GREY, 3000K	48-LL1250063
CORTEN, 3000K	48-LL1250073
NEUTRAL, 4000K	48-LL1250044
BLACK, 4000K	48-LL1250054
GREY, 4000K	48-LL1250064
CORTEN, 4000K	48-LL1250074

2700K CODES ARE AVAILABLE UPON REQUEST