

STILE NEXT 506L ASYMMETRIC

By **LOMBARDO**


WALL

Suitable for indoor and outdoor use. Body made of EN-AB44100 die-cast aluminium primary alloy; highly resistant to oxidization thanks to the zirconium-based passivation treatment and UV stabilized polyester resin coating. Heat tempered and serigraphed glass diffuser. Silicone gaskets. A4 or AISI 316 L stainless steel nuts and bolts. Patented model.

PROJECT

TYPE

NOTES

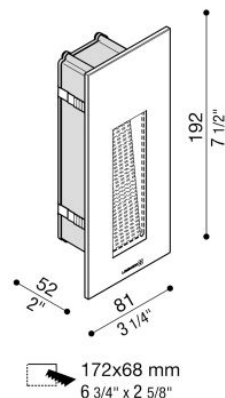

GENERAL SPECIFICATIONS

LED	3 W
LUMENS	38 Lm
EFFICACY	12.6 Lm / W
COLOUR TEMPERATURE	3000K / 4000K
MATERIAL	Aluminium, Serigraphed Glass
FINISH	White
BEAM	N/A
IP	66
CRI	80
IK	06 IJ xx3
WARRANTY	3 Years
ORIGIN	Italy

POWER SPECIFICATIONS

DRIVER	Integrated Power Supply
LED	220-240 V

PRODUCT CODES

3000K	48-LL663C3
4000K	48-LL663CN