

FAZE

2021/22 SURFACE MOUNTED COLLECTION



Surface Mounted

Surface mounted fittings have been a key piece of lighting design for decades. Their immense design value lies in their flexibility, since they can be installed in almost any space without dramatically altering the ceiling or wall.

Contents

- 4 Our Surface Mounted Collection Key Features
- 35 Surface Mounted Specifications

Product Contents



Core 6
Specifications 35



Core Adjustable 70 6
Specifications 35



Core Adjustable 95 6
Specifications 36



Split 12
Specifications 36




Kani 16
Specifications 37



Vita Fixed 20
Specifications 37



Vita 20
Specifications 38



Silo 40 24
Specifications 38



Silo 60 24
Specifications 39



Luxe Circle 28
Specifications 39



Luxe Long 28
Specifications 40



Lucid T 270 32
Specifications 40



Lucid T 350 32
Specifications 41



Our Surface Mounted Collection Key Features




Quick Connections

Our entire surface mounted collection has been designed for ease and simplicity. This includes effortless wiring systems and specialised quick connect canopies for a faster installation process.



Variety

With numerous styles and finishes, incorporating different fascia and baffle options, our surface mounted collection ensures versatility with each and every fitting.

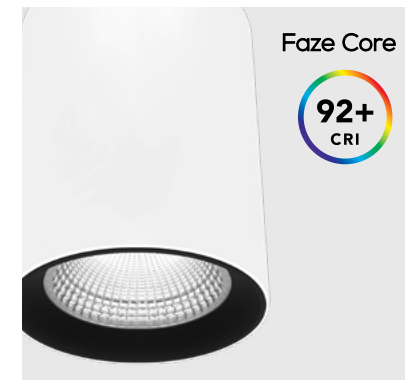

90+ Colour Rendering

A high CRI is crucial when designing any lighting plan, from residential to commercial, as it will ensure that all of the architectural features in your space are enhanced exceptionally. The 90+ CRI of our surface mounted fittings are a perfect example of this, as they will enhance the details in stone countertops, the rich colouring of hardwood floors and everything in between.




Enhancements and Additions

This luminaire family has undergone significant enhancements since our 2020 collection. This includes CRI advancements in the Luxe series, added variants to the Core series, as well as a completely new decorative fitting; the Kani.



Core


The Core simultaneously creates a stylish feature whilst also providing sufficient task lighting. This makes it ideal for areas with limited ceiling space.



Core

LED 12W
Lumens 1015 lm (3000K)
1090 lm (4000K)


W Ø95mm
H 150mm



Core Adjustable 70

LED 15W
Lumens 1300 lm (3000K)
1420 lm (4000K)

W Ø70mm
H 125mm
Canopy Height 30mm




Core Adjustable 95

LED 20W
Lumens 1850 lm (3000K)
1920 lm (4000K)

W Ø95mm
H 150mm
Canopy Height 30mm

Finishes

- Powder Coated Black
- Powder Coated White

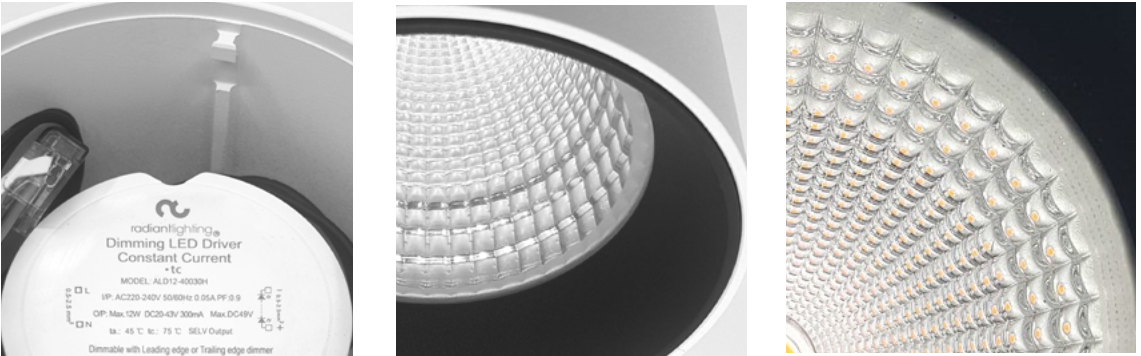

Deep-set Built In Dimmable Driver

Both the Core and Core Adjustable feature a built in driver, for ease of installation and seamless design.





Refined Black Baffle

A slim black baffle design, for visual comfort and reduced glare.



High Quality Reflector

For better light distribution and performance.

Core Adjustable 70 and 95 Beam Options

Beam	60°	Additional Reflector Options	15°	24°	36°
					

Core Beam Options

Beam	60°	Additional Reflector Options	36°
			

Lens Options

Honeycomb Lens

Baffle Options

- Powder Coated Black (Standard)
- Powder Coated White
- Powder Coated Gold

***Core Adjustable series only.**

Flicker Free

*Not applicable to the Core Adjustable 70 and Core Adjustable 95.

CRI 92+


Casambi Bluetooth Compatible

DIMMABLE

Core

Quick Connection System


The Core features a unique quick connection system, which has been designed for durability and easy installation.

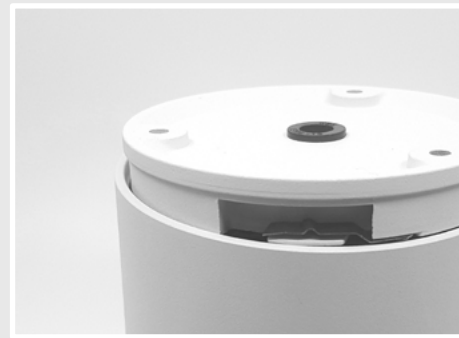

Core Adjustable

Built in Driver

With built in, phase cut dimming, the Core Adjustable has the added benefit of simple installation.




The circular driver is built in to reduce installation time



Refined and Developed

The Core has been designed as a more simplistic fitting. With a higher lumen output, enhanced connection system and superior materials; the Core is a significant advancement in our surface mounted collection.




Hidden mounting plate/screws for a clean design.

Reduced size, less bulky.

Reduced baffle, higher lumen output.

Versatile

The Core is also available as a suspended and track mounted fitting.

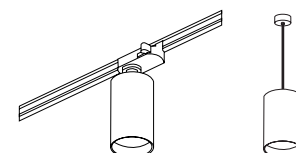


90° Tilt, 350° Rotation

Rotatable, flexible and dimmable; the Core Adjustable is the perfect light to meet all of your needs. Whether it be accent, task or ambient lighting, it is ideal as a bedside reading light, for highlighting artwork, or simply creating ambience.




Slimline Canopy

Designed with a minimalistic approach, this canopy suits any modern space with its clean and simple lines.

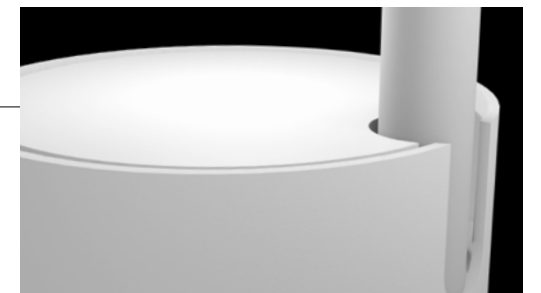

Unique Adjustable/Rotating Canopy

A unique canopy and hinge design that allows the Core Adjustable to be tilted up to 90° and rotated up to 350°.

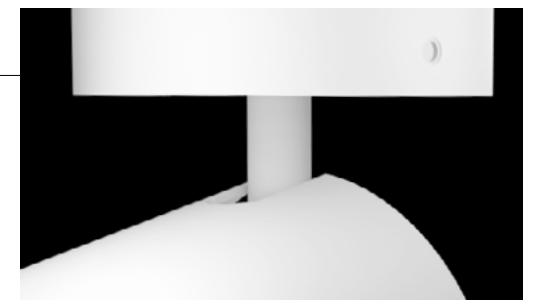



Featured Fitting

In this project, the Core has been used as a decorative alternative to downlights over the kitchen island. With the ability to be dimmed, it is not only perfect for task lighting but can also be adjusted to suit your needs.

Core




Split

Highly adaptable, the Faze Split is the perfect design solution. Paired together or used individually, the Split has a modern design aesthetic that fits seamlessly into any interior space.



Split

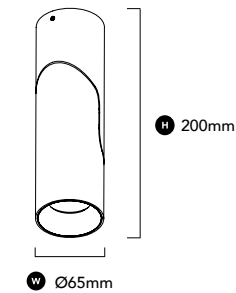

LED	12W
Lumens	1070 lm (3000K) 1123 lm (4000K)

Adjustable and Rotatable

The Split achieves both accent and task lighting due to its innovative rotating components.



Tilt
of up to 60°

Rotation
of up to 350°

Modern and Versatile Design

The Split was designed to be as versatile as possible, whilst still retaining a stylish aesthetic.

Discreet Lock-In Mount

The lock-in screws on the Split are discreet, complementing its minimalistic design.




Geometric Lines

The hinge design on the Split uses a geometric outline to suit any space it is used in.

Slim Design with Powder Coated Finish

A slim profile design and a powder coated finish once again assists the Split in retaining its modern appeal.



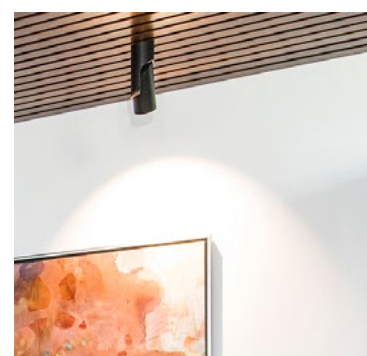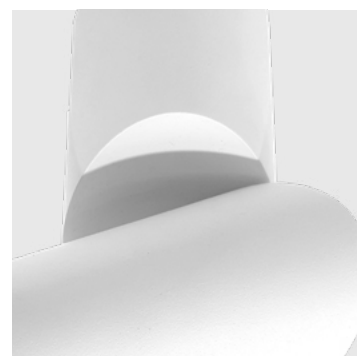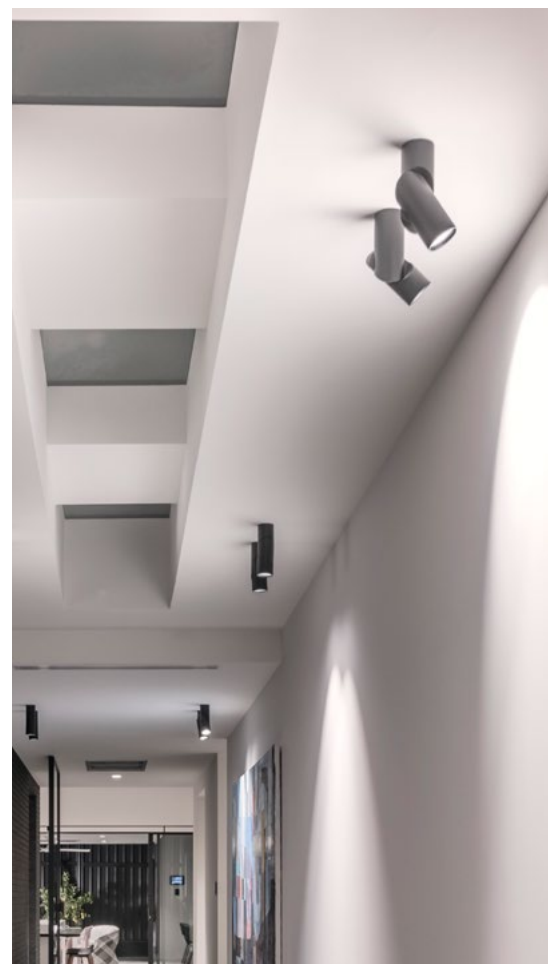

Cutting Edge Design


The Split has been designed with a slim, sharp profile to suit any modern living space.

High Lumen Output (per watt)

As the Split is manufactured with the highest quality components, the light emission reflects this; with a lumen output per watt of 89, that is exceptionally high for its class.

Built in Phase-cut Dimming

Featuring a built in dimmer, the Split allows for an easy and seamless installation.

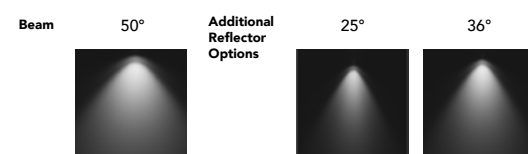

Finishes
 Powder Coated Black
 Powder Coated White



Casambi Bluetooth Compatible


Baffle Finishes

Powder Coated Black (Standard)
 Powder Coated White
 Powder Coated Gold



Featured Fitting

Minimalistic in design, the Split achieves both accent and task lighting in this project, due to its innovative tilting capabilities.



Split






Kani

The Kani is our latest surface mounted luminaire. With simple and decorative styling in mind, the Kani functions as both a practical and aesthetic light fixture.



Kani

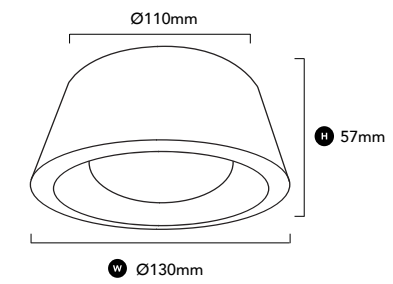

LED 15W
Lumens 1050 lm (3000K)
 1100 lm (4000K)

A New Decorative Addition

The Kani brings a new era of elegance to our surface mounted collection.



Specialised Optic Lens

With a convex optic glass lens, the Kani can emit light of up to 1050 lumens.



240V Dimmable LED Chip

Featuring a 240V LED chip, the Kani doesn't require a driver. This makes installation a breeze and results in a slim profile design.



Interchangeable Baffle


The Kani encompasses interchangeable baffles, available in 3 finishes.

- Baffle Finishes**
- Powder Coated Black (Standard)
 - Powder Coated White
 - Powder Coated Gold



Seamless Ceiling Mount

The Kani's ceiling application is seamless, with no visible mounting screws or gaps.

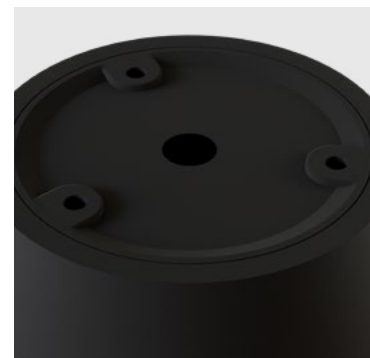


Quick Connection Canopy

The Kani has a quick connection system, which allows for simple installation to the ceiling.




Slim Profile Design

The Kani has a slim, low profile design, with clean lines and a modern aesthetic.



Casambi Bluetooth Compatible

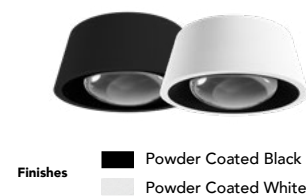

Finishes

- Powder Coated Black
- Powder Coated White



Featured Fitting

Pictured here is the Kani, with a black finish and white baffle, for maximum illumination.



Kani



Vita



The Vita is sleek and versatile in design and fits seamlessly into both residential and commercial interior spaces. The flexibility of the Vita ensures unlimited design opportunities.



Vita Fixed


LED 12W
Lumens 1140 lm (3000K)
 1180 lm (4000K)

SIDE VIEW

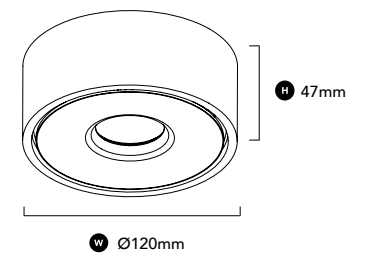


Vita

LED 12W
Lumens 1140 lm (3000K)
 1180 lm (4000K)

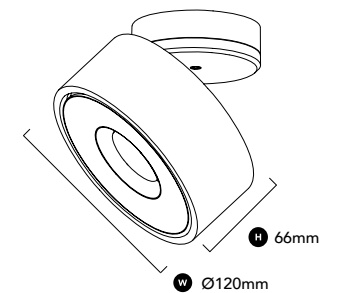

Finishes
 Powder Coated Black
 Powder Coated White



Please note:
 This fitting is also available as a track mount.



Vita Fixed

Interchangeable Magnetic Snap-Lock Fascia



The Vita embodies a snap-lock front fascia, which is available in 3 different finishes. This allows for customisation to complement any interior space.

- Fascia Finishes**
- Powder Coated Black
 - Powder Coated White
 - Powder Coated Gold



Revolutionary Hinge Design

The Vita features a revolutionary hinge design, allowing a 90° tilt and 350° rotation, all in one smooth motion.

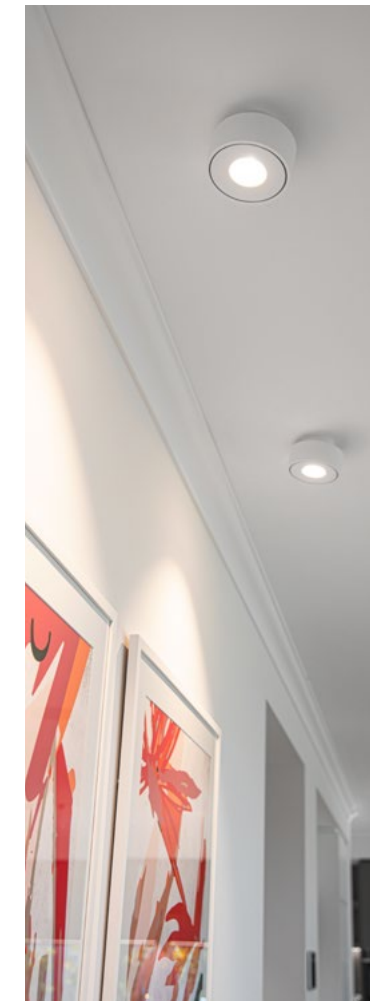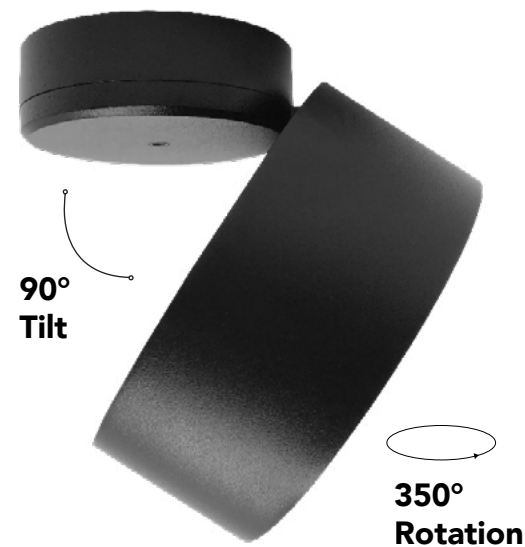

Quick Connection System

The Vita has a quick connection system which means that when the electrician installs the base plate, the fitting then just snaps into place. From then on, the fitting is tool free.



High Lumen Output

The Vita showcases some of the highest lumen output readings of its class, with an output of 1180+ lumens.



Specially Designed Circular Driver

The Vita showcases a unique circular driver with a power factor of 0.95. Fully dimmable and specially designed for the Vita's circular shape, this is one of the most efficient drivers available.






Silo Surface

The Silo Surface has a simple yet adaptable design, providing endless design opportunities. With various heights and diameters available, the Silo Surface allows you to channel your inner creative and design a custom look that is unique to your project.



Silo Surface 40


LED 6W
Lumens 520 lm (3000K)
520 lm (4000K)

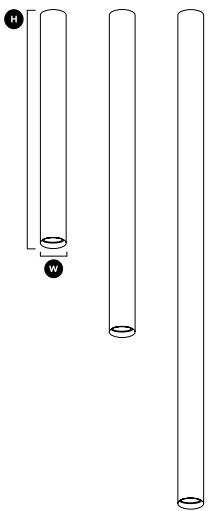

Ø40mm, 3 Heights Available			
Height (H)	280mm	380mm	580mm
Width (W)	Ø40mm	Ø40mm	Ø40mm

Silo Surface 60


LED 12W
Lumens 1080 lm (3000K)
1080 lm (4000K)

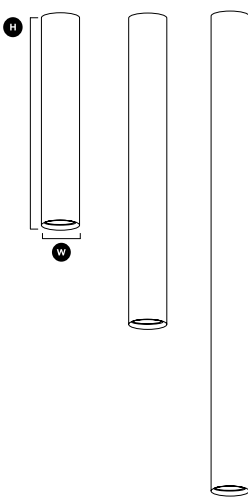

Ø60mm, 3 Heights Available			
Height (H)	280mm	380mm	580mm
Width (W)	Ø60mm	Ø60mm	Ø60mm

Quick Connection System

The quick connection system is designed for ease and simplicity, allowing a swift and effortless installation. This results in a seamless final product that adds to the design aesthetic of the fitting.

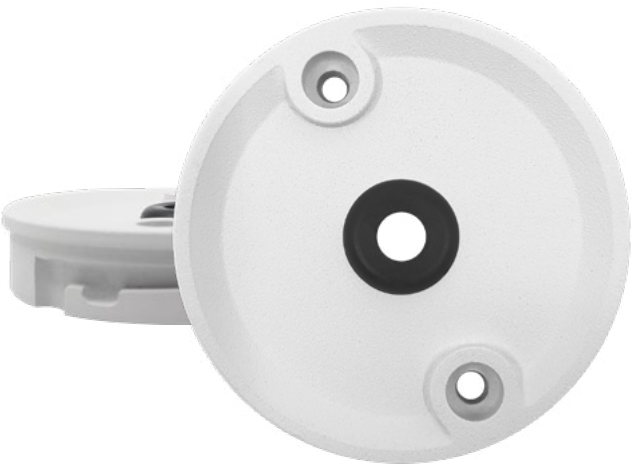

Cultivated Lens Innovation

The Silo Surface features the latest in lens technology, helping to guide virtually every ray of light emitted by the LED. The lens improves the efficiency of the fitting, enhances visual comfort and dramatically reduces glare.



Deep-Set Black Baffle

The Silo Surface incorporates a deep-set black baffle, which reduces glare and enhances visual comfort.





Citizen LEDs for High Lumen Output

The Silo Surface has an output of 1100 lumens, making it one of the best in its class.




Slim, Modern Design

The Silo Surface is designed with modern aesthetics in mind. It was created as a contemporary alternative to downlights, perfect over a kitchen island or dining table.

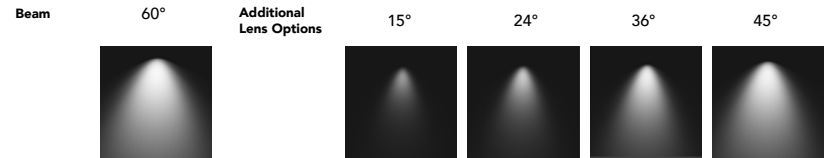


Infinite Design Options

With various heights and widths at hand, the Silo Surface creates a unique lighting feature when installed as a cluster.

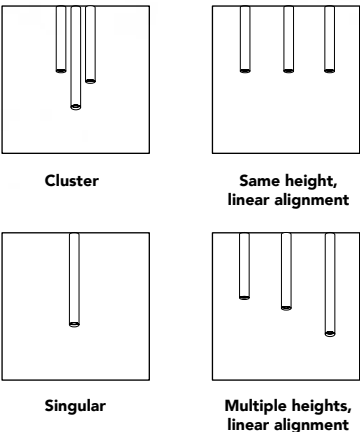

Designed for Versatility

The Silo Surface series has been strategically designed to produce the best possible light, whilst also being durable, sustainable and stylish. Available in 5 different beam angles, it is the perfect choice for accent lighting.

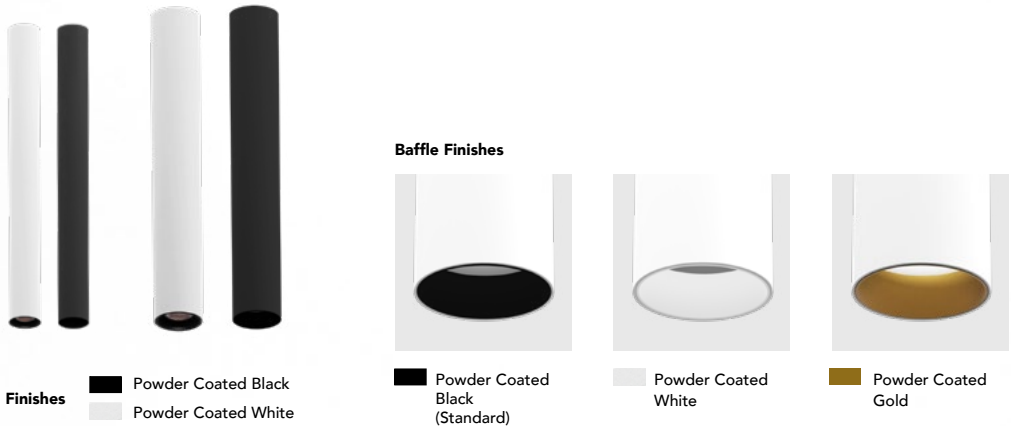




Luxe

Architectonic and balanced, the Luxe series combines advanced LED technology with a refined, contemporary aesthetic.


The Luxe series has been revamped and redesigned with a higher CRI and more wattage options.




Luxe Circle

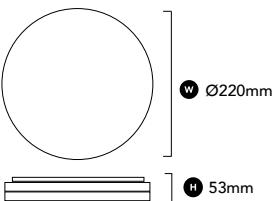


LED	15W / 10W
Lumens	15W 1570 lm (3000K) 15W 1620 lm (4000K) 10W 1070 lm (3000K) 10W 1170 lm (4000K)

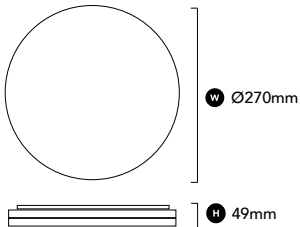


LED	24W / 18W
Lumens	24W 2455 lm (3000K) 24W 2640 lm (4000K) 18W 1885 lm (3000K) 18W 2010 lm (4000K)

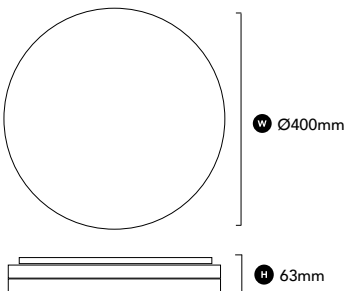


LED	38W / 29W
Lumens	38W 3860 lm (3000K) 38W 4090 lm (4000K) 29W 3020 lm (3000K) 29W 3215 lm (4000K)



Luxe Long

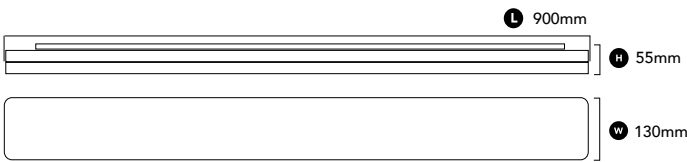

LED	32W/24W	Lumens	32W 3200 lm (3000K) 32W 3360 lm (4000K) 24W 2400 lm (3000K) 24W 2520 lm (4000K)
------------	---------	---------------	--

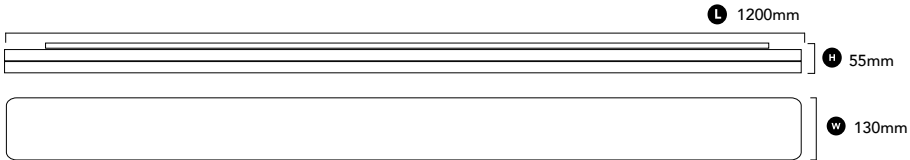

LED	38W/29W	Lumens	38W 3800 lm (3000K) 38W 3990 lm (4000K) 29W 2900 lm (3000K) 29W 3045 lm (4000K)
------------	---------	---------------	--



Dot Free Illumination

Precise positioning of the LEDs allows for seamless light distribution.


Increased CRI, 90+

With an increased CRI of 90 from 80, the Luxe series is now more advanced at enhancing colours than ever before.



Easy Installation

The Luxe series features quick releases and large wiring spaces for easy installation.

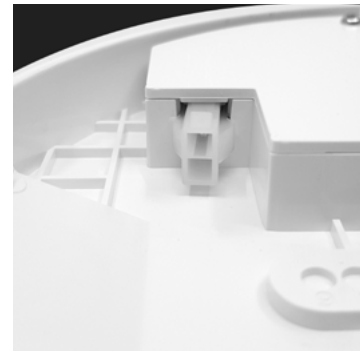


Integrated Drivers

All of the Luxe fittings feature 240V integrated drivers, allowing for straight forward installation.



Superior Polycarbonate Housing

Constructed with the best quality materials for the extended durability.



Suitable for wet areas and outdoors
*LUXE CIRCLE 400mm IP20



Casambi Bluetooth Compatible

Finishes

White Polycarbonate




* LUXE CIRCLE ONLY



Flicker Free

New Switchable Wattage and Easy Installation System

With the ability to now switch between wattages, and a much easier installation process, the Luxe Circle and Luxe Long are superior in efficiency.

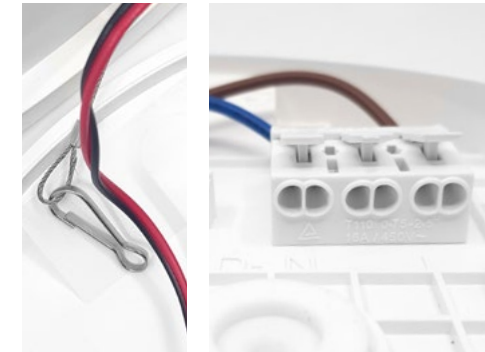


Quick Connection Clip and Wiring

With a hook to attach both ends while wiring and a simple clip connection, the Luxe Circle makes wiring trouble-free.



Quick Release

The Luxe Circle features two quick release push-in buttons on each side, making it easy to release when needed.

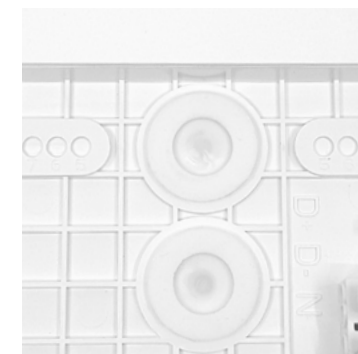

Multiple Cable Entry Points

To allow for easier installation.






Lucid T

The Lucid T series incorporates powerful illumination with advanced LED technology. Its modern and minimal design allows it to fit into any residential or commercial space.




Lucid T 270

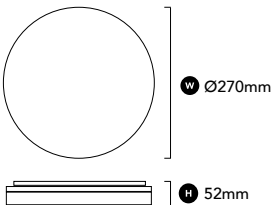

LED	24W / 18W
Lumens	24W 2625 lm (3000K) 24W 2625 lm (4000K) 18W 2060 lm (3000K) 18W 2060 lm (4000K)



Lucid T 350

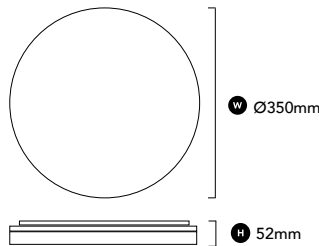

LED	29W
Lumens	3140 lm (3000K) 3140 lm (4000K)



Finishes	White Polycarbonate Black Polycarbonate
-----------------	--

Lucid T 270 is Interchangeable Between Wattages

The Lucid T 270 has been designed with versatility in mind; it's ability to swap between wattages with the flick of a switch allows for light manipulation on site.

Lucid T 270 set to 18W

Lucid T 270 set to 24W

UV Resistant, Polycarbonate Housing

The Lucid T series is constructed with the highest quality polycarbonate for an unmatched level of durability. As a result of this construction, these luminaires are UV resistant and will not rust.

This also gives the Lucid T series an IK rating of 10, ensuring protection against external impact.



New Finish Available


The Lucid T 270 and Lucid T 350 are now both available in a black finish.



Black Polycarbonate

Easy Installation System

The Lucid T has been designed with effortless installation in mind, its quick release system ensures a simple and fast application process.

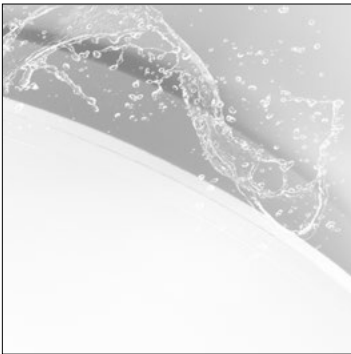

IP 54

With an IP rating of 54, the Lucid T series can be used in indoors, outdoors as well as in wet areas.




Integrated Dimmable Drivers

The Lucid T fittings feature integrated dimmable drivers, which allow for easy installation and smooth dimming.



Minimal Design Aesthetic

The Lucid T fittings incorporate a negative detail to enhance a minimal design aesthetic.



CRI 90+

IK10


DIMMABLE

IP54

Suitable for wet areas and outdoors


Flicker Free

Casambi Bluetooth Compatible



Quick Connection Clip and Wiring

With a hook to attach both ends during installation and the wiring itself being a simple clip connection, the Lucid T makes the application process simple.



Quick Release

The Lucid T features two quick release push-in buttons on either side, making it quick and easy to release.



Multiple Cable Entry

For easier installation.




Surface Mounted




34

Surface Mounted Specifications

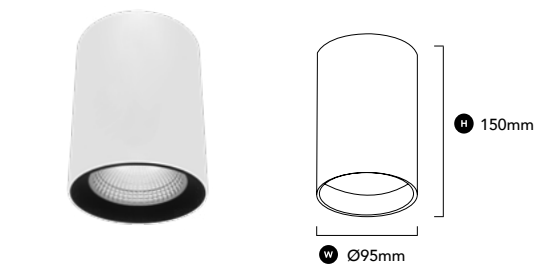


Core	
Product Code	
White, 3000K, 60°	118-COR12W603
White, 4000K, 60°	118-COR12W604
Black, 3000K, 60°	118-COR12B603
Black, 4000K, 60°	118-COR12B604
General Specifications	
LED	12W
Lumens	1015 lm (3000K) 1090 lm (4000K)
Efficacy	75 lm/w (3000K) 81 lm/w (4000K)
Colour	3000K, Warm White 4000K, Cool White
Material	Powder Coated Aluminium
Finish	White Black
Beam	36° 60°
CRI	92+
IP	20
Colour Deviation	SDCM ≤2
UGR	<17
Lifetime	>55,000hrs L80B10
Warranty	5 Years
Accessories	
36° Reflector	118-RFLCOR36
Black Baffle	118-CORBB
White Baffle	118-CORBW
Gold Baffle	118-CORBG
Driver Specifications	
Power	300mA 240V Built-in Flicker Free Driver
Dimming	Phase Cut Dimming
Power Factor	> 0.95
Remote DALI Dimming available upon request	

Compatible with remote Casambi CBU-TED Bluetooth Controllable Dimmer (71-CASCBU)

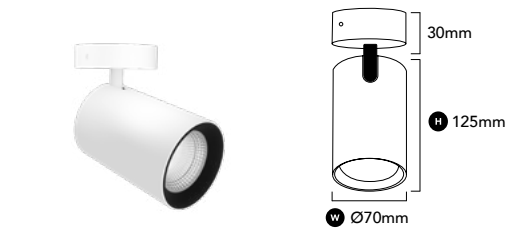


Core Adjustable 70	
Product Code	
White, 3000K, 60°	118-COAS12W603
White, 4000K, 60°	118-COAS12W604
Black, 3000K, 60°	118-COAS12B603
Black, 4000K, 60°	118-COAS12B604
General Specifications	
LED	15W
Lumens	1300 lm (3000K) 1420 lm (4000K)
Efficacy	86 lm/w (3000K) 94 lm/w (4000K)
Colour	3000K, Warm White 4000K, Cool White
Material	Powder Coated Aluminium
Finish	White Black
Beam	15° 24° 36° 60°
CRI	92+
IP	20
Colour Deviation	SDCM ≤2
UGR	<17
Lifetime	>55,000hrs L80B10
Warranty	5 Years
Accessories	
15° Reflector	118-RFLC7015
24° Reflector	118-RFLC7024
36° Reflector	118-RFLC7036
Black Baffle	118-COR70BB
White Baffle	118-COR70BW
Gold Baffle	118-COR70BG
Honeycomb Lens, Black Baffle	118-COR70HB
Honeycomb Lens, White Baffle	118-COR70HW
Honeycomb Lens, Gold Baffle	118-COR70HG
Driver Specifications	
Power	350mA 240V Built-in Dimmable Driver
Dimming	Phase Cut Dimming
Power Factor	> 0.95
Remote DALI Dimming available upon request	

Compatible with remote Casambi CBU-TED Bluetooth Controllable Dimmer (71-CASCBU)

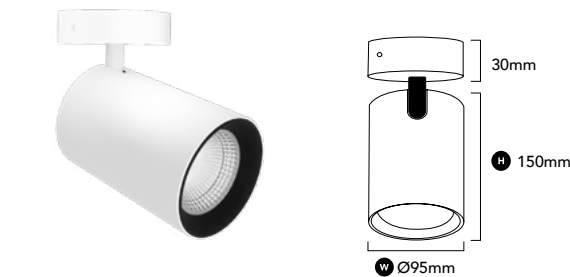

Core Adjustable 95	
Product Code	
White, 3000K, 60°	118-COAM18W603
White, 4000K, 60°	118-COAM18W604
Black, 3000K, 60°	118-COAM18B603
Black, 4000K, 60°	118-COAM18B604
General Specifications	
LED	20W
Lumens	1850 lm (3000K) 1920 lm (4000K)
Efficacy	92 lm/w (3000K) 96 lm/w (4000K)
Colour	3000K, Warm White 4000K, Cool White
Material	Powder Coated Aluminium
Finish	White Black
Beam	15° 24° 36° 60°
CRI	92+
IP	20
Colour Deviation	SDCM ≤2
UGR	<17
Lifetime	>55,000hrs L80B10
Warranty	5 Years
Accessories	
15° Reflector	118-RFLC9515
24° Reflector	118-RFLC9524
36° Reflector	118-RFLC9536
Black Baffle	118-COR95BB
White Baffle	118-COR95BW
Gold Baffle	118-COR95BG
Honeycomb Lens, Black Baffle	118-COR95HB
Honeycomb Lens, White Baffle	118-COR95HW
Honeycomb Lens, Gold Baffle	118-COR95HG
Driver Specifications	
Power	350mA 240V Built-in Dimmable Driver
Dimming	Phase Cut Dimming
Power Factor	> 0.95
Remote DALI Dimming available upon request	


Compatible with remote Casambi CBU-TED Bluetooth Controllable Dimmer (71-CASCBU)

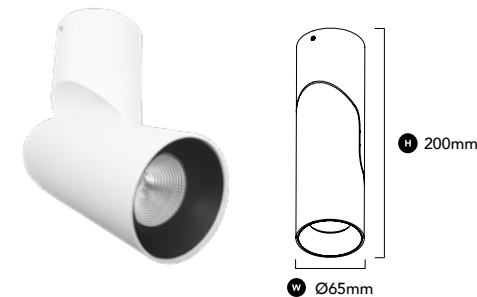

Split	
Product Code	
White, 3000K, 50°	83-SP12W503
White, 4000K, 50°	83-SP12W504
Black, 3000K, 50°	83-SP12B503
Black, 4000K, 50°	83-SP12B504
General Specifications	
LED	12W
Lumens	1070 lm (3000K) 1123 lm (4000K)
Efficacy	89 lm/w (3000K) 93 lm/w (4000K)
Colour	3000K, Warm White 4000K, Cool White
Material	Powder Coated Aluminium
Finish	White Black
Beam	25° 36° 50°
CRI	90+
IP	20
Colour Deviation	SDCM ≤3
UGR	<19
Lifetime	>55,000hrs L80B10
Warranty	5 Years
Accessories	
25° Reflector	83-RFL25
36° Reflector	83-RFL36
Honeycomb Lens	83-AIRH
Gold Baffle	83-SPLITRG
White Baffle	83-SPLITRW
Black Baffle	83-SPLITRB
Driver Specifications	
Power	350mA 240V Built-in Driver
Dimming	Phase Cut Dimming
Power Factor	> 0.90
Remote DALI Dimming available upon request	


Compatible with remote Casambi CBU-TED Bluetooth Controllable Dimmer (71-CASCBU)



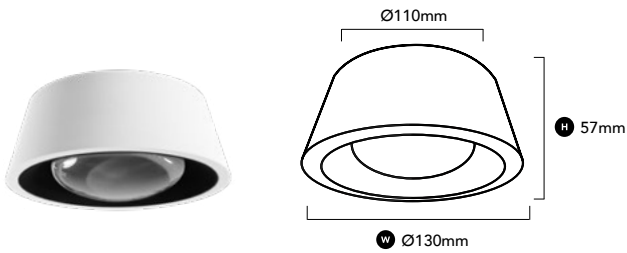


Kani	
Product Code	
Black, 3000K, 75°	118-KAN15B753
Black, 4000K, 75°	118-KAN15B754
White, 3000K, 75°	118-KAN15W753
White, 4000K, 75°	118-KAN15W754
General Specifications	
LED	15W
Lumens	1050 lm (3000K) 1100 (4000K)
Efficacy	70 lm/w (3000K) 70 lm/w (4000K)
Colour	3000K, Warm White 4000K, Cool White
Material	Powder Coated Aluminium Glass
Finish	Black White
Beam	75°
CRI	92+
IP	20
Colour Deviation	SDCM ≤3
Lifetime	>55,000hrs L80B10
UGR	<21
Warranty	3 Years
Accessories	
White Fascia	118-KANRW
Gold Fascia	118-KANRG
Black Fascia	118-KANRB
Power Specifications	
Power	240V COB LED (No Driver)
Dimming	Phase Cut Dimming

Compatible with remote Casambi CBU-TED Bluetooth Controllable Dimmer (71-CASCBU)

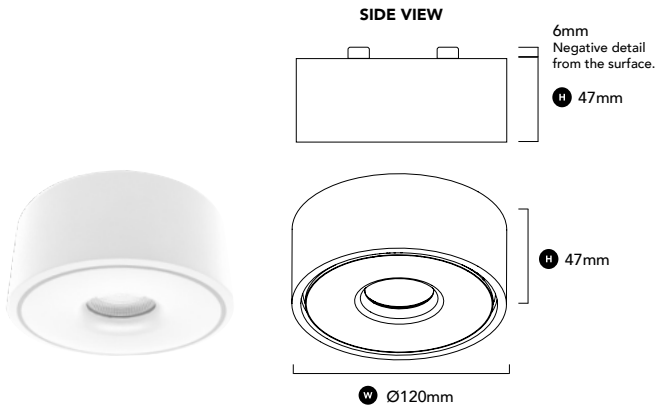


Vita Fixed	
Product Code	
White, 3000K, 50°	83-VITAF12W503
White, 4000K, 50°	83-VITAF12W504
Black, 3000K, 50°	83-VITAF12B503
Black, 4000K, 50°	83-VITAF12B504
General Specifications	
LED	12W
Lumens	1140 lm (3000K) 1180 lm (4000K)
Efficacy	95 lm/w (3000K) 98 lm/w (4000K)
Colour	3000K, Warm White 4000K, Cool White
Material	Powder Coated Aluminium
Finish	White Black
Beam	25° 36° 50°
CRI	90+
IP	20
Colour Deviation	SDCM ≤3
UGR	<19
Lifetime	>55,000hrs L80B10
Warranty	5 Years
Accessories	
25° Reflector	83-RFL25
36° Reflector	83-RFL36
Black Fascia	83-VITABLACK
Gold Fascia	83-VITAGOLD
White Fascia	83-VITAWHITE
Driver Specifications	
Power	350mA 240V Built-In Driver
Dimming	Phase Cut Dimming
Power Factor	> 0.95

Compatible with remote Casambi CBU-TED Bluetooth Controllable Dimmer (71-CASCBU)

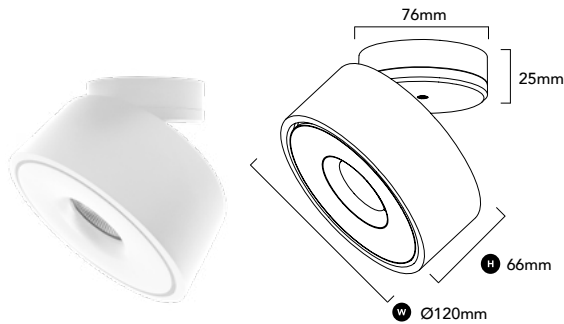

Vita	
Product Code	
White, 3000K, 50°	83-VITAA12W503
White, 4000K, 50°	83-VITAA12W504
Black, 3000K, 50°	83-VITAA12B503
Black, 4000K, 50°	83-VITAA12B504
General Specifications	
LED	12W
Lumens	1140 lm (3000K) 1180 lm (4000K)
Efficacy	95 lm/w (3000K) 98 lm/w (4000K)
Colour	3000K, Warm White 4000K, Cool White
Material	Powder Coated Aluminium
Finish	White Black
Beam	25° 36° 50°
CRI	90+
IP	20
Colour Deviation	SDCM ≤3
UGR	<19
Lifetime	>55,000hrs L80B10
Warranty	5 Years
Accessories	
25° Reflector	83-RFL25
36° Reflector	83-RFL36
Black Fascia	83-VITABLACK
Gold Fascia	83-VITAGOLD
White Fascia	83-VITAWHITE
Driver Specifications	
Power	350mA 240V Built-In Driver
Dimming	Phase Cut Dimming
Power Factor	> 0.95

Compatible with remote Casambi CBU-TED Bluetooth Controllable Dimmer (71-CASCBU)

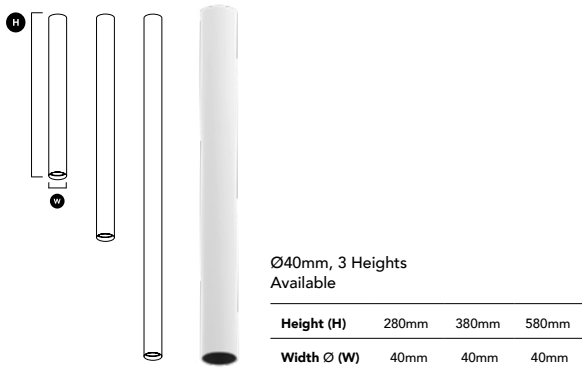

Silo 40 Surface	
Product Code	
280, White, 3000K, 60°	118-SIS42806W603
280, White, 4000K, 60°	118-SIS42806W604
280, Black, 3000K, 60°	118-SIS42806B603
280, Black, 4000K, 60°	118-SIS42806B604
380, White, 3000K, 60°	118-SIS43806W603
380, White, 4000K, 60°	118-SIS43806W604
380, Black, 3000K, 60°	118-SIS43806B603
380, Black, 4000K, 60°	118-SIS43806B604
580, White, 3000K, 60°	118-SIS45806W603
580, White, 4000K, 60°	118-SIS45806W604
580, Black, 3000K, 60°	118-SIS45806B603
580, Black, 4000K, 60°	118-SIS45806B604
General Specifications	
LED	6W
Lumens	520 lm (3000K) 520 lm (4000K)
Efficacy	79 lm/w (3000K) 77 lm/w (4000K)
Colour	3000K, Warm White 4000K, Cool White
Material	Powder Coated Aluminium
Finish	White Black
Beam	15° 24° 36° 45° 60°
CRI	92+
IP	20
Colour Deviation	SDCM ≤2
UGR	<15
Lifetime	>55,000hrs L80B10
Warranty	5 Years
Accessories	
15° Lens	118-SIL4015
24° Lens	118-SIL4024
36° Lens	118-SIL4036
45° Lens	118-SIL4045
Black Baffle	118-SIL40BB
Gold Baffle	118-SIL40BG
White Baffle	118-SIL40BW
Driver Specifications	
Power	150mA 240V Built-In Flicker Free Dimmable Driver
Dimming	Phase Cut Dimming
Power Factor	> 0.90
Remote DALI Dimming available upon request	


Compatible with remote Casambi CBU-TED Bluetooth Controllable Dimmer (71-CASCBU)






Silo 60 Surface	
Product Code	
280, White, 3000K, 60°	118-SIS62812W603
280, White, 4000K, 60°	118-SIS62812W604
280, Black, 3000K, 60°	118-SIS62812B603
280, Black, 4000K, 60°	118-SIS62812B604
380, White, 3000K, 60°	118-SIS63812W603
380, White, 4000K, 60°	118-SIS63812W604
380, Black, 3000K, 60°	118-SIS63812B603
380, Black, 4000K, 60°	118-SIS63812B604
580, White, 3000K, 60°	118-SIS65812W603
580, White, 4000K, 60°	118-SIS65812W604
580, Black, 3000K, 60°	118-SIS65812B603
580, Black, 4000K, 60°	118-SIS65812B604
General Specifications	
LED	12W
Lumens	1080 lm (3000K) 1080 lm (4000K)
Efficacy	83 lm/w (3000K) 84 lm/w (4000K)
Colour	3000K, Warm White 4000K, Cool White
Material	Powder Coated Aluminium
Finish	White Black
Beam	15° 24° 36° 45° 60°
CRI	92+
IP	20
Colour Deviation	SDCM ≤2
UGR	<15
Lifetime	>55,000hrs L80B10
Warranty	5 Years
Accessories	
15° Lens	118-SIL6015
24° Lens	118-SIL6024
36° Lens	118-SIL6036
45° Lens	118-SIL6045
Black Baffle	118-SIL60BB
Gold Baffle	118-SIL60BG
White Baffle	118-SIL60BW
Driver Specifications	
Power	300mA 240V Built-In Flicker Free Dimmable Driver
Dimming	Phase Cut Dimming
Power Factor	> 0.90
Remote DALI Dimming available upon request	

Compatible with remote Casambi CBU-TED Bluetooth Controllable Dimmer (71-CASCBU)

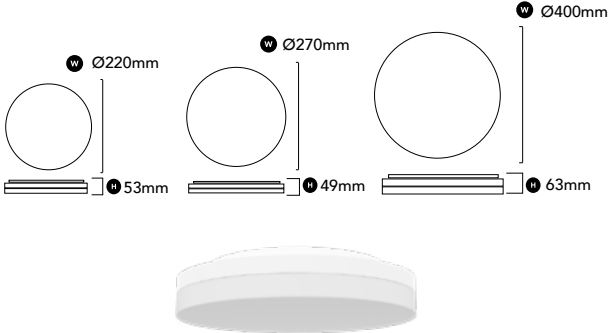


Luxe Circle	
Product Code	
15W/10W, White, 3000K, 110°	83-LXC2215W3
15W/10W, White, 4000K, 110°	83-LXC2215W4
24W/18W, White, 3000K, 110°	83-LXC2724W3
24W/18W, White, 4000K, 110°	83-LXC2724W4
38W/29W, White, 3000K, 110°	83-LXC4038W3
38W/29W, White, 4000K, 110°	83-LXC4038W4
General Specifications	
LED	15W/10W 24W/18W 38W/29W
Lumens	15W/10W 1570/1070 lm (3000K) 15W/10W 1620/1170 lm (4000K) 24W/18W 2455/1885 lm (3000K) 24W/18W 2640/2010 lm (4000K) 38W/29W 3860/3020 lm (3000K) 38W/29W 4090 /3215 lm (4000K)
Efficacy	15W/10W 111/113 lm/w (3000K) 15W/10W 120/121 lm/w (4000K) 24W/18W 107/109 lm/w (3000K) 24W/18W 113/114 lm/w (4000K) 38W/29W 105/105 lm/w (3000K) 38W/29W 109/109 lm/w (4000K)
Colour	3000K, Warm White 4000K, Cool White
Material	Polycarbonate
Finish	White
Beam	110°
CRI	90+
IP	54 (Ø 220 & Ø 270) 20 (Ø 400)
IK	10
Colour Deviation	SDCM ≤3
UGR	<26
Lifetime	>30,000hrs L70B10
Warranty	3 Years
Driver Specifications	
Power	240V Built-in Flicker Free Dimmable Driver
Dimming	Phase Cut Dimming
Power Factor	> 0.95
DALI Dimming available upon request	

Compatible with remote Casambi CBU-TED Bluetooth Controllable Dimmer (71-CASCBU)

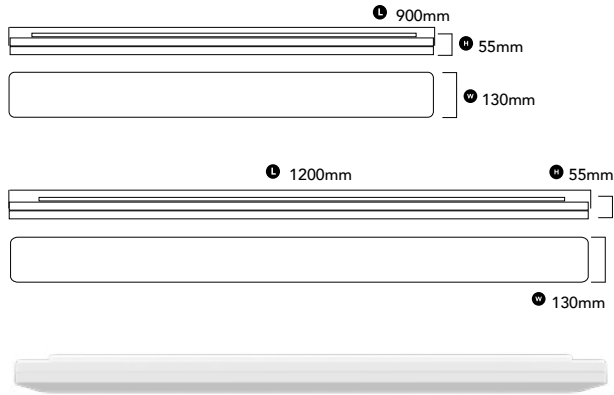

Luxe Long	
Product Code	
32W/24W, White, 3000K, 110°	83-LXL903224W3
32W/24W, White, 4000K, 110°	83-LXL903224W4
38W/29W, White, 3000K, 110°	83-LXL1203829W3
38W/29W, White, 4000K, 110°	83-LXL1203829W4
General Specifications	
LED	32W/24W (900mm) 38W/29W (1200mm)
Lumens	32W/24W 3200/2400 lm (3000K) 32W/24W 3360/2520 lm (4000K) 38W/29W 3800/2900 lm (3000K) 38W/29W 3990/3045 lm (4000K)
Efficacy	32W/24W 100 lm/w (3000K) 32W/24W 105 lm/w (4000K) 38W/29W 100 lm/w (3000K) 38W/29W 105 lm/w (4000K)
Colour	3000K, Warm White 4000K, Cool White
Material	Polycarbonate
Finish	White
Beam	110°
CRI	90+
IP	54
IK	10
Colour Deviation	SDCM ≤3
UGR	<30
Lifetime	>30,000hrs L70B10
Warranty	3 Years
Driver Specifications	
Power	240V Built-in Flicker Free Dimmable Driver
Dimming	Non-Dimming
Power Factor	> 0.95
DALI Dimming available upon request	


Compatible with remote Casambi CBU-TED Bluetooth Controllable Dimmer (71-CASCBU)

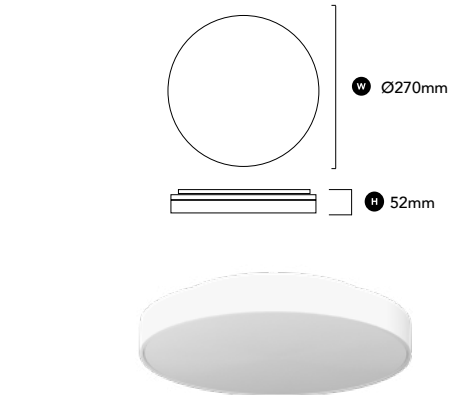

Lucid T 270	
Product Code	
18W 24W, 3000K, White, 110°	83-LCDT2724W3
18W 24W, 4000K, White, 110°	83-LCDT2724W4
18W 24W, 3000K, Black, 110°	83-LCDT2724B3
18W 24W, 4000K, Black, 110°	83-LCDT2724B4
General Specifications	
LED	18W 24W
Lumens	18W 2060 lm (3000K) 2060 lm (4000K) 24W 2625 lm (3000K) 2625 lm (4000K)
Efficacy	18W 112 lm /w (3000K) 109 lm/w (4000K) 24W 108 lm/w (3000K) 104 lm/w (4000K)
Colour	3000K, Warm White 4000K, Cool White
Material	PMMA Polycarbonate
Finish	White Black
Beam	110°
CRI	90+
IP	54
IK	10
Colour Deviation	SDCM ≤3
UGR	<26
Lifetime	>30,000hrs L70B10
Warranty	3 Years
Driver Specifications	
Power	240V Built-in Flicker Free Dimmable Driver
Dimming	Phase Cut Dimming
Power Factor	> 0.95
DALI Dimming available upon request	

Compatible with remote Casambi CBU-TED Bluetooth Controllable Dimmer (71-CASCBU)



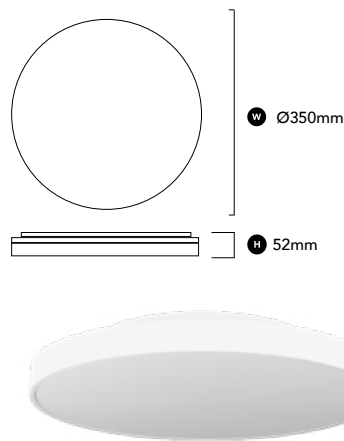

Lucid T 350	
Product Code	
29W, 3000K, White, 110°	83-LCDT3529W3
29W, 4000K, White, 110°	83-LCDT3529W4
29W, 3000K, Black, 110°	83-LCDT3529B3
29W, 4000K, Black, 110°	83-LCDT3529B4
General Specifications	
LED	29W
Lumens	3140 lm (3000K) 3140 lm (4000K)
Efficacy	111 lm/w (3000K) 106 lm/w (4000K)
Colour	3000K, Warm White 4000K, Cool White
Material	PMMA Polycarbonate
Finish	White Black
Beam	110°
CRI	90+
IP	54
IK	10
Colour Deviation	SDCM ≤3
UGR	<26
Lifetime	>30,000hrs L70B10
Warranty	3 Years
Driver Specifications	
Power	240V Built-in Flicker Free Dimmable Driver
Dimming	Phase Cut Dimming
Power Factor	> 0.95
DALI Dimming available upon request	

Compatible with remote Casambi CBU-TED Bluetooth Controllable Dimmer (71-CASCBU)



**2021/22
SURFACE MOUNTED
COLLECTION**

1300 438 609

Radiant Lighting
10 Gibberd Road
Balcatta W.A 6021

www.faze.com.au

Please note specifications are subject to change.

Please refer to our website for current specifications.

Edition 31.3.21

© Copyright 2021 Radiant Lighting Pty Ltd. All rights reserved.

