






Contents

- 4 Our Suspension Collection Key Features
- **13** Suspension Collection Specifications

Product Contents



Silo 40 Silo 60 6 Suspension Suspension Specifications 13 13 Specifications





Suspension Lights

Suspension lights are suitable for lighting large spaces, as well as directing light onto a particular area. Suspension lighting has become a decorative addition to interior design, perfect for both individual use or clustered in a group. Extremely versatile, these pendants can transform the look and feel of any room.

Suspension Light 1 2



Our Suspension Collection Key Features





Flicker Free Light



This collection features various finishes for both the fitting and its accessories, with black and white powder coated finishes for the bodies and black, white and gold available for the baffles.

Quick Connect Canopies

Our suspension collection features quick consuspension conjection reatures quick connect canopies that have been designed for ease and simplicity. These canopies allow for a simple installation process as well as a seamless final look, which compliments the aesthetic of the whole fitting.

Our unique built-in digital flicker free technology eliminates flicker throughout the entire dimming range and minimises low-frequency output ripple currents. This ensures greater efficiency as it also extends the lifetime of the fitting.

Various Product and Baffle Finishes

Suspension Light 1 4




Silo Suspension

The Silo Suspension has a simple yet sophisticated design, providing endless design opportunities. With various heights and diameters, the Silo Suspension allows you to create unique and dynamic lighting to your space.



Silo Suspension 40 LED 6W 520 lm (3000K) 520 lm (4000K) Lumens Cable Length 2m

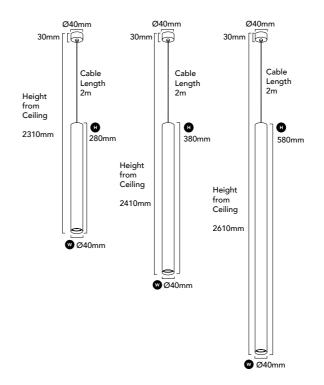





Silo Suspension 60

LED	12W
Lumens	1080 lm (3000K) 1080 lm (4000K)
~	

2m

Cable Length

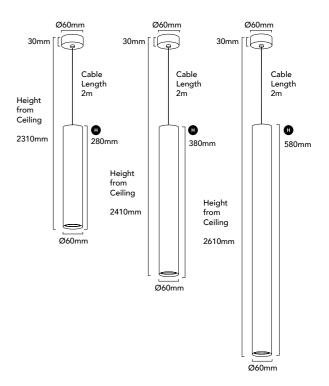

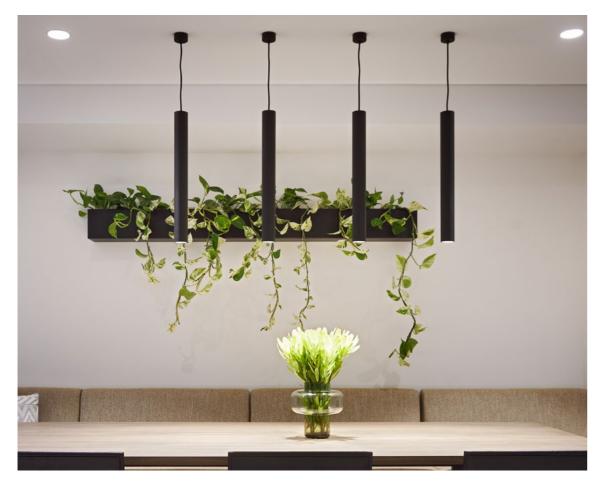



Quick Connection System

The quick connection system has been designed for ease and simplicity, allowing a fast and simple installation process. This allows for a seamless design that complements the aesthetic of the fitting.




Advanced Lens Technology

The Silo Suspension features the latest in lens technology, guiding virtually every ray of light emitted by the LED. The lens improves the efficiency of the fitting, enhances visual comfort and dramatically reduces glare.



Slim, Modern Design

The Silo Suspension is designed with a modern aesthetic in mind. Created as a slim and modern lighting alternative for over a kitchen bench, table or in a cluster.

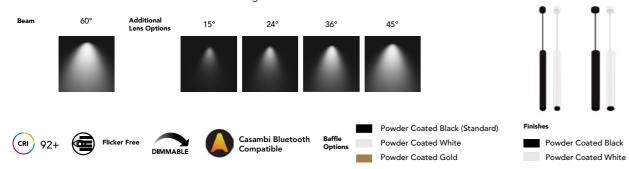





Make a Statement

The Silo Suspension creates the perfect lighting feature. Both functional and decorative, the Silo Suspension is extremely flexible in its design use.


Silo Suspension

0



Core Suspension

The Core Suspension provides yet another alternative to our suspension collection. The Core Suspension is a shorter, yet wider fitting compared to others in our range; providing an exceptionally high lumen output.







Built in Dimmable Flicker Free Driver

The Core Suspension features a built in phase cut dimmable driver, for ease of installation and a seamless design.



Quick Connection System

The Core Suspension features a quick connection system, which has been designed for durability and simplicity. This provides easy access to the internal wiring components.



Refined Black Baffle

A slim black baffle design, for visual comfort and reduced glare.

High Quality Reflector

For better light distribution and performance.







Powder Coated Black (Standard) Powder Coated White Powder Coated Gold

Available as a track mount.

Powder Coated Black Powder Coated White

Suspension Collection Specifications

Height (H)	280mm	380mm	580mm		
Height (H) Width (W)	280mm Ø40mm	380mm Ø40mm			
Canopy Dim			─── ♥↓		
Width Ø40m		-		•	
		s	ilo 40 Suspension		
		3	Product Code		
280, White	, 3000K, 6	0°	118-SIP42806W603		
280, White			118-SIP42806W604		
280, Black,			118-SIP42806B603		
280, Black,			118-SIP42806B604		
380, White			118-SIP43806W603		
380, White			118-SIP43806W604		
380, Black,	3000K, 60	0	118-SIP43806B603		
380, Black,			118-SIP43806B604		
580, White, 3000K, 60°			118-SIP45806W603		
580, White	, 4000K, 6	0°	118-SIP45806W604		
580, Black, 3000K, 60°)°	118-SIP45806B603		
580, Black, 4000K, 60°)°	118-SIP45806B604	118-SIP45806B604	
		Ge	neral Specifications		
LED			6W		
Lumens			520 lm (3000K) 520 lm (4000K)		
Efficacy			79 lm/w (3000K) 77 lm/w (4000K)	79 lm/w (3000K) 77 lm/w (4000K)	
Colour			3000K, Warm White 4000K, Cool White		
Material			Powder Coated Aluminium		
Finish			White Black		
Beam			15° 24° 36° 45° 60°		
CRI			92+		
IP			20		
Colour Deviation			SDCM ≤2		
UGR			<15	<15	
Lifetime			>55,000hrs L80B10	>55,000hrs L80B10	
Warranty			5 Years		
Cable Leng	gth		2m		
			Accessories		
15° Lens			118-SIL4015		
24° Lens			118-SIL4024		
36° Lens			118-SIL4036		
45° Lens			118-SIL4045		
Black Baffle			118-SIL40BB	118-SIL40BB	
Gold Baffle			118-SIL40GB		
White Baffl	e		118-SIL40WB		
		Di	iver Specifications		
-			150mA 240V Built-In Flicker Free D Driver	immal	
Power			Billio		

Compatible with remote Casambi CBU-TED Bluetooth Controllable Dimmer (71-CASCBU)



Height (H)	280mm	380mm	580mm	
Width (W)	Ø60mm	Ø60mm	Ø60mm 🖉	
Canopy Dime	ensions (App	licable to	ll heights)	
Width Ø60m	m x Height 3	30mm		•
		s	lo 60 Suspension	
			Product Code	
280, White,	3000K, 60)°	118-SIP62812W603	
280, White,	4000K, 60)°	118-SIP62812W604	
280, Black,	3000K, 60	0	118-SIP62812B603	
280, Black,	4000K, 60	0	118-SIP62806B604	
380, White,	3000K, 60	0	118-SIP63806W603	
380, White,	4000K, 60	D	118-SIP63806W604	
380, Black,	3000K, 60°		118-SIP63806B603	
380, Black,	4000K, 60°		118-SIP63806B604	
580, White,	3000K, 60	0	118-SIP65806W603	
580, White,			118-SIP65806W604	
580, Black,			118-SIP65806B603	
580, Black,	4000K, 60		118-SIP65806B604	
		Ge	neral Specifications	
LED			12W	2014)
Lumens			1080 lm (3000K) 1080 lm (400	
Efficacy			83 lm/w (3000K) 84 lm/w (400	JUK)
Colour			3000K, Warm White 4000K, Cool White	
Material			Powder Coated Aluminium	
Finish			White Black	
Beam			15° 24° 36° 45° 60°	
CRI			92+	
IP			20	
Colour Dev	viation		SDCM ≤2	
UGR			<15	
Lifetime			>55,000hrs L80B10	
Warranty			5 Years	
Cable Leng	jth		2m	
4507			Accessories	
15° Lens			118-SIL6015	
24° Lens			118-SIL6024	
36° Lens			118-SIL6036	
45° Lens			118-SIL6045	
Black Baffle			118-SIL60BB	
Gold Baffle			118-SIL60GB	
White Baffle	9	-	118-SIL60WB	
		D	200mA 240V Built In Elicker E	roo Dim I
Power			300mA 240V Built-In Flicker F Driver	ree Dimmat
Dimmina			Phase Cut Dimming	
Dimming				

Compatible with remote Casambi CBU-TED Bluetooth Controllable Dimmer (71-CASCBU)



	60mm	
 Height from ceiling 	Cable Length 2m	
2180mm	Fitting Body Height 150mm	
Canopy Di	© Ø95mm imensions	0

Width Ø60mm x Height 30mm

C	Core Suspension	
	Product Code	
White, 3000K, 60°	118-COS12W603	
White, 4000K, 60°	118-COS12W604	
Black, 3000K, 60°	118-COS12B603	
Black, 4000K, 60°	118-COS12B604	
Ger	neral Specifications	
LED	12W	
Lumens	1015 lm (3000K) 1090 lm (4000K)	
Efficacy	75 lm/w (3000K) 81 lm/w (4000K)	
Colour	3000K, Warm White 4000K, Cool White	
Material	Powder Coated Aluminium	
Finish	White Black	
Beam	36° 60°	
CRI	92+	
IP	20	
Colour Deviation	SDCM ≤2	
UGR	<17	
.ifetime >55,000hrs L80B10		
Warranty	5 Years	
Cable Length	2m	
	Accessories	
36° Reflector	118-RFLCOR36	
Black Baffle	118-CORBB	
White Baffle	118-CORBW	
Gold Baffle	118-CORBG	
Dr	iver Specifications	
Power	300mA 240V Built-in Dimmable Driver	
Dimming	Phase Cut Dimming	
Power Factor	> 0.95	

Compatible with remote Casambi CBU-TED Bluetooth Controllable Dimmer (71-CASCBU)





2021/22 SUSPENSION COLLECTION

1300 438 609

Radiant Lighting 10 Gibberd Road Balcatta W.A 6021

www.faze.com.au

Please note specifications are subject to change.

Please refer to our website for current specifications.

Edition 31.3.21

© Copyright 2021 Radiant Lighting Pty Ltd. All rights reserved.

Suspension Light 14

www.faze.com.au