



-_Z =

2021/22 WALL LIGHTS COLLECTION



Contents

- 4 Our Wall Light Collection Key Features
- **19** Wall Lights Specifications

Product Contents









Cubix

Cubix Square











Our Wall Light Collection Key Features



Durability

Our wall light collection features fittings that are IP65 rated, designed to be used outdoors and widthstand any weather conditions.



Minimal and Modern

This collection is minimalistic in design, ideal to suit any modern space. Our wall lights feature clean lines, smooth powder coated finishes and silhouettes that will fit seamlessly into your




Various Beams Available

With access to a variety of advanced LEDs, we have utilised this technology to develop a range of wall lights that include various beam angles. This provides you with a variety of options to highlight architectural features or create ambience.



Kubo

The Kubo is subtle yet stylish in design. With its high IP rating and two-directional light output, it is equally suited for indoor and outdoor applications.

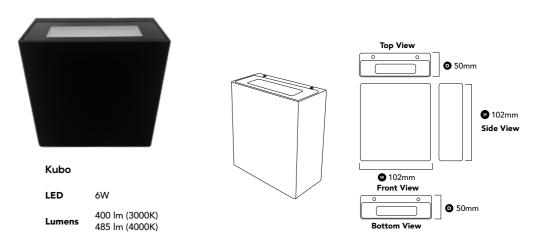







Diffuse Lens


The Kubo features a diffuse lens, providing soft ambient light.

Subtractive Design

When developing the Kubo, a subtractive design philosophy was used, removing any imperfections and extraneous parts to create a strong, minimalistic design.

Built in Flicker Free Driver

Featuring a built in flicker free driver, the Kubo has an increased power factor ensuring greater efficiency.

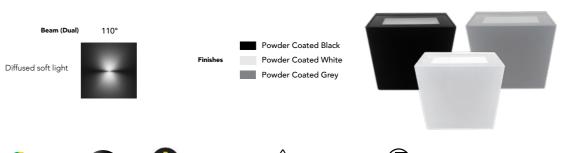














Kobi

Kobi is an IP20 rated internal wall light. It features a seamless external design for visual comfort, achieved by concealing the mounting screws inside the fitting. Kobi also features 2x3W LED chips with 92+ CRI achieving a crisp light output.



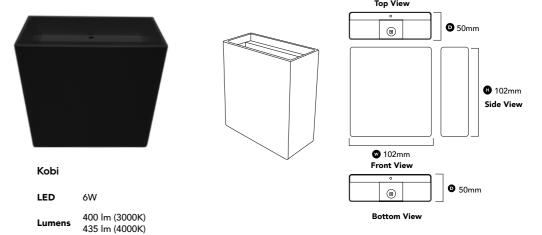





Creating the perfect soft, ambient light emission.



Minimalistic Square Design

A simplistic design, ideal for modern



Built in Flicker Free Driver


The Kobi has an increased power factor, ensuring greater efficiency.






Dice

The sleek, rectangular design of the Dice, as well as its high IP rating and two-directional light output, ensures that it is equally suited for indoor and outdoor applications.

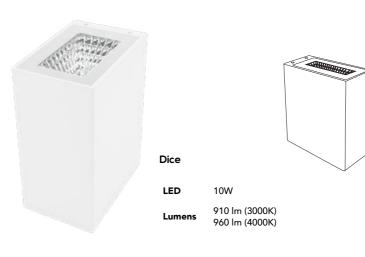








The Dice features a removable driver, providing an easier and faster installation process. As well as allowing for a remote driver, if required.



Deep Set Reflector

The deep set faceted reflector results in maximum light emission.



High Quality Aluminium Housing

Ideal for exterior lighting applications.



















Cubix

The sleek, minimal geometric design of the Cubix series is equally suited for both indoor and outdoor spaces.

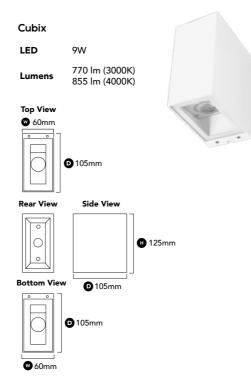

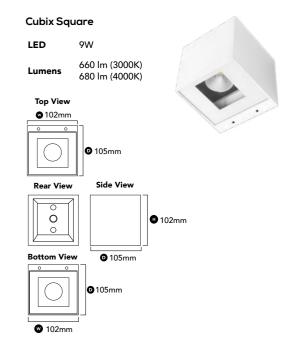





The Cubix lenses are angled onto the surface to accentuate the light emission.



Two-Directional Light Output

Incorporating both an upward and downward light direction, the Cubix series creates a structured lighting effect on both pillars and walls.



Cubix Square High Quality Reflector

The Cubix Square has a high quality reflector that contributes greatly to the high lumen output of the fitting.






CRI 90+ DIMMABLE

Pilot

The Faze Pilot is a modernised wall light that produces subtle illumination; perfect for stairs and hallways.

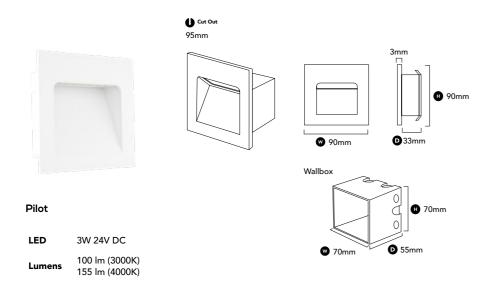





The Pilot has been designed to suit a modern home interior.




Curved, Slim Design


With a curved edge and slim profile, the Pilot is a stylish addition to our wall light collection.



Ambient or Guiding Light


Utilise this fitting as a guiding light along staircases and walkways, or as a source of ambient light throughout your home.

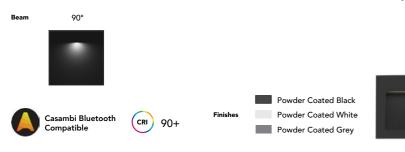

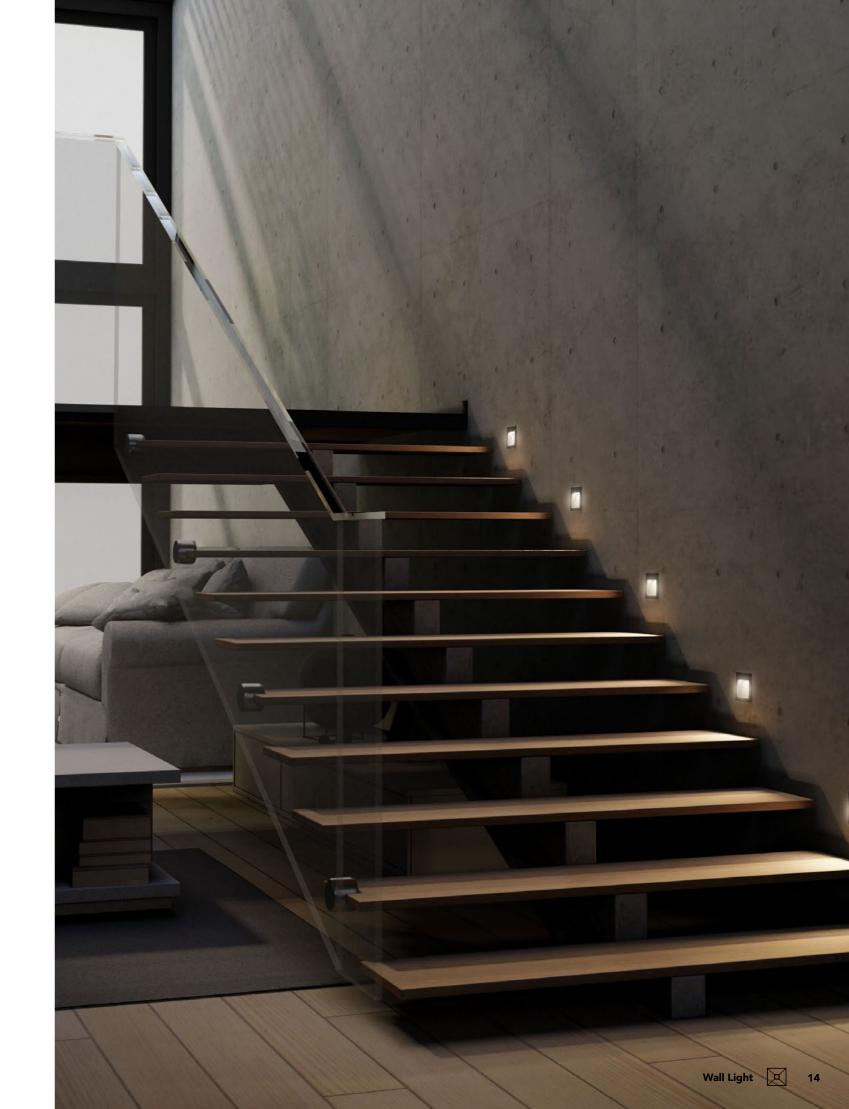

Step

The Faze Step fittings are modern luminaires that provide subtle light; perfect for stairs and hallways. With an IP rating of 54, they are suitable for both external and internal applications.

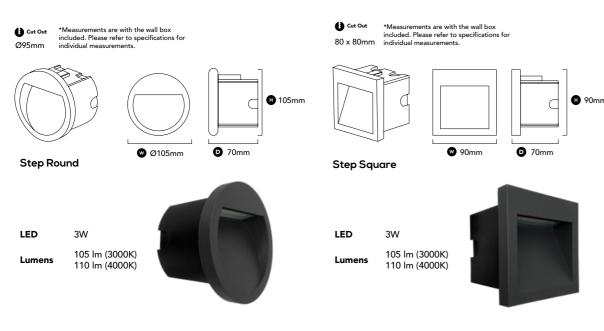



Built In 240V Driver

The Step fittings feature built in 240V drivers, resulting in a simple installation process.




PVC Wall Box

All the Step fittings include a PVC wall box, for safe storage of the fitting's With an IP rating of 54, the Step fittings can be used both indoors electrical connections.



IP 54

fittings can be used both indoors and outdoors, including wet areas.














Product Specifications page 22



Slide

Minimal, functional and versatile, the Slide is dual purpose, designed for both decorative and functional lighting applications.

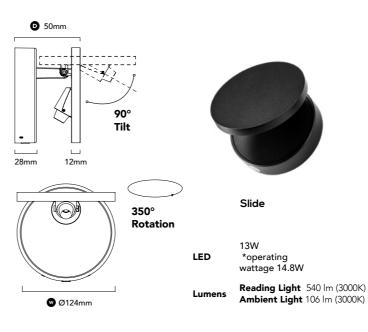




The Most Flexible Wall Light Available

With the ability to tilt, rotate and have two different light modes, the Slide is the most flexible wall light we have available. An all-in-one light, the Slide can be used in any project, for any application.







Advanced Illumination Technology

The Slide offers optimum light versatility, with the ability to change between decorative and accent lighting modes. With the simple press of a button, this fitting can go from a 360° illuminous glow, to a 60° beam angle; ideal for accent or task lighting.

Product Specifications page 22

90° Adjustable 350° Rotation

Using a circular hinge design, the Slide has the ability to be adjusted up to 90° and rotated up to 350°; for a variety of lighting opportunities.

Touch Sensitive Dimming

The Slide uses touch sensitivity to control its dimming settings. With a small button illuminated with a soft amber light, it is easily accessible if needed throughout the night.

Powder Coated Black Powder Coated White Powder Coated Silver








Wall Light 18

Wall Lights Specifications




	Kubo	
Product Code		
White, 3000K, 110°	7-KU6W1103	
White, 4000K, 110°	7-KU6W1104	
Black, 3000K, 110°	7-KU6B1103	
Black, 4000K, 110°	7-KU6B1104	
Grey, 3000K, 110°	7-KU6G1103	
Grey, 4000K, 110°	7-KU6G1104	
General Specifications		
LED	6W	
Lumens	400 lm (3000K) 486 lm (4000K)	
Efficacy	66 lm/w (3000K) 69 lm/w	
Colour	3000K, Warm White 4000K, Cool White	
Material	Powder Coated Aluminium	
Finish	White Black Grey	
Beam	110°	
CRI	84+	
IP	65	
Colour Deviation	SDCM ≤3	
Lifetime	>55,000hrs L80B10	
Warranty	3 Years	
Driv	ver Specifications	
Power	300mA 240V Built-in Flicker Free Dimmable Driver	
Dimming	Phase Cut Dimming	

Compatible with remote Casambi CBU-TED Bluetooth Controllable Dimmer (71-CASCBU)

> 0.90

Power Factor






	Kobi
Product Code	
White, 3000K, 90°	7-KO6W903
White, 4000K, 90°	7-KO6W904
Black, 3000K, 90°	7-KO6B903
Black, 4000K, 90°	7-KO6B904
Grey, 3000K, 90°	7-KO6G903
Grey, 4000K, 90°	7-KO6G904
Ger	neral Specifications
LED	6W
Lumens	400 lm (3000K) 435 lm (4000K)
Efficacy	52 lm/w (3000K) 58 lm/w (4000K)
Colour	3000K, Warm White 4000K, Cool White
Material	Powder Coated Aluminium
Finish	White Black Grey
Beam	90°
CRI	92+
IP	20
Colour Deviation	SDCM ≤3
UGR	<10
Lifetime	>55,000hrs L80B10
Warranty	3 Years
Dr	iver Specifications
Power	250mA 240V Built-in Flicker Free Dimmable Driver
Dimming	Phase Cut Dimming
Power Factor	> 0.90

Compatible with remote Casambi CBU-TED Bluetooth Controllable Dimmer (71-CASCBU)






	Dice	
Product Code		
White, 3000K, 90°	7-DI10W903	
White, 4000K, 90°	7-DI10W904	
Black, 3000K, 90°	7-DI10B903	
Black, 4000K, 90°	7-DI10B904	
Grey, 3000K, 90°	7-DI10G903	
Grey, 4000K, 90°	7-DI10G904	
Gen	eral Specifications	
LED	10W	
Lumens	910 lm (3000K) 960 lm (4000K)	
Efficacy	66 lm/w (3000K) 72 lm (4000K	
Colour	3000K, Warm White 4000K, Cool White	
Material	Powder Coated Aluminium	
Finish	White Black Grey	
Beam	90°	
CRI	92+	
IP	65	
Colour Deviation	SDCM ≤3	
Lifetime	>50,000hrs L80B10	
Warranty	3 Years	
Driv	ver Specifications	
Power	500mA 240V Built-in Flicker Free Dimmable Driver	
Dimming	Phase Cut Dimming	
Power Factor	> 0.90	

Compatible with remote Casambi CBU-TED Bluetooth Controllable Dimmer (71-CASCBU)






Cubix			
Product Code			
White, 3000K, 30°	83-CU9W303		
White, 4000K, 30°	83-CU9W304		
Black, 3000K, 30°	83-CU9B303		
Black, 4000K, 30°	83-CU9B304		
Grey, 3000K, 30°	83-CU9G303		
Grey, 4000K, 30°	83-CU9G304		
General Specifications			
LED	9W		
Lumens	770 lm (3000K) 855 (4000K)		
Efficacy	69 lm/w (3000K) 78 lm/w (4000K)		
Colour	3000K, Warm White 4000K, Cool White		
Material	Powder Coated Aluminium		
Finish	White Black Grey		
Beam	30°		
CRI	90+		
IP	65		
Colour Deviation	SDCM ≤3		
Lifetime	>55,000hrs L80B10		
Warranty	3 Years		
Driver Specifications			
Power	500mA 240V Buillt-In Dimmable Driver		
Dimming	Phase Cut Dimming		
Power Factor	> 0.90		



Wall Light 20 19






	Cubix Square
Product Code	
White, 3000K, 30°	83-CUS9W303
White, 4000K, 30°	83-CUS9W304
Black, 3000K, 30°	83-CUS9B303
Black, 4000K, 30°	83-CUS9B304
Grey, 3000K, 30°	83-CUS9G303
Grey, 4000K, 30°	83-CUS9G304
Ge	eneral Specifications
LED	9W
Lumens	660 lm (3000K) 680 lm (4000K)
Efficacy	58 lm/w (3000K) 62 lm/w (4000K)
Colour	3000K, Warm White 4000K, Cool White
Material	Powder Coated Aluminium
Finish	White Black Grey
Beam	30°
CRI	90+
IP	65
Colour Deviation	SDCM ≤3
Lifetime	>55,000hrs L80B10
Warranty	3 Years
Di	river Specifications
Power	500mA 240V Buillt-In Dimmable Driver
Dimming	Phase Cut Dimming



> 0.90

Power Factor




Pilot		
Product Code		
White, 3000K, 90°	118-PI3W903	
White, 3000K, 90°	118-PI3W904	
Black, 3000K, 90°	118-PI3B903	
Black, 4000K, 90°	118-PI3B904	
Grey, 3000K, 90°	118-PI3G903	
Grey, 4000K, 90°	118-PI3G904	
General Specifications		
LED	3W 24V DC	
Lumens	100lm (3000K) 155 lm (4000K)	
Efficacy	35lm/w (3000K) 37lm/w (4000K)	
Colour	3000K, Warm White 4000K, Cool White	
Material	Powder Coated Aluminium	
Finish	White Black Grey	
Beam	90°	
CRI	90+	
IP	20	
Colour Deviation	SDCM ≤3	
Lifetime	>55,000hrs L80B10	
Warranty	3 Years	
Driver Specifications		
Power	240V DC	
Dimming	Non Dimming	
Power Factor	> 0.90	

Compatible with remote Casambi CBU-TED Bluetooth Controllable Dimmer (71-CASCBU)






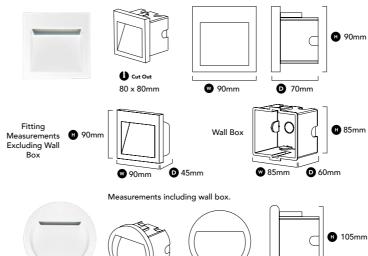

™ Ø105mm

0 70mm




:	Step
Prod	uct Code
Round, White, 3000K, 90°	11-STR3W3
Round, White, 4000K, 90°	11-STR3W4
Round, Anthracite, 3000K, 90°	11-STR3A3
Round, Anthracite, 4000K, 90°	11-STR3A4
Square, White, 3000K, 90°	11-STS3W3
Square, White, 4000K, 90°	11-STS3W4
Square, Anthracite, 3000K, 90°	11-STS3A3
Square, Anthracite, 4000K, 90°	11-STS3A4
General S	Specifications
LED	3W
Lumens	105 lm (3000K) 110 lm (4000K)
Efficacy	35 lm/w (3000K) 36 lm/w (4000K)
Colour	3000K, Warm White 4000K, Cool White
Material	Aluminium Glass PVC Wall Box
Finish	White Anthracite
Beam	90°
CRI	80+
IP	54
Colour Deviation	SDCM ≤3
Lifetime	>55,000hrs L80B10
Warranty	3 Years (This fitting is not recommended for coastal areas)
Driver Specifications	
Power	350mA 240V Buillt-In Driver

Compatible with remote Casambi CBU-TED Bluetooth Controllable Dimmer (71-CASCBU)


Non Dimming

> 0.90









White, 3000K 83-SL8W3603 Silver, 3000K 83-SL8S3603 General Specifications LED 6W Ambient Light 2.6W Reading Light Lumens Ambient Light 540 Im Reading Light 106 Im Efficacy 104 Im/w Colour 3000K, Warm White Material Aluminium & PMMA Finish Black White Silver Beam Ambient and Reading CRI 90+ IP 40 Lifetime >50,000hrs L80B10 Warranty 3 Years Driver Specifications Power 240V Buillt-In Dimmable Driver Dimming Phase Cut Dimming			
Black, 3000K 83-SL8B3603		Slide	
White, 3000K 83-SL8W3603 Silver, 3000K 83-SL8S3603 General Specifications LED 6W Ambient Light 2.6W Reading Light Lumens Ambient Light 540 Im Reading Light 106 Im Efficacy 104 Im/w Colour 3000K, Warm White Material Aluminium & PMMA Finish Black White Silver Beam Ambient and Reading CRI 90+ IP 40 Lifetime >50,000hrs L80B10 Warranty 3 Years Driver Specifications Power 240V Buillt-In Dimmable Driver Dimming Phase Cut Dimming	Product Code		
Silver, 3000K 83-SL8S3603	Black, 3000K	83-SL8B3603	
General Specifications	White, 3000K	83-SL8W3603	
CR Phase Cut Dimming Phase Cut Dimming	Silver, 3000K	83-SL8S3603	
2.6W Reading Light Lumens	General Specifications		
Reading Light 106 lm	LED		
Colour 3000K, Warm White Material Aluminium & PMMA Finish Black White Silver Beam Ambient and Reading CRI 90+ IP 40 Lifetime >50,000hrs L80B10 Warranty 3 Years Driver Specifications Power 240V Buillt-In Dimmable Driver Dimming Phase Cut Dimming	Lumens	_	
Material Aluminium & PMMA Finish Black White Silver Beam Ambient and Reading CRI 90+ IP 40 Lifetime >50,000hrs L80B10 Warranty 3 Years Driver Specifications Power 240V Buillt-In Dimmable Driver Dimming Phase Cut Dimming	Efficacy	104 lm/w	
Finish Black White Silver Beam Ambient and Reading CRI 90+ IP 40 Lifetime >50,000hrs L80B10 Warranty 3 Years Driver Specifications Power 240V Buillt-In Dimmable Driver Dimming Phase Cut Dimming	Colour	3000K, Warm White	
Ambient and Reading	Material	Aluminium & PMMA	
P	Finish	Black White Silver	
P	Beam	Ambient and Reading	
Lifetime	CRI	90+	
Warranty 3 Years Driver Specifications Power 240V Buillt-In Dimmable Driver Dimming Phase Cut Dimming	IP	40	
Driver Specifications Power 240V Buillt-In Dimmable Driver Dimming Phase Cut Dimming	Lifetime	>50,000hrs L80B10	
Power 240V Buillt-In Dimmable Driver Dimming Phase Cut Dimming	Warranty	3 Years	
Dimming Phase Cut Dimming	Driver Specifications		
	Power	240V Buillt-In Dimmable Driver	
Power Factor > 0.90	Dimming	Phase Cut Dimming	
	Power Factor	> 0.90	







$\neg \land \exists \sqsubseteq$

2021/22 WALL LIGHT COLLECTION

1300 438 609

Radiant Lighting 10 Gibberd Road Balcatta W.A 6021

www.faze.com.au

Please note specifications are subject to change.

Please refer to our website for current specifications.

Edition 31.3.21

© Copyright 2021 Radiant Lighting Pty Ltd. All rights reserved.

