


PROJECT:

TYPE:

NOTES:

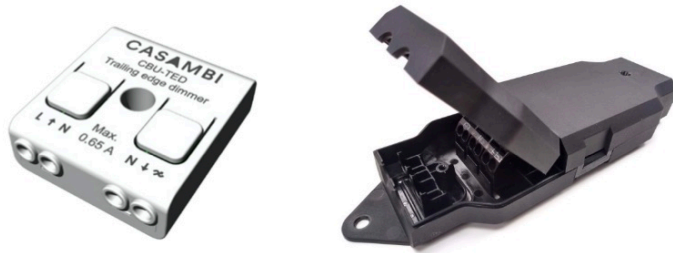

CBU-TED is a Bluetooth controllable, Casambi enabled trailing-edge dimmer for operation of incandescent lamps, dimmable LED lamps and dimmable LED control gear.




FEATURES

- + Available with or without CBU box
- + Trailing Edge Dimming
- + Can be controlled with Casambi app, available for iOS and Android devices
- + Can be installed behind a traditional wall switch, inside a luminaire or into a ceiling outlet box.
- + Able to control up to 150 VA at 230 VAC.
- + Features an overcurrent and over temperature protection
- + Dimmer module box comes with easy access lid for connecting supply on site
- + Loop in - loop out push fit connectors 20 to 12 AWG


GENERAL SPECIFICATIONS

Product Codes	71-CASCBU	(without CBU box)
	71-CASCBUBOX	(with CBU box)
Voltage Range	85-240 VAC	
Max. Output Current	0.65 A	
Dimming Method	Trailing-edge phase control	
Max. output power	150 VA @ 230 VAC 75 VA @ 120 VAC	
Min. Load Requirement	1W	
Max. Inrush Current	10 A, 100 ms	
IP	20	
Dimensions	40.4 x 36.3 x 14.0 mm	
Lifetime	Up to 100,000hrs	
Warranty	5 Years	


DIMENSIONS (mm)





Without box



Antenna location



With box

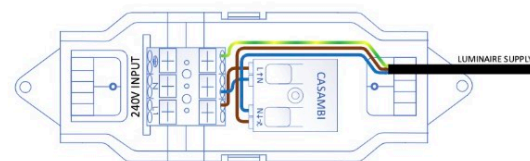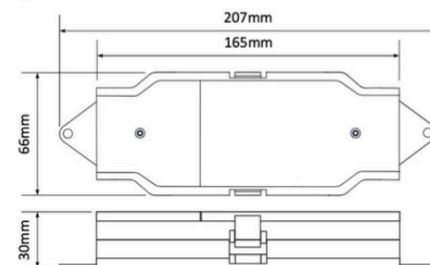

COMPATIBLE FITTINGS

FAZE

Air Surface	Lite Series	Luxe Square
Air Track	Line Opal	Pro Series
Core	Line Opal R	Pro Mini Series
Dash Series	Lucid A	Silo 40 Series
Dice	Lucid S	Silo 60 Series
Disc	Lucid T Series	Split
Ecco	Luna Starlight	Starlight LED
Edge Series	Luxe Circle	Step Series
Kobi	Luxe Long	Vita Series
Kubo		

