




The DASH linear downlight series delivers both flexibility and performance in any space. This recessed design is available in three sizes & two finishes

FEATURES

- + Available in 3 sizes
- + Tiltable up to 30°
- + IC-4 rated
- + High CRI
- + Compatible with remote Casambi CBU-TED Bluetooth Controllable Dimmer (71-CASCBU)

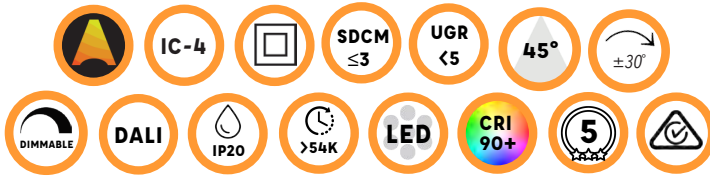

GENERAL SPECIFICATIONS

LED	20W
Lumens	1320 lm (3000K) 1400 lm (4000K)
Efficacy	62 lm/w (3000K) 64 lm/w (4000K)
Colour Temperature	<div style="display: flex; align-items: center;"> <div style="width: 15px; height: 15px; background-color: #f5deb3; border: 1px solid black; margin-right: 5px;"></div> 3000K, Warm White </div> <div style="display: flex; align-items: center; margin-top: 5px;"> <div style="width: 15px; height: 15px; background-color: #d9ead3; border: 1px solid black; margin-right: 5px;"></div> 4000K, Cool White </div>
Material	Powder Coated Aluminium
Finish	White Black
Beam	45°
CRI	90+
IP	20
Colour Deviation	SDCM ≤3
UGR	<5
Lifetime	>54,000hrs L80 B10
Warranty	5 Years


PROJECT DETAILS

PROJECT: _____

TYPE: _____

NOTES: _____

DIMENSIONS (mm)

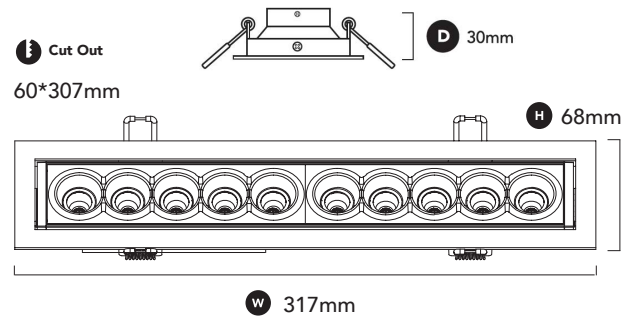

DRIVER SPECIFICATIONS

L 104 x W 43 x H 24 mm

Power	600mA 240V Remote Dimmable Driver
Dimming	Phase Cut Dimming
Power Factor	> 0.90

DALI dimming available upon request

PRODUCT CODE

20W, White, 3000K	7-DA2L20W453
20W, White 4000K	7-DA2L20W454
20W, Black, 3000K	7-DA2L20B453
20W, Black, 4000K	7-DA2L20B454