FLOW PLUS SIDE REAR ENTRY

Our brand new FAZE FLOW PLUS SIDE is a high quality, flexible polyurethane strip. It is ideal for use along ceilings, walls, cabinetry and stairways; both indoors and outdoors. This strip will ensure a seamless combination of style and functionality to any project!

PROJECT DETAILS

PROJECT:

TYPE:

NOTES:

FEATURES

+ Side emitting, for curving around surfaces where you require indirect light
+ UV & chemical resistant
+ 5W or 10W options
+ Compatible with Casambi devices
+ IP68 - Waterproof
+ Rear cable entry connection

DIMENSIONS (mm)

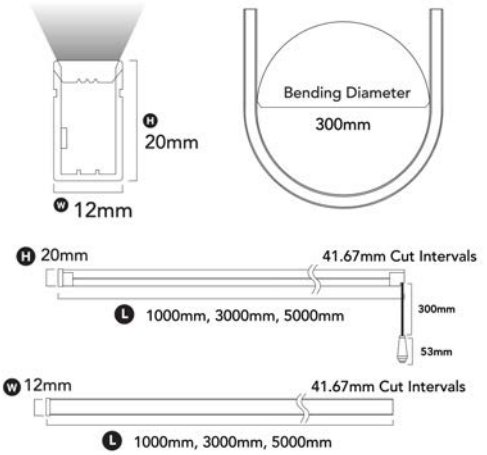

GENERAL SPECIFICATIONS

LED	5W p/m I 10W p/m
Lumens	280 lm/m (5W) I 630 lm/m (10W)
Colour	3000K, Warm White 4000K, Cool White
Efficacy	56 lm/w (5W) I 63 lm/w (10W)
Beam	120°
Lengths	1m I 3m I 5m rolls
Material	Polyurethane
CRI	92+
Finish	White
IP	68
Colour Deviation	SDCM ≤2
Warranty	5 Years
Voltage	DC 24V

PRODUCT CODES

5W, 3000K, 1m	**10-FPSR0531**
5W, 3000K, 3m	**10-FPSR0533**
5W, 3000K, 5m	**10-FPSR0535**
5W, 4000K, 1m	**10-FPSR0541**
5W, 4000K, 3m	**10-FPSR0543**
5W, 4000K, 5m	**10-FPSR0545**
10W, 3000K, 1m	**10-FPSR1031**
10W, 3000K, 3m	**10-FPSR1033**
10W, 3000K, 5m	**10-FPSR1035**
10W, 4000K, 1m	**10-FPSR1041**
10W, 4000K, 3m	**10-FPSR1043**
10W, 3000K, 5m	**10-FPSR1045**

COMPATIBLE CASAMBI DEVICES

BasicDIM 24V Wireless 4ch	**71-CAS24V**
BasicDIM Driver 24V 150W	**71-CAS24V150**
BasicDIM Driver 24V 100W	**71-CAS24V100**
BasicDIM Driver 24V 60W	**71-CAS24V60**
BasicDIM Driver 24V 35W	**71-CAS24V35**

ACCESSORIES



ALUMINIUM PROFILE

Dimensions:1000 (L) x 14.4 (W) x 21.4 (H) mm

Material: Aluminium

Product Code: 10-FP1220P1



FRONT VIEW