



Our brand new FAZE FLOW PLUS SIDE is a high quality, flexible polyurethane strip. It is ideal for use along ceilings, walls, cabinetry and stairways; both indoors and outdoors. This strip will ensure a seamless combination of style and functionality to any project!

FEATURES

- + Side emitting, for curving around surfaces where you require indirect light
- + UV & chemical resistant
- + 5W or 10W options available in either 1m, 3m or 5m rolls
- + Custom lengths available upon request (*minimum order quantity applies*)
- + Compatible with Casambi devices
- + IP68 - Waterproof
- + Dimmable (determined by driver)



GENERAL SPECIFICATIONS

LED	5W p/m 10W p/m (24V DC)
Lumens	5W p/m - 264 lm p/m (3000K & 4000K) 10W p/m - 528 lm p/m (3000K & 4000K)
Efficacy	5W p/m - 52 lm/w (3000K & 4000K) 10W p/m - 52 lm/w (3000K & 4000K)
Colour Temperature	 3000K, Warm White  4000K, Cool White
Material	Polyurethane
Finish	White
Beam	120°
CRI	92+
IP	68
Colour Deviation	SDCM ≤2
Lifetime	>54,000hrs L70 B10
Warranty	5 Years

COMPATIBLE CASAMBI DEVICES

BasicDIM 24V Wireless 4ch	71-CAS24V
BasicDIM Driver 24V 150W	71-CAS24V150
BasicDIM Driver 24V 100W	71-CAS24V100
BasicDIM Driver 24V 60W	71-CAS24V60
BasicDIM Driver 24V 35W	71-CAS24V35


PROJECT DETAILS

PROJECT:

TYPE:

NOTES:

DIMENSIONS (mm)

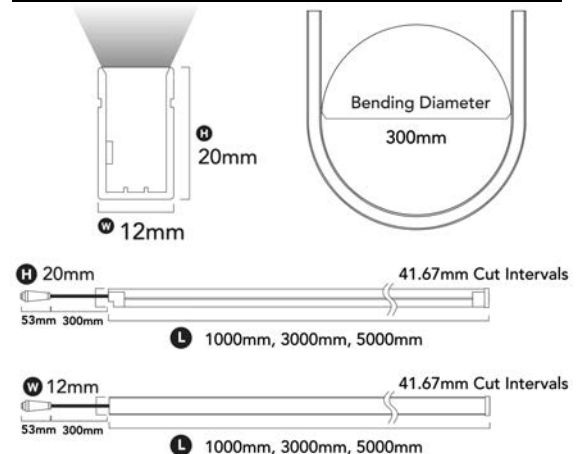

PRODUCT CODES

5W, 3000K, 1m	10-FPSF0531
5W, 3000K, 3m	10-FPSF0533
5W, 3000K, 5m	10-FPSF0535
5W, 4000K, 1m	10-FPSF0541
5W, 4000K, 3m	10-FPSF0543
5W, 4000K, 5m	10-FPSF0545
10W, 3000K, 1m	10-FPSF1031
10W, 3000K, 3m	10-FPSF1033
10W, 3000K, 5m	10-FPSF1035
10W, 4000K, 1m	10-FPSF1041
10W, 4000K, 3m	10-FPSF1043
10W, 3000K, 5m	10-FPSF1045

ACCESSORIES

Aluminium Profile 1000 (L) x 14.4 (W) x 21.4 (H) mm	10-FP1220P1
Aluminium Mounting Clips (set of 2)	10-FP1220MC