

Our brand new FAZE FLOW PLUS TOP is a high quality, flexible polyurethane strip. It is ideal for use along ceilings, walls, cabinetry and stairways; both indoors and outdoors. This strip will ensure a seamless combination of style and functionality to any project!

FEATURES

- + Top emitting light direction, for applications requiring direct light
- + UV & chemical resistant
- + 5W or 10W options available in either 1m, 3m or 5m rolls
- + Custom lengths available upon request (minimum order quantity applies)
- + Compatible with Casambi devices
- + IP68 - Waterproof
- + Dimmable (determined by driver)



GENERAL SPECIFICATIONS

LED	5W p/m 10W p/m (24V DC)
Lumens	5W p/m - 330 lm p/m (3000K & 4000K) 10W p/m - 636 lm p/m (3000K & 4000K)
Efficacy	5W p/m - 66 lm/w (3000K & 4000K) 10W p/m - 75 lm/w (3000K & 4000K)
Colour Temperature	3000K, Warm White 4000K, Cool White
Material	Polyurethane
Finish	White
Beam	120°
CRI	92+
IP	68
Colour Deviation	SDCM ≤2
Lifetime	>54,000hrs L70 B10
Warranty	5 Years

COMPATIBLE CASAMBI DEVICES

BasicDIM 24V Wireless 4ch	71-CAS24V
BasicDIM Driver 24V 150W	71-CAS24V150
BasicDIM Driver 24V 100W	71-CAS24V100
BasicDIM Driver 24V 60W	71-CAS24V60
BasicDIM Driver 24V 35W	71-CAS24V35


PROJECT DETAILS

PROJECT:

TYPE:

NOTES:

DIMENSIONS (mm)

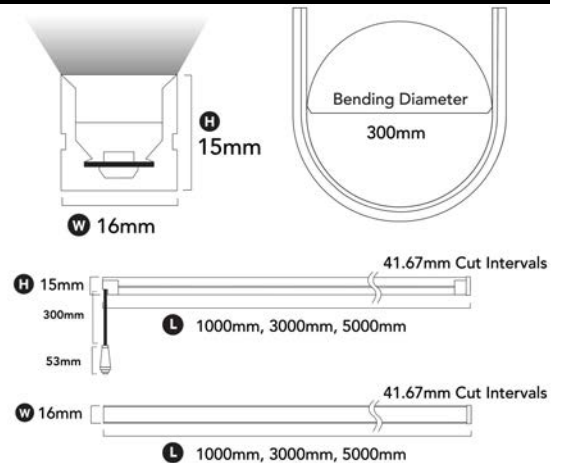

PRODUCT CODES

5W, 3000K, 1m	10-FPTR0531
5W, 3000K, 3m	10-FPTR0533
5W, 3000K, 5m	10-FPTR0535
5W, 4000K, 1m	10-FPTR0541
5W, 4000K, 3m	10-FPTR0543
5W, 4000K, 5m	10-FPTR0545
10W, 3000K, 1m	10-FPTR1031
10W, 3000K, 3m	10-FPTR1033
10W, 3000K, 5m	10-FPTR1035
10W, 4000K, 1m	10-FPTR1041
10W, 4000K, 3m	10-FPTR1043
10W, 3000K, 5m	10-FPTR1045

ACCESSORIES




ALUMINIUM PROFILE

Dimensions: 1000 (L) x 18.6 (W) x 17.8 (H) mm

Material: Aluminium

Product Code: 10-FP1615P1



FRONT VIEW