



LINE OPAL RECESSED



The LINE OPAL is suitable across both residential and commercial projects. If the four different lengths are not enough, you can connect them together and create your own.

FEATURES

- + Recessed design providing simplicity and functionality
- + Quick and easy connection system
- + Easy installation into ceiling with spring clips attached to fitting
- + Compatible with remote Casambi CBU-TED Bluetooth Controllable Dimmer (71-CASCBU)



GENERAL SPECIFICATIONS

LED	15W 30W 45W 60W
Lumens	1200 lm 2300 lm 3900 lm 4600 lm
Colour	3000K, Warm White 4000K, Cool White
Efficacy	80 lm/w (3000K)
Beam	90°
Material	Aluminium
CRI	90+
Finish	White Black
IP	40
Colour Deviation	SDCM ≤3
Lifetime	L80 >280,000hrs
Warranty	5 Years

ACCESSORIES

Aluminium Joiners	7-LI41CONNECT
-------------------	---------------


PROJECT DETAILS

PROJECT:

TYPE:

NOTES:

DIMENSIONS (mm)

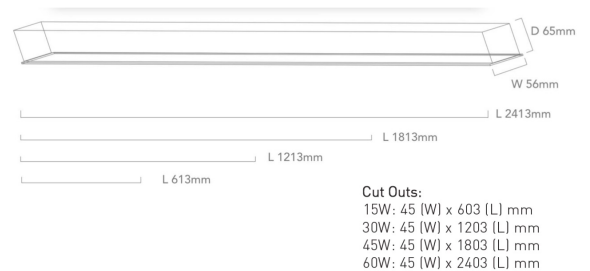

DRIVER SPECIFICATIONS

L 105 x W 43 x H 24 mm

Power	240V Remote Flicker Free Dimmable Driver
Dimming	Phase Cut Dimming
Power Factor	> 0.90

PRODUCT CODES

613mm, 15W, White, 3000K	7-LR560615W903
613mm, 15W, White, 4000K	7-LR560615W904
613mm, 15W, Black, 3000K	7-LR560615B903
613mm, 15W, Black, 4000K	7-LR560615B904
1213mm, 30W, White, 3000K	7-LR561230W903
1213mm, 30W, White, 4000K	7-LR561230W904
1213mm, 30W, Black, 3000K	7-LR561230B903
1213mm, 30W, Black, 4000K	7-LR561230B904
1813mm, 45W, White, 3000K	7-LR561845W903
1813mm, 45W, White, 4000K	7-LR561845W904
1813mm, 45W, Black, 3000K	7-LR561845B903
1813mm, 45W, Black, 4000K	7-LR561845B904
2413mm, 60W, White, 3000K	7-LR562460W903
2413mm, 60W, White, 4000K	7-LR562460W904
2413mm, 60W, Black, 3000K	7-LR562460B903
2413mm, 60W, Black, 4000K	7-LR562460B904



radiantlighting®

www.radiantlighting.com.au

1300 438 609