



The LINE OPAL is suitable across both residential and commercial projects. If the four different lengths are not enough, you can connect them together and create your own.

FEATURES

- + Recessed design providing simplicity and functionality
- + Quick and easy connection system
- + Easy installation into ceiling with spring clips attached to fitting



GENERAL SPECIFICATIONS

LED	15W 30W 45W 60W
Lumens	1000 lm 2000 lm 3000 lm 4000 lm
Colour	3000K, Warm White 4000K, Cool White
Efficacy	Up to 88 lm/w (3000K)
Beam	90°
Material	Aluminium
CRI	90+
Finish	White Black
IP	40
Colour Deviation	SDCM ≤3
Lifetime	L70 >60,000hrs
Warranty	5 Years

ACCESSORIES

Aluminium Joiners 7-LI41CONNECT


PROJECT DETAILS

PROJECT:

TYPE:

NOTES:

DIMENSIONS (mm)

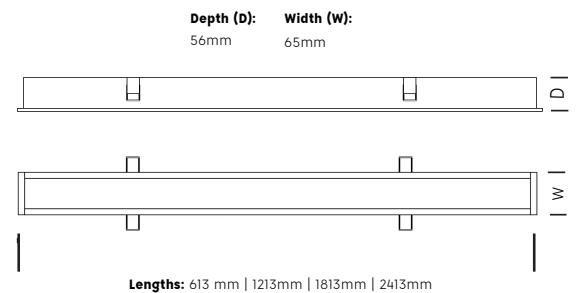

DRIVER SPECIFICATIONS

L 105 x W 43 x H 24 mm

Power	240V Remote Flicker Free Dimmable Driver
Dimming	Phase Cut Dimming
Power Factor	> 0.90

PRODUCT CODES

613mm, 15W, White, 3000K	7-LR410615W903
613mm, 15W, White, 4000K	7-LR410615W904
613mm, 15W, Black, 3000K	7-LR410615B903
613mm, 15W, Black, 4000K	7-LR410615B904
1213mm, 30W, White, 3000K	7-LR411230W903
1213mm, 30W, White, 4000K	7-LR411230W904
1213mm, 30W, Black, 3000K	7-LR411230B903
1213mm, 30W, Black, 4000K	7-LR411230B904
1813mm, 45W, White, 3000K	7-LR411845W903
1813mm, 45W, White, 4000K	7-LR411845W904
1813mm, 45W, Black, 3000K	7-LR411845B903
1813mm, 45W, Black, 4000K	7-LR411845B904
2413mm, 60W, White, 3000K	7-LR412460W903
2413mm, 60W, White, 4000K	7-LR412460W904
2413mm, 60W, Black, 3000K	7-LR412460B903
2413mm, 60W, Black, 4000K	7-LR412460B904